

Everything for your LPG business – anywhere in the world

The Kosan Crisplant name is renowned throughout the world of LPG – famous for integrity, reliability, technological excellence and our ability to meet even the most demanding client requirements.

We have committed ourselves to become your preferred supplier of quality products and services for your LPG business. Products, Systems, Contracting & Engineering and On-site Service – we cover the entire spectrum. All you need is just one supplier!

First class worldwide service

To accommodate our clients, in recent years we have strengthened our service organisation through an extensive – and growing – global service network. This network is handled directly by our service centres and service partners around the world. All staff has been trained by Kosan Crisplant to offer our clients the best service in accordance with local requirements and conditions.

Wherever you are, we are ...

The essence is closeness to the client by presence on the market. This way we are able to respond quickly and efficiently to all our clients' inquiries and so be your first choice business partner.

Local service centres

Our unique service concept gives our clients the advantages of face-to-face consultancy, when needed, visit on site and availability of spare parts and single machines in stock – in a Kosan Crisplant service centre near you!

Business Unit for Components and Parts International - CPI

To be sure that we are 100% focusing on your needs, we have created a new Business Unit taking care of supporting our local service centers. Our main goal is no other than to serve those who need to be served.

To constantly improve our service we have made this catalogue containing the most common components and parts.

“Your Needs Are Our Business”



| PRODUCTS | SYSTEMS | CONTRACTING & ENGINEERING | ON-SITE SERVICES |
|-----------------------|------------------------|---------------------------|---------------------|
| Single machines | Filling systems | Turnkey projects | Facility management |
| Components & software | Reconditioning systems | Automation projects | Service |
| Spare parts | Upgrading systems | Upgrading projects | Operation support |



| | | |
|----------|--|------------|
| A | LPG Truck Equipment | 5 |
| B | LPG Tank Equipment | 17 |
| C | LPG Bulk Storage Equipment | 37 |
| D | Instrumentation and Telemetry | 59 |
| E | Pressure Regulators | 71 |
| F | Ball Valves and Accessories | 79 |
| G | Gas and Fire Detection | 89 |
| H | Domestic and Commercial LPG Cylinders Installations | 103 |

LPG Truck Equipment

***Kosan Crisplant is able to offer
LPG bulk transport trailers and
bobtail delivery trucks as well
as all necessary equipment
and accessories that are
needed for a safe and efficient
operation.***

In order to build a bobtail truck / trailer or simply make the necessary regular maintenance, several special products are needed. According to different countries or customer specifications, you may need part of the bellow products:

- Internal valves and accessories
- Automatic internal valves for bobtail delivery trucks, transports and large stationary storage tanks
- Full Internal Pressure Relief Valves for bobtail delivery trucks and transport
- Level gauging bobtail delivery trucks and transports – Manual and Magnetic
- Globe Valves and Angle Valves – See chapter 3
- Ball Valves – See chapter 6
- Pumps for Bobtail delivery trucks and transport
- By Pass valves for bobtail delivery trucks and transports
- Filters – See chapter 3
- Excess Flow Valves – See chapter 2
- Check Lock – See chapter 2
- Hose end Valves
- Meters for bobtail delivery trucks and transports
- Reels
- Hoses – See chapter 3

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

Application

Depending on size and capacity, they are installed on LPG bobtail delivery trucks, LPG transport trucks or even large stationary storage tanks, flanged pumps or piping. This kind of valves may close automatically when the flow is higher than a certain value or when the differential pressure of the pump unit drops drastically.

Internal valve operation may be manual, pneumatic or by cable. Pneumatic actuators work with pressurized air or Nitrogen from 3,44 bar to 10,34 bar and they are equipped with a thermal fuse for thermal protection.

The possibility of right or left lever on the 3" size allows easy installation without the need of extra pulley. On the cable application, a remote thermal release may be applied to ensure the closure of the valve in case of high temperature.

3" FLANGED INTERNAL VALVE FOR BOBTAIL DELIVERY TRUCKS, TRANSPORTS AND LARGE STATIONARY STORAGE TANKS

| REGO Part Number | | Lever position | Inlet connection | Outlet connection | LPG Closing flow (l/min) | Pneumatic actuator |
|--------------------|--------------------|----------------|----------------------------------|------------------------|--------------------------|--------------------|
| Single flange body | Double flange body | | | | | |
| A3217FR160 | A3217DFR160 | Right | 3" ANSI 300 RF modified flange * | 3 " ANSI 300 RF Flange | 605 | A3217FPA |
| A3217FL160 | A3217DFL160 | Left | | | | A3217FLPA |
| A3217FR210 | A3217DFR210 | Right | | | 795 | A3217FPA |
| A3217FL210 | A3217DFL210 | Left | | | | A3217FLPA |
| A3217FR260 | A3217DFR260 | Right | | | 984 | A3217FPA |
| A3217FL260 | A3217DFL260 | Left | | | | A3217FLPA |
| A3217FR410 | A3217DFR410 | Right | | | 1551 | A3217FPA |
| A3217FL410 | A3217DFL410 | Left | | | | A3217FLPA |

4" FLANGED INTERNAL VALVE FOR TRANSPORTS AND LARGE STATIONARY STORAGE TANKS

| REGO Part Number | Inlet connection | Outlet connection | LPG Closing flow (l/min) | Pneumatic actuator | Remote thermal release |
|------------------|-----------------------------------|-----------------------|--------------------------|--------------------|------------------------|
| A3219FA400L | 4" ANSI 300 RF modified flange ** | 4" ANSI 300 RF flange | 1514 | A3219FPA | A3219RT(2) |
| A3219FA600L | | | 2271 | | |

* (Modified bore - 4 5/8" diameter with 5 3/4" diameter raised face)

** (Modified bore - 5 7/8" diameter with 7" diameter raised face)



A3217FPA on A3217FR Single Flange Valve




A3217FPA




A3217 FR Series

1 1/4" THREADED INTERNAL VALVE FOR SMALL CAPACITY PUMPING SYSTEMS AND BOBTAIL VAPOR EQUALIZATION

| Rego Part Number | Inlet connection | Outlet connection | LPG Closing flow (l/min) | Propane Vapour Capacity (m3/h) | | Thermal Latch | Pneumatic Actuator |
|------------------|------------------|-------------------|--------------------------|--------------------------------|----------|---------------|---------------------|
| | | | | @1.72bar | @6.89bar | | |
| A3209D050 | 1 1/4" | | 189 | 376 | 648 | A3209TL | A3209PA A3209PAF |
| A3209D080 | | | 302 | 444 | 756 | | |
| A3209DT050 | | | 189 | 376 | 648 | | |
| A3209DT080 | | | 302 | 444 | 756 | | |

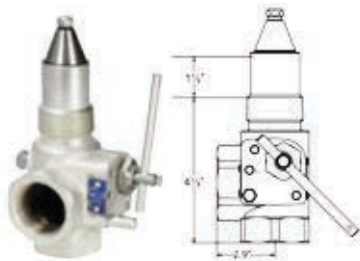

A3209DT

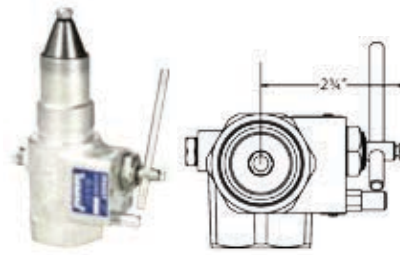

A3209DT

3" THREADED INTERNAL VALVE FOR BOBTAIL DELIVERY TRUCKS, TRANSPORTS AND STATIONARY STORAGE TANKS

| Rego Part Number | Connections (NPT) | | Closing flow (l/min) | | Propane Vapour Capacity (m3/h) | | Aproximate Dimensions (mm) | | | | | | Accessories | |
|------------------|-------------------|----------|----------------------|---------------|--------------------------------|----------|----------------------------|-----|-----|----|-----|-----|---------------|--------------------|
| | Inlet M | Outlet F | Half coupling | Full coupling | @1.72bar | @6.89bar | A | B | C | D | E | F | Thermal Latch | Pneumatic Actuator |
| A3213R150 | 3" | | 567 | 473 | - | - | 38 | 149 | 108 | - | - | 181 | A3213TL | A3213PA |
| A3213R200 | | | 757 | 605 | 1248 | 2127 | | | | | | | | |
| A3213R300 | | | 1135 | 946 | 1639 | 2562 | | | | | | | | |
| A3213R400 | | | 1514 | 1230 | 2021 | 3434 | | | | | | | | |
| A3213RT150 | | | 567 | 473 | - | - | 38 | 202 | 108 | 98 | 114 | 89 | | |
| A3213RT200 | | | 757 | 605 | 1248 | 2127 | | | | | | | | |
| A3213RT300 | | | 1135 | 946 | 1639 | 2562 | | | | | | | | |
| A3213RT400 | | | 1514 | 1230 | 2021 | 3434 | | | | | | | | |

2" THREADED INTERNAL VALVE FOR BOBTAIL DELIVERY TRUCKS, TRANSPORTS AND STATIONARY STORAGE TANKS

| Rego Part Number | Connections (NPT) | | Closing flow (l/min) | | Accessories | |
|------------------|-------------------|----------|----------------------|---------------|---------------|--------------------|
| | Inlet M | Outlet F | Half coupling | Full coupling | Thermal Latch | Pneumatic Actuator |
| A3212R105 | 2" | | 397 | 246 | A3213TL | A3213PA |
| A3212RT105 | | | | | | |
| A3212R175 | | | 662 | 378 | | |
| A3212RT175 | | | | | | |
| A3212R250 | | | 946 | 492 | | |
| A3212RT250 | | | | | | |



A3213R



A3212R

Automatic Internal Valves for Bobtail Delivery Trucks, Transports and Large Stationary Storage Tanks

Application

They may be used on bobtail delivery trucks, transports or large stationary tanks. The operation of this kind of valve is fully automatic as the opening or closing is synchronized with pump on/off position using the built-in differential pressure.

In case of excess flow, causing extreme decrease of pump differential pressure, the valve will close. Main advantages of using this kind of valve are: improper sizing of excess flow valve is eliminated, elimination of operator's errors, cable problems never occur, easily built-in filter, no need of cables or air lines checking, etc.

This kind of valve has built-in visual indicator in order to recognize if the valve is open or closed.



A783FK

FLOMATIC INTERNAL VALVE FOR BOBTAIL DELIVERY TRUCKS, TRANSPORTS AND LARGE STATIONARY STORAGE TANKS

| Rego Part Number | Inlet connection | Outlet connection | Strainer width (mm) | Base Width (mm) | Height (mm) | Height from indicator to base (mm) | Included accessories | |
|------------------|------------------|-------------------|---------------------|-----------------|-------------|------------------------------------|----------------------|-------------|
| | | | | | | | Filter | 3-way valve |
| A7883FK | 3" – ANSI 300 * | 3" – ANSI 300 | 120 | 209 | 276 | 122 | A7884-201 | A7853A |
| A7884FK | 4" – ANSI 300 ** | 4" – ANSI 300 | 146 | 254 | 285 | 125 | | |


* (With 4 13/16" diameter bore)
 ** (With 5 13/16" diameter bore)

Full Internal Relief Valves for Bobtail Delivery Trucks and Transports

Application

They are installed as primary relief valves on bobtails or transport trucks. In this case, relief valves should be fully installed internally to the container (full internal relief valve), this means that all parts of the valve such as spring, guide, etc. are located below the container connection in order to reduce the risk of damage.

The valve can be installed or removed using an octagonal wrenching broach. The main advantage compared to ordinary relief valves is the Pop-Action design that permits the slight opening when there is a moderate pressure increase and a full "pop" opening when there is a pressure increase beyond a predetermined point. Trucks normally use some other small PRV. For other models of pressure valves consult Section C.

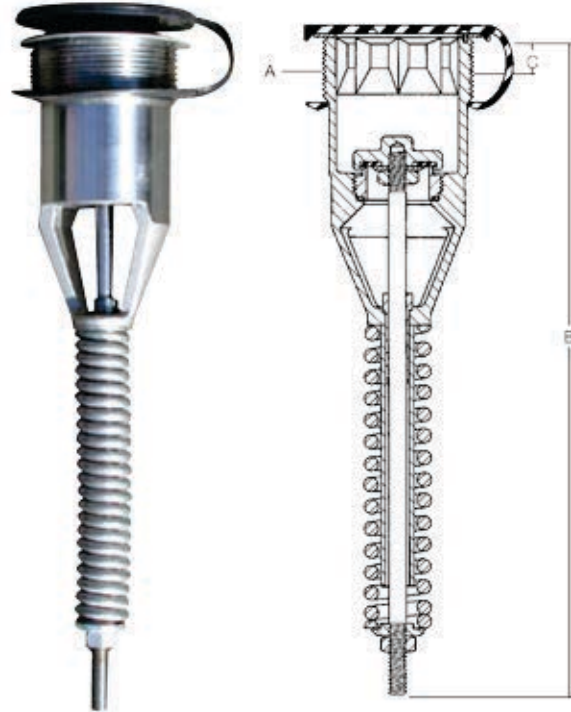

A8434-SERIES

| Rego Part Number | Start to discharge setting (bar) (Approx.) | Container connection A | Approximate dimensions (mm) | | Air flow capacity at 120% of set pressure (m3/h) * | | Application up to surface area** (Approx.) | Protective cap Included |
|------------------|--|------------------------|-----------------------------|-------|--|------|--|-------------------------|
| | | | B | C | UL | ASME | | |
| A8434N | 18,27 | 2" M NPT | 230 | 12,70 | 104 | 103 | 16 | A8434-11B |
| A8434G | 17,24 | | | | | 97 | | |
| A8436N | 18,27 | 3" M NPT | 454 | 19,05 | 289 | 271 | 55 | A8436-11B |
| A8436G | 17,24 | | | | | | | |

* Other settings under request

** According NFPA Pamphlet #58, Appendix D. Surface area is for UL or ASME flow rate – whichever is large

Level Gauging - Manual & Magnetic

Application of Manual Gauging

Assures accurate information about LPG level inside the tank.

They can be installed in end or side mounting position depending on model / tank size with 3/4" or 1" male adapter.

During measuring operation, the vent valve must be open and the dip tube should be rotated slowly from the vapor side of the storage tank to the liquid side.

The liquid discharge informs that the liquid was reached by deep tube. At this point, dial indicates the level of liquid.

A compensation temperature scale is printed on the dial in order to avoid over filling

| Rego Part Number | | Inside diameter limits (mm) | | | Tank connection | Dial |
|--------------------------------|----------------------|-----------------------------|-------------|---------------------|-----------------|--|
| For mobile or stationary tanks | For stationary tanks | Ellipsoidal heads | | Hemispherical heads | | |
| | | Side mounted | End mounted | Side & End mounted | | |
| 9091RM24 | - | 762-1143 | 762-1905 | 762-1143 | 1" | A9091-18L – All sizes A9001-18LX – Over 4,6m3 |
| 9092RM36 | - | 1168-1549 | 1930-2743 | 1168-1549 | | |
| 9093TSM48* | 9093RSM48 | 1574-2006 | 2768-3733 | 1574-2006 | | |
| 9094TSM60* | 9094RSM60 | 2032-2514 | - | 2032-2514 | | |
| 9095TSM72* | 9095RSM72 | 2540-3733 | - | 2540-3733 | | |
| +2070CO | - | | | 1016 | 3/4" | Included |
| +2070CO | - | | | 1524 | | |


9090 series – Dip tube must be cut at the length of 1/2 ID – 146,05mm

2070 series - Dip tube must be cut at the length of 1/2 ID – 12,70mm when center line mounted

* - Supported design



Rotogage® Assembly

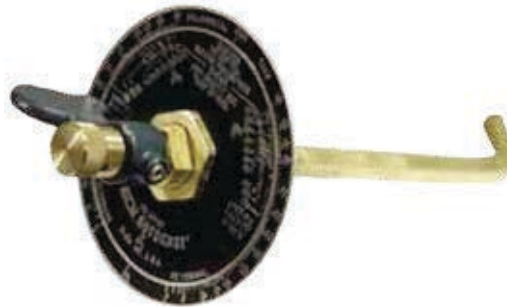

2070 Series

Another way of measuring the level of LPG inside the container is by using the vent valves.

This kind of accessory is normally used in order to realize when the liquid reaches the maximum allowable level by attaching the vent valve to a fixed and predetermined length of dip tube.

When liquid appears (bleed), the filling operation should be stopped immediately.

| Rego Part Number | Connection | Warning name plate |
|------------------|------------|--------------------|
| 3165C | 1/4" M NPT | 2550-40P |
| 3165S | | |
| TSS3169 | | |



3165C



3165S



TSS3169

Level Gauging Bobtail Delivery Trucks and Transports - Manual & Magnetic

Application of Magnetic Gauging

By using a float it is possible to have permanent information about liquid level inside the tank.


The transmission from the mobile parts to the dial is made by magnetic coupling, this means that there is no mechanical connection between the dial pointer and the parts inside the tank, which makes it possible to exchange a damaged dial by a new one without the need of gas evacuation.

Dial should have compensation scale for temperature and different density of the LPG.


For mobile application, a spring shock absorber is used to eliminate the vibrations. For correct sizing it is necessary to provide: (i) internal and external tank diameter (ii) riser dimension (iii) mounting position (iv) typical pressure and temperature.

Mounting

Information about mounting position is required: In case of straddle mounting order add a suffix "X" to the model number.



| Part Number | Mounting | Dial (5 to 95%) | Head | Support center shaft Float arm | Counter balance | Magnet | Gears | Gasket | Applications |
|-------------|----------------------------------|-----------------|------|-----------------------------------|----------------------|--------|-------|--|----------------|
| M633911 | Side, End Angle up to ±45° | 100mm | SS | SS | Cadmium plated steel | AlNiCo | SS | Teflon Filles 304 SS Spiral wound | LPG and others |
| M634211 | | | | | | | | | |

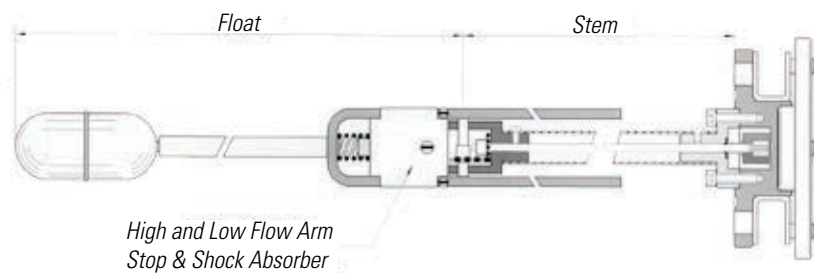

Replacement of Rotogage

A magnetic gauge version is available, too, for substitution of the manual rotary dip tube gauge described earlier. In this case, there is a thread 1" NPT adapter that may be connected to the tank.

The dial is supplied with 100 mm dial. Depending on the application, aluminium and stainless steel constructions are available for stationary tanks up to 2200mm diameter.

| Tank diam. | Application | Model | Head&Body, Gear Housing | Float bulb | Gasket |
|------------|-------------|-------|-------------------------|-----------------|----------------|
| 300-2000 | Stationary | P6293 | Aluminium, Plastic | Nitril rubber | Buna-N |
| 2001-2200 | Stationary | P6493 | Stainless Steel | Stainless Steel | Teflon/St. St |
| 300-1500 | Mobile | P6493 | Stainless Steel | Stainless Steel | Teflon/St. St. |



P6293

Pumps for Bobtail Delivery Trucks and Transports

Application

The most well-known pump application on bobtails or transport trucks is the vane type as this is specifically designed to operate on the very demanding conditions such as high differential pressure, pump overspeeding, poor suction conditions and the high loads from PTO systems that, anyway, may be avoided in case of hydraulic motor installation.

Furthermore, depending on each location, specific conditions may occur, such as long distances, big level differences between truck pump and tank as well as important flow restrictions on the filling valves. Appropriate vane pump selection will overcome these restrictive piping arrangements.

Factory adjusted internal pressure relief valve allows to keep capacity at differential pressures, and the setting should not be changed. Easy mechanical seal replacement and long life of auto adjusted vanes make the maintenance simple

| Pump Speed (RPM) | Differential Pressure (bar) | Approximate flow capacity (l/min) | Motor required | Pump Torque Required (N.m) |
|------------------|-----------------------------|-----------------------------------|----------------|----------------------------|
| Z2000 | | | | |
| 500 | 3.45 | 197 | 1.4 | 27.7 |
| 500 | 6.89 | 174 | 2.9 | 55.3 |
| 600 | 3.45 | 238 | 1.7 | 27.7 |
| 600 | 6.89 | 208 | 3.5 | 55.3 |
| 650 | 3.45 | 261 | 1.9 | 27.7 |
| 650 | 6.89 | 231 | 3.8 | 55.3 |
| 750 | 3.45 | 303 | 2.2 | 27.7 |
| 750 | 6.89 | 265 | 4.3 | 55.3 |
| Z3200 | | | | |
| 500 | 6.89 | 235 | 4,3 | 82,6 |
| 500 | 3,45 | 265 | 2,8 | 54,1 |
| 600 | 6,89 | 288 | 5,9 | 87,9 |
| 600 | 3,45 | 326 | 3,7 | 56 |
| 650 | 6,89 | 318 | 6,1 | 89,9 |
| 650 | 3,45 | 360 | 3,9 | 57 |
| 750 | 6,89 | 3,75 | 7,4 | 94 |
| 750 | 3,45 | 424 | 4,6 | 58,9 |
| Z4200 | | | | |
| 500 | 6,89 | 787 | 12,4 | 237,3 |
| 500 | 3,45 | 893 | 6,2 | 118 |
| 600 | 6,89 | 961 | 14,8 | 237,3 |
| 600 | 3,45 | 1094 | 7,3 | 118 |
| 650 | 6,89 | 1052 | 16,1 | 237,3 |
| 650 | 3,45 | 1196 | 8 | 118 |
| 750 | 6,89 | 1230 | 18,6 | 237,3 |
| 750 | 3,45 | 1397 | 9,3 | 118 |

| Part Number | Corken Coro-Vane® Z Series Pumps | | |
|-----------------------------|----------------------------------|-------------|-------------|
| Model | Z2000 | Z3200 | Z4200 |
| Inlet | 2" NPT | 3" ANSI 300 | 4" ANSI 300 |
| Outlet | 2" | | |
| | NPT | NPT EII | Dual NPT |
| Max RPM | 800 | | |
| Temp. | Min. | -32 °C | |
| | Max. | 107 °C | |
| Max. Working Pressure | 28.6 bar | | |
| Max. Differential Pressure | 8.6 bar | | |
| Outlet Flange Option | No | Yes | No |
| Internal Relief Valve | Yes | | |
| Steel Slip-on flange option | | | |



Z2000



Z3200



Z4200

Approximate flow capacities based on vapor equalizing propane systems without pressure loss in pump suction piping. Restrictions in suction piping such as valves and elbows, missing vapor line (or restriction) or temperatures lower than 21°C will decrease the capacity. The decrease of capacity is related to thermodynamic characteristics of LPG.

Bypass Valves

Application

Bypass valves are typically used to protect the pump by returning the LPG to the tank when there is a pressure increase.

Depending on size, flow capacity, setting and application, there are several models that may be applied.

Setting of the pressure should be possible by the adjustment of different springs. Some models may require pressure sensor line.

| Corken bypass valve | B166B | T166 | ZV200 | B177 |
|-----------------------------------|----------------------------|------------|---------------|----------|
| Inlet | ¾"; 1" | 1 ¼" | 2" (standard) | 2", 2 ½" |
| Outlet | | 1 ½" | | |
| Slip-on flange option | No | No | Yes | |
| Differential pressure range (bar) | 1.7 – 15.5 | 1.7 – 15.5 | 2.8-10.3 | 0.7-8.6 |
| O-ring options | Buna N (others on request) | | | |




B166B



ZV200



B177

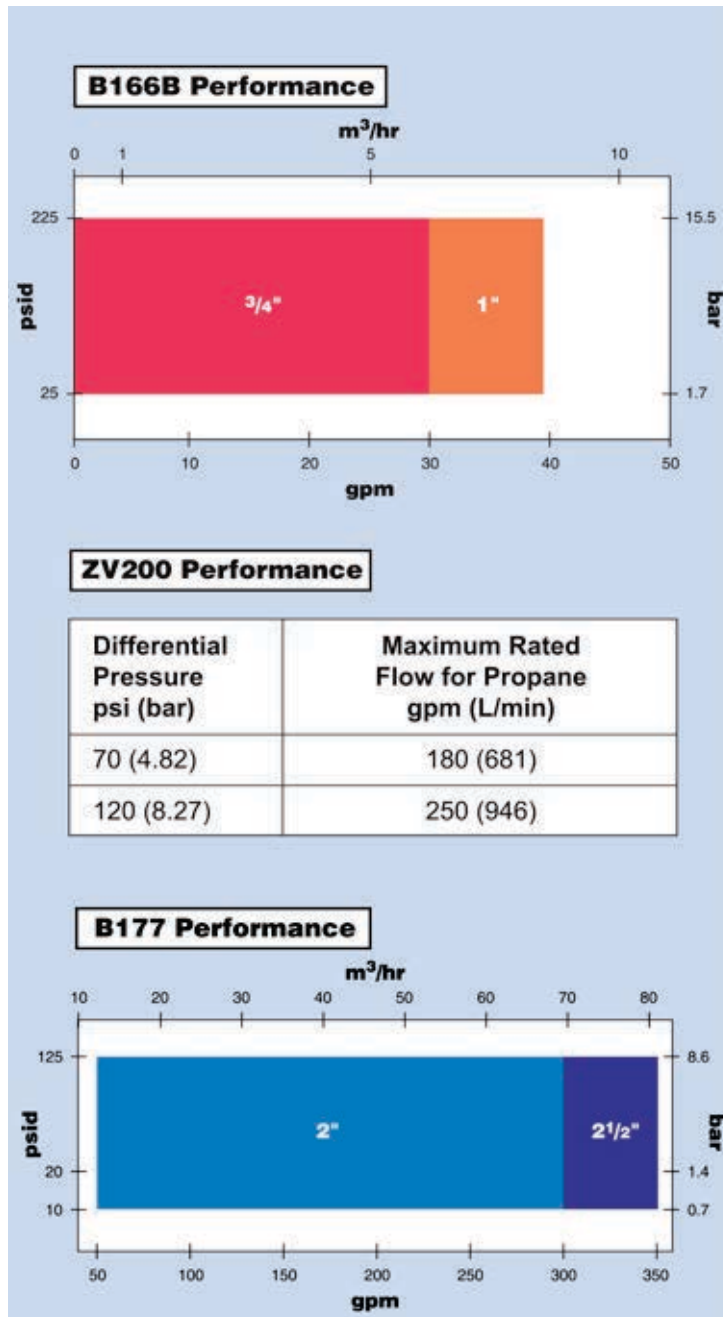

Application

Hose end valves are installed at the end of the hose to create the connection to the tank filler valve.

Being specially designed to minimize the product loss on each filling operation, they are able to open fully when the handle is flipped and shut off instantaneously the opposite way. 360° rotation handle, lock handle feature and easy grip of the filling connector ensure friendly use and high safety standards.



| Rego Part Number | Body | Connections (Female) | | Locking Handle | Cv* @ 0.069bar (l/min) Propane | Filling connectors | | |
|------------------|-------|----------------------|--------|----------------|--------------------------------|--------------------|-------|---------|
| | | Inlet | Outlet | | | Extended | | Compact |
| | | | | | | Steel | Brass | |
| A7793A | Angle | ¾" | 1 ¾" | Yes | 60.5 | - | | |
| A7797A | | 1" | | | | | | |
| A7707L | Globe | 1" | | | 68.1 | A7575L4 | 3175A | A3175A |
| A7708L | Angle | | | | 83.3 | | | |

* - To obtain flow rate for pressure drop values other than 0.069, multiply CV by square root of desired pressure drop x 14.5.



A7708L



A7707L

Meters for Bobtail Delivery Trucks and Transports

Application

LPG meter systems are necessary to measure the quantity of gas delivered by the bobtail or bulk transport trailers to each location.


Apart from the meter itself, the system is usually completed with filter, air release, differential valve and a register (mechanical or electronic).

In some cases the temperature compensation as well as a printing device may also be added. All meters used for legal metrology or deliveries must be controlled by the local Standards Department.

TECHNICAL DATA

| | |
|---------------------------------|--|
| Specification | 2" 4D-MT (LPG meter) |
| Flow rate | 76 to 380 l/min |
| Working temperature | -23°C to 52°C |
| Max. working pressure | 24 bar |
| Inlet connection | Inlet check valve 2" NPT |
| Outlet connection | Companion flange for 1 1/2" or 2" NPT |
| Units of measure | Liter, US Gallon or Gallon |
| Reset wheel capacity | 99.999 liter or 9.999,9 gallon |
| Printing wheel capacity | 99.999 liter or 9.999,9 gallon |
| Totalizer capacity | 99.999.999 liter or 99.999.990 gallon |
| Temperature compensation | Range from -23°C to 52°C compensation to 15°C |
| Register type | 831 & 841* – Mechanical - Register + resettable register 833 & 843* – Same as 831 & 841 + Printer E4000 – Electronic register |
| Materials | Strainer – Mesh 80 stainless steel Housing – Aluminum Measuring chamber – Bronze Piston – Nituff® Teflon® impregnation coating Dynamic seals – Buna N Static seals – Buna N |

83x Series – Gallon
84x Series – Liter

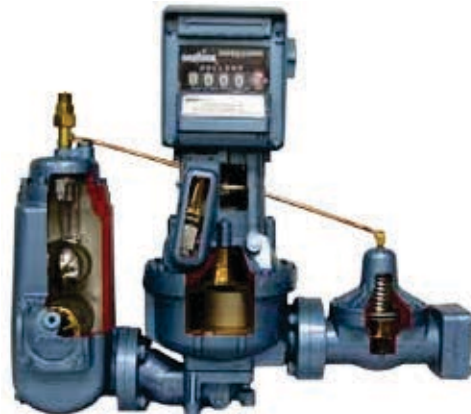

LPG Tank Equipment

***Kosan Crisplant is able to offer
the necessary LPG tank
accessories and equipment
needed for a safe and efficient
operation.***

In order to manufacture an above ground or underground LPG tank or simply make the necessary regular maintenance, several special products are needed to operate with LPG.

According to different country or customer specifications, you may need part of the products:

- Pressure Relief Valves
- Check Locks
- Back Pressure Check Valves
- Filler Valves
- Vapor Equalizing Valves
- Excess Fflow Valves
- Multivalves
- Magnetic Level Gauging
- Liquid Withdraw Valves
- Combination Valves

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

Pressure Relief Valves

Application

There are different types of constructions of relief valves for different uses and according to local regulations or customer specifications. In general, LPG relief valves are used to prevent over-pressure of the tank, piping lines or shut-off valves when there is a possibility of uncontrolled pressure increase.

With regard to construction, versions for internal tank installation or alternatively for external installation are available. The external version requires protection from physical damage as all components are outside the tank. In some cases, pipe-away adapters with break-off groove may be applied in order to prevent any stress on body valve in case of bending.

In order to facilitate the maintenance of LPG tanks with external valves, sets of relief valve plus check devices are available. This kind of solution makes it possible to take out the relief valve for inspection without the need of tank evacuation. (This operation may be

carried out by qualified people, only).

Relief valves manifolds are available for 2, 3 and 4 units. The main advantage is the possibility of replacement / service of any of the valves without the need of tank evacuation or increase of capacity when using more than one valve in service.

All relief valves described below incorporate the Pop-Action design that allows the slight opening when there is a moderate pressure increase and a full "pop" opening when there is a pressure increase beyond a predetermined point.

INTERNAL RELIEF VALVES

| Rego Part Number | Start to Discharge Setting Barg **** | Container connection A (M. NPT) | Approximate dimensions (mm) | | | Air flow capacity at 120% of set pressure (m3/h) * | | Application up to surface area (m2) ** | Accessories | |
|------------------|--------------------------------------|---------------------------------|-----------------------------|----|------------|--|--------|--|----------------|------------------|
| | | | B | C | D (Wrench) | UL | ASME | | Protective Cap | Pipeaway Adapter |
| | | | | | | | | | | |
| 7583G | 17.24 | 3/4" | 208 | 36 | 44 | 3.364 | 3068 | 7.43 | 7583-40X | - |
| 8684G | | 1" | 238 | 39 | 48 | 4.451 | 4358 | 10.5 | 8684-40 | |
| 8685G | | 1 1/4" | 281 | 43 | 70 | 7.450 | 6855 | 19.7 | 7585-40X | |
| 7534B | 8.62 | 2" | 511 | 79 | 90 | 10.236 | - | 29.6 | 7534-40* | 7534-20*** |
| 7534G | 17.24 | | | | | 19.835 | 17.707 | 65.8 | | |


* - Flow rates shown are for bare relief valves. Adapters and pipes-aways will reduce flow capacity.

** - According to NFPA Pamphlet #58, Appendix D. Surface area is for UL or ASME flow rate – whichever is larger. Flow rates shown are for bare relief valves. Adapters and pipe-aways will reduce flow rates


*** - 3" F.NPT outlet connection



7583

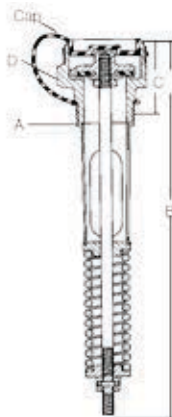

7534

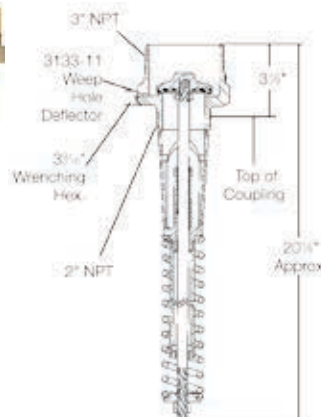

EXTERNAL RELIEF VALVES

| Rego Part Number | Start to Discharge Setting Barg ** | Container connection A (M. NPT) | Approximate dimensions (mm) | | Air flow capacity at 120% of set pressure (m3/h) * | | Application up to surface area (m2) *** | Accessories | | | |
|------------------|------------------------------------|---------------------------------|-----------------------------|------------|--|---------|---|----------------|--|---------------------|---------------------|
| | | | B | C (Wrench) | UL | ASME | | Protective Cap | Pipeaway Adapter | Outlet Size (F.NPT) | Weep Hole Deflector |
| | | | | | | | | | | | |
| A3149L050 | 3.44 | 2 1/2" | 266 | 104 | 4.417 ** | - | 10.49 | 3149-40 | Outlet 3 1/2"-8N (F) thread accepts 3"M. NPT pipe thread | Included | |
| A3149L200 | 13.79 | | | | 14.900 (C) ** | - | | | | | 46.45 |
| 3131G | 17.24 | 3/4" | 87 | 44 | 3.499 | 3.294 | 7.89 | 3131-40+ | - | - | |
| W3132G | | 1" | 153 | 60 | 5.674 | - | 14.31 | 3132-54+ | 3132-10 | 1 1/4" | 3133-11 |
| 3132G | | 1 1/4" | | | 7.016 | - | 18.58 | | - | - | |
| T3132G | | 1 1/4" | 6.439 | - | 16.72 | 3132-10 | 1 1/4" | | | | |
| MV3132G | | | 6.787 | - | 17.65 | - | - | | | | |
| 3135G | | 143 | 68 | 9.803 | - | 27.87 | 3135-54+ | 3135-10 | 2" | | |
| 3133G | | 1 1/2" | 150 | 79 | 10.329 | - | 29.73 | 3133-40+ | 3133-10 | - | |
| A3149G | | 2 1/2" | 266 | 104 | 17.652 | 15.551 | 56.95 | 3149-40+ | Outlet 3 1/2"-8N (F) thread accepts 3"M. NPT pipe thread | Included | |


+ - Cap supplied with chain

** - Other settings on request

* - Flow rates shown are for bare relief valves

*** - Not UL or ASME rated. Rated @ 120 of set pressure by ECII ©

*** - According NFPA Pamphlet #58, Appendix D. Surface area is for UL or ASME flow rate - whichever is the larger. Flow rates shown are for bare relief valves. Adapters and pipe-aways will reduce flow rates

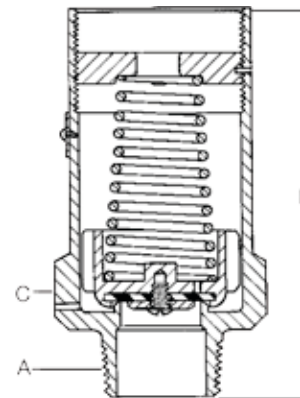


PRESSURE RELIEF VALVES & CHECK DEVICES

| Rego Part Number | Start to Discharge Setting Barg *** | Used on Check Device | Relief Valve Inlet Connection | Overall Height "A" | Wrench Flats "B" | Flow Rating w/ Check Device m3/min (air) |
|------------------|-------------------------------------|----------------------|-------------------------------|--------------------|------------------|--|
| RS3131b15.7 | 15.7 | CD31 | 3/4" M. NPSM | 85 mm | 46 mm | 48.9* |
| RS3131b17.2 | 17.2 | | | | | 51.9* |
| RS3131b17.65 | 17.65 | | | | | 53.1* |
| RS3132b15.7 | 15.7 | CD32 | 1" M. NPSM | 129 mm | 60 mm | 70.1* |
| RS3132b17.2 | 17.2 | | | | | 77.5* |
| RS3132B17.65 | 17.65 | | | | | |
| RS3135b15.6 | 15.6 | CD35 | 1 1/4" M. NPSM | 141 mm | 68 mm | 123* |
| RS3135b17.2 | 17.2 | | | | | 118* |
| RS3136b16 | 16 | CD36 | M36x2 Metric M. | 135 mm | 60 mm | 69.4** |
| RS3136b17 | 17 | | | | | 77.4** |
| RS3136b18 | 18 | | | | | 87.0** |
| RS3145b17 | 17 | CD45 | M45x2 Metric M. | 139 mm | 68 mm | 182.7** |

* -Rated at 110% of set pressure

** - AFNOR rated at 110% of set pressure

| Check Device Part Number | Connections | | Approximate dimensions (mm) | |
|--------------------------|-------------------|--------------|-----------------------------|----|
| | Container (M.NPT) | Inlet (F) | C | D |
| CD31 | 1 1/4" | 3/4" NPSM | 59 | 46 |
| CD32 | | 1" NPSM | | |
| CD35 | 2" | 1 1/4" NPSM | | 62 |
| CD36 | 1 1/4" | M36x2 Metric | 58 | 52 |
| CD45 | 2" | M45x2 Metric | 59 | 62 |

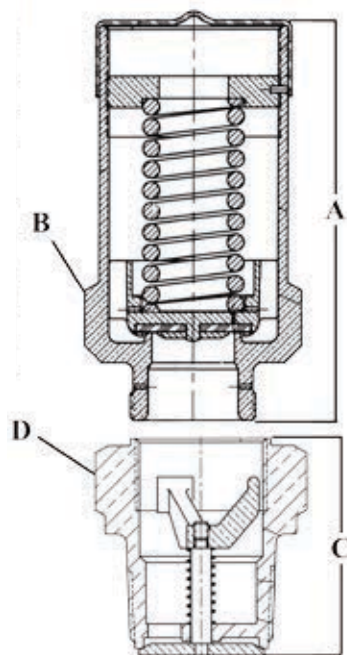


EXTERNAL HYDROSTATIC RELIEF VALVES

| Rego Part Number | Start to Discharge Setting Barg | Body Material | Container connection A (M. NPT) | Approximate dimensions (mm) | | Accessories | | |
|------------------|---------------------------------|-----------------|---------------------------------|-----------------------------|-----------------|----------------|--------------------|----------------|
| | | | | B | C (Wrench) | Protective Cap | Pipeaway | |
| | | | | | | | Adapter or threads | |
| SS8001G | 17.24 | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002G | | | 1/2" | | | | 22 | - |
| SS8021G | | | 1/4" | 35 | 17 | | 1/4" NPSM Thrds | |
| SS8022G | | | 1/2" | | | | 22 | 3/8" NPT Thrds |
| 3127G | 18.96 | Brass | 1/4" | 50 | - | 7545-40 | - | |
| 3129G | | | 1/2" | 65 | | | 28 | 3129-10* |
| 3127H | | | 1/4" | 50 | | | 22 | - |
| 3129H | | | 1/2" | 65 | | | 28 | 3129-10* |
| 3127P | 20.68 | Brass | 1/4" | 50 | 28 | - | - | |
| 3129P | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8022P | | Stainless Steel | | 35 | 22 | - | 3/8" NPT Thrds | |
| 3127J | 24.13 | Brass | 1/4" | 50 | 22 | 7545-40 | - | |
| 3129J | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8001J | | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002J | | | 1/2" | 22 | - | | | |
| SS8021J | | 1/4" | 35 | 17 | 1/4" NPSM Thrds | | | |
| SS8022J | | 1/2" | | | 22 | | 3/8" NPT Thrds | |
| 3127K | 25.85 | Brass | 1/4" | 50 | 22 | 7545-40 | - | |
| 3129K | | | 1/2" | 65 | 28 | | 3129-10* | |
| 3125L | 27.58 | Brass | 1/4" | 40 | 16 | Included | - | |
| 3127L | | | | 50 | 22 | 7545-40 | - | |
| 3129L | | | 1/2" | 65 | 28 | 3129-40P | 3129-10* | |
| SS8001L | | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002L | | | 1/2" | | | | 22 | - |
| SS8021L | | 1/4" | 35 | 17 | 1/4" NPSM Thrds | | | |
| SS8022L | | 1/2" | | | 22 | | 3/8" NPT Thrds | |
| 3127U | 31.03 | Brass | 1/4" | 50 | 22 | 7545-40 | - | |
| 3129U | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8001U | | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002U | | | 1/2" | | | | 22 | - |
| SS8021U | | 1/4" | 25 | 17 | 1/4" NPSM Thrds | | | |
| SS8022U | | 1/2" | | | 22 | | 3/8" NPT Thrds | |

* - 1/2" F. NPT outel connections



3125 Series (.161 Orifice)
3127 Series (.274 Orifice)
3129 Series (.386)

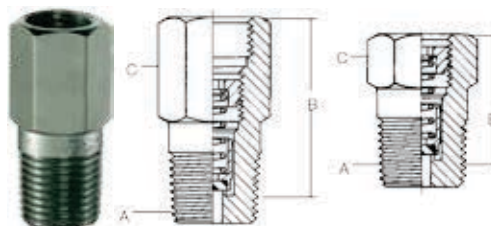

SS8022G
SS8021, SS8022 Series (.156 Orifice)
SS80001, SS8002 Series (.156 Orifice)

RELIEF VALVES MANIFOLDS

| Rego Part Number | Start to Discharge Setting Barg *** | Container Flange Connection | Relief Valve | | | | Air flow capacity at 120% of set pressure (m3/h) * | | |
|------------------|-------------------------------------|-----------------------------|--------------|------------------|-------------------------|---|--|------|------------|
| | | | Qty | Rego Part Number | Inlet Connection M. NPT | Accessories Pipeaway Adapters | UL | ASME | |
| 8542G | 17.24 | 2" | 2 | 3135MG | 1 1/4" | 3135-10+ | 8.919(1) | NA | |
| A8563G | | 3"-300#** | 3 | A3149MG | 2 1/2" | Outlet 3 1/2"-8N (F) thread accepts 3" M.NPT pipe tread | 31.431 (2) | | |
| A8564G | | | 4 | | | | 47.147(3) | | |
| A8573G | | 4"-300# | 3 | A3149G | 2 1/2" | Outlet 3 1/2"-8N (F) thread accepts 3" M.NPT pipe tread | 31.431 (2) | | |
| A8574G | | | 4 | | | | 47.147(3) | | |
| A8563AG | | 3"-300#** | 3 | A3149G | 2 1/2" | Outlet 3 1/2"-8N (F) thread accepts 3" M.NPT pipe tread | NA | | 31.091 (2) |
| A8564AG | | | 4 | | | | 46.552 (3) | | |
| A8573AG | | 4"-300# | 3 | A3149G | 2 1/2" | Outlet 3 1/2"-8N (F) thread accepts 3" M.NPT pipe tread | NA | | 31.091 (2) |
| A8574AG | | | 4 | | | | 46.552 (3) | | |

* - Flow rates shown based on number of relief valves indicated in parenthesis and for bare relief valves. Adapters and pipeways will reduce flow rates

** - For use with modified ANSI 300 flange with 4" port

*** - Other settings on request

+ - 2" F.NPT Outlet connection

| Manifold Series | Flange Size | Flange Drilling | Port Diameter | Flange Gasket |
|-----------------|-------------------------------------|---|---------------|---------------|
| A8560 | Modified 3" 300# (4" port diameter) | (8) 7/8" Bolt Holes on a 6 5/8" Bolt Circle Diameter Flat Faced | 4" | 3" 7564-48 |
| A8570 | 4" ASA 300# | (8) 7/8" Bolt Holes on a 7 7/8" Bolt Circle Diameter 1/16" Raised Faced | 4" | 4" 7565-48 |



8542 Series



A8560
A8570


Application

It permits one shut off valve with adapter to be used on several stationary tanks for liquid withdrawing. In order to be correctly operated, appropriate adapters must be used with the transfer shut off valve.


An excess flow valve is integrated as an important operation feature. The opening and closing of check locks must follow specific procedures. For a safe operation, please be sure to use the check locks correctly.

| Rego Part Number | Connections | | Approximate dimensions (mm) | | | Approximate Propane closing flow (l/min)* | Adapter Rego Part Number | Connections | | Approximate dimensions (mm) | |
|------------------|---------------|--------------|-----------------------------|----|----|---|--------------------------|-------------|--------------|-----------------------------|----|
| | Inlet (M.NPT) | Outlet | A | B | C | | | Inlet | Outlet (NPT) | A | B |
| 7590U | 3/4" | 1 5/8" (UNF) | 41 | 37 | 33 | 75 | 7590U-10 | 1 5/8" UNF | 3/4" F | 44 | 46 |
| 7591U | 1 1/4" | | 37 | 43 | 33 | 132 | | | | 44 | 46 |
| 7572FC | 3/4" | 3/4" | 35 | 41 | | 75 | 7572C-14A | 3/4" M.NPT | | 35 | 25 |
| 7580FC | 1 1/4" | F.NPT | 44 | 38 | | 132 | 7572C-15A | | 3/4" M | | 6 |


* - Based on horizontal installation of excess flow valve. Flow is higher when installed with outlet up and lower when installed with outlet down. Multiply by 0.94 for liquid Butane flow.

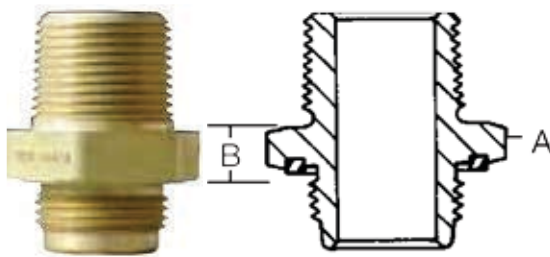

7572C-15A

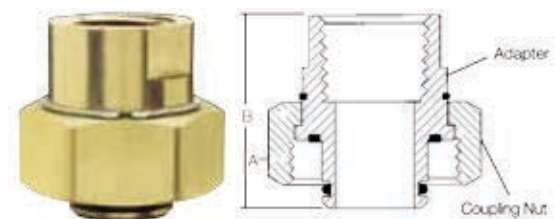


7590U-10

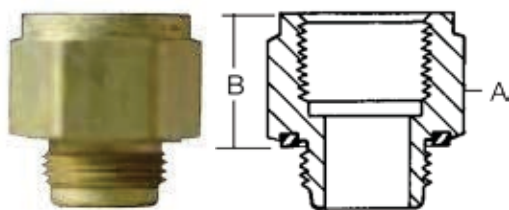

7572C-14Ac



7572Fc
7580FC

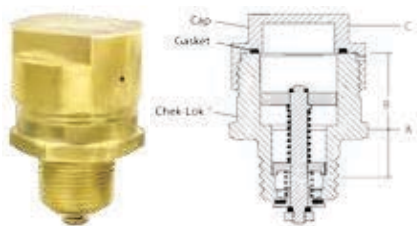

7590U

Back Pressure Check Valves

Application


Installed to assure only one direction of flow (normally into the tank). The seat is normally closed by a spring force avoiding the possibility of flow from inside the tank.

When the flow starts, the force generated by the spring will be lower than the force created by the pressure allowing the opening of the seat. In case of inexistent flow or reverse flow, the seat will move to closed position. Small amounts of leakage on closed position are to be expected as it is a metal to metal seat.


| Rego Part Number | | Connections (NPT) | Approx. dimensions (mm) ** | | Approx. Propane liquid capacity (l/min) | | | | Obs. |
|------------------|----------|-------------------|----------------------------|----------|---|-----------|-----------|-----------|---------------------------------------|
| Brass | Steel | A & B | C | Length D | 0,345 Bar | 0,689 Bar | 1,723 Bar | 3,447 Bar | |
| 3146 | A3146 | ¾" | 35 | 49 | 41 | 60 | 94 | 136 | Flat seat |
| 3146S* | | | | | | | | | |
| 3176 | A3176 | 1 ¼" | 50 | 35 | 105 | 151 | 238 | 336 | |
| | A3276BC* | | | 63,5 | 121 | 170 | 276 | 389 | |
| | A3186 | 2" | 73 | 61,9 | 469 | 662 | 1044 | 1480 | |
| | A3187S* | 2" M 1 ¼" F | 60 | 111,1 | 227 | 416 | 851 | 1324 | |
| | A3196 | 3" | 100 | 100 | 1124 | 1589 | 2513 | 3554 | |
| 6586D | A6586D | 2" | 73 | 62 | 1021 | 1021 | 1589 | 2271 | Swing away seat |
| | A3400L4 | Male 2" | 133 | 33 | 844 | 1196 | 1892 | 2675 | Flange thread installation, flat seat |
| | A3400L6 | Male 3" | 134 | 40 | 1604 | 2271 | 3591 | 5079 | |

* - Soft seat


** - For betane liquid capacity (l/min) multiply by 0,14

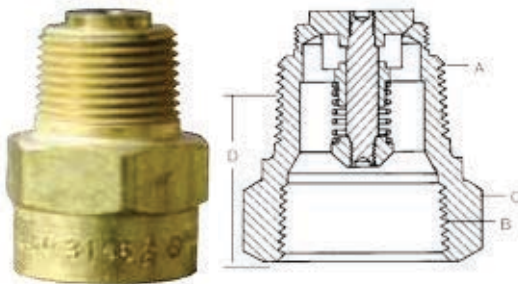


3146 Series, 3176 Series, A3186, A3196_Part2

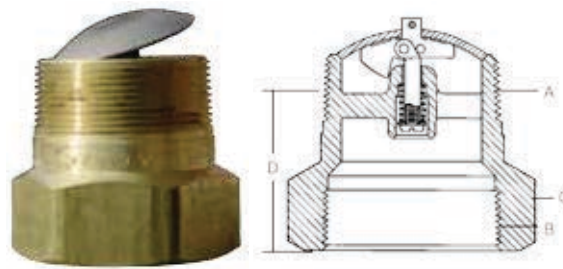

6586D

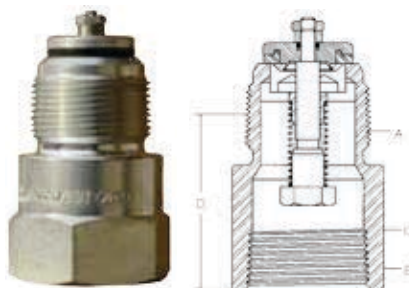

A3276BC

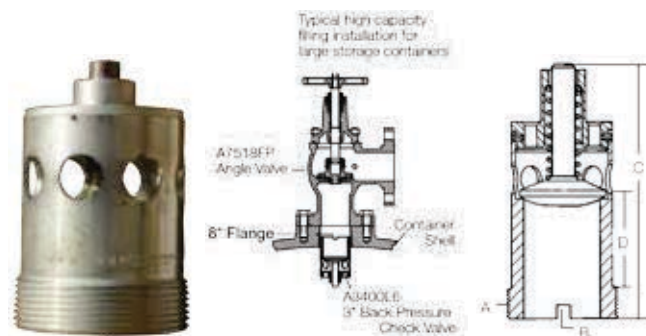

A3400L6

Application

There is a wide range of sizes and capacities that may be installed on different applications such as bobtail delivery trucks, transport trucks or stationary tanks. Two versions are available: the double check type and the single check type.



Apart from a soft seal filling valve, the double check version also incorporates a lower metal to metal back pressure valve allowing the emergency maintenance / replacement of upper part of valve without the need of tank evacuation (even with a low leakage). In case of hose rupture, the bottom back valve will prevent tank leakage as well as minimize leakage in case of bad functioning of the upper part.

Models with lower swing away back pressure valve are suitable for high filling rate needs. In case of single check version installation, an independent back pressure valve should be installed in order to assure maximum safety standard.

There are also available double check filler valves with manual shutoff system. In this case, a ¼" turn ball valve is integrated on the body valve between the lower check and upper check (normally designated as the filler valve) increasing the safety of operation.

MANUAL SHUTOFF DOUBLE CHECK FILLER VALVES

| Rego Part Number | Tank Connection M. NPT | Acme Hose Connection | Propane Liquid Capacity at 1 bar differential pressure litres /minute | Propane Liquid Capacity at 1.7 bar differential pressure litres /minute | Propane Liquid Capacity at 3.7 bar differential pressure litres /minute |
|-----------------------|------------------------|----------------------|---|---|---|
| | B | A | | | |
| 7501 Straight Through | 1-1/4" | 1-3/4" | 233 | 344 | 473 |
| 7502 Angle | 1-1/4" | 1-3/4" | 233 | 344 | 473 |

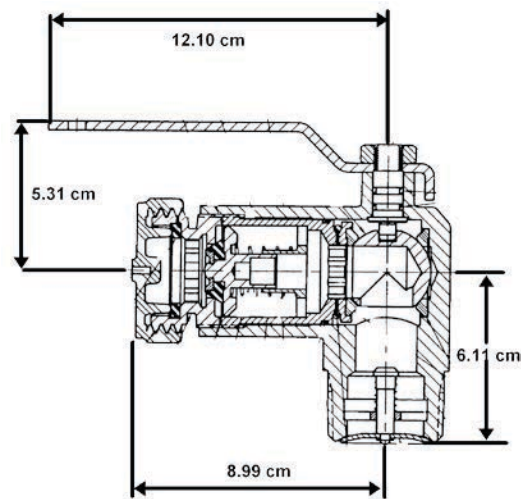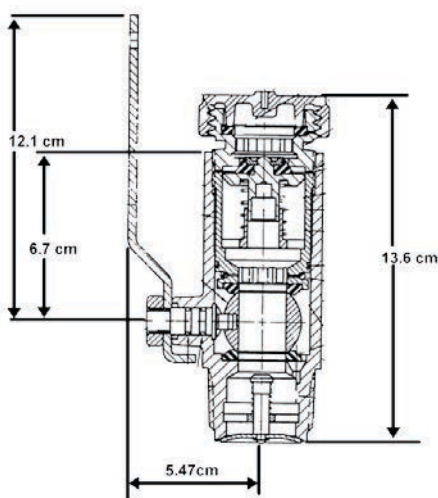


STANDARD FILLER VALVES


| Rego Part Number | | Hose connection ACME | Tank connection | Wrench hex flats (mm) | (Approx.) Effective length | Approx. Propane liquid capacity (l/min) | | | | | Check type | Use back check valve | Obs. |
|------------------|--------------------------|----------------------|-----------------|-----------------------|----------------------------|---|-----------|-----------|-----------|-----------|------------|----------------------|------|
| With Cap | With Cap, chain and ring | A | B | C | D | 0,345 Bar | 0,689 Bar | 1,723 Bar | 3,447 Bar | 5,171 Bar | | | |
| 7579 | 7579C | 1 3/4" | 1 1/4" | 48 | - | 189 | 264 | 420 | 594 | 726 | Double | - | - |
| 7579P | - | | | | | 140/ | 196 | 310 | 439 | 537 | | | |
| 6579 | 6579C | | | | | 295 | 416 | 658 | 931 | 1139 | | | |
| - | 7579S | 2 1/4" | 1 1/2" | 51 | 68,07 | 166 | 234 | 370 | 526 | 643 | Double | - | - |
| - | 6587EC | | 2" | 73 | 111 | 348 | 492 | 779 | 1101 | 1347 | | | |
| - | 3197C | 3 1/4" | 3" | 102 | 165,10 | 560 | 794 | 1256 | 1779 | 2176 | Single | 3176 | - |
| 3174C | - | 1 3/4" | 1 1/4" | 43 | - | 87 | 124 | 196 | 280 | - | | | |
| - | 6584C | 2 1/4" | 2" | 57 | - | 590 | 832 | 1317 | 1862 | - | | | |
| - | 3194C | 3 1/4" | 3" | 87 | - | 556 | 787 | 1245 | 1760 | - | A3196 | - | |



7579S





3197C




3174C



7579P

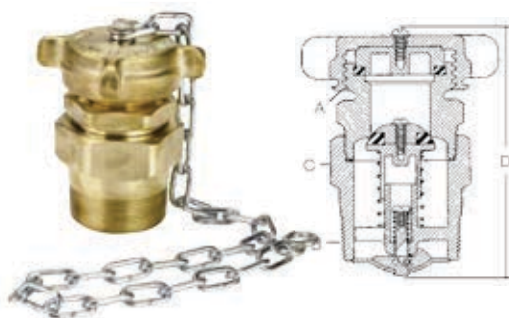


6587EC




3194C



6579



7679



Vapor Equalizing Valves


Application

Vapor equalizing valves may be used for transfer of vapor between two tanks (stationary and/or mobile) for filling operations improving the operation time.


Two versions are available: the double check and the single check versions. Apart from the upper check version that opens with the attachment of a vapor coupling allowing the vapor flow in both directions, the double check version also incorporates a lower excess flow valve as safety feature in case of hose rupture.

When the hose coupling is detached, the valve (upper check) automatically closes. In case a single check version is installed, an independent excess flow valve should also be installed in order to assure maximum safety standard.

| Rego Part Number | | Hose connection ACME (A) | Tank connection (B) | Wrench hex flats (C) | Approx. dimensions (mm) (D) | Approx. Closing low (m ³ /h) @ 6,9 bar | Check type | Use excess flow valve |
|------------------|--------------------|--------------------------|---------------------|----------------------|-----------------------------|---|------------|-----------------------|
| With Cap | With Cap and chain | | | | | | | |
| 7573D | 7573DC | 1 ¼" | ¾" | 31 | 52 | 116 | Double | - |
| - | 3183AC | 1 ¾" | 1 ¼" | 50 | 77 | 283 | | |
| 3170 | - | 1 ¼" | ¾" | 31 | 39 | 215 | Single | 3272E |
| - | 3180C | 1 ¾" | 1 ¼" | 44" | 42 | 283 | | 3282A |

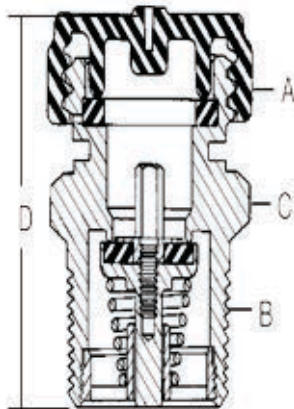

3170

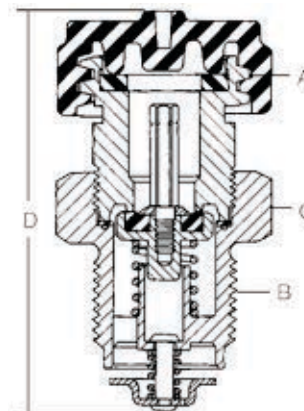

7573

Application

They can be installed on pipe line service and on the container service when it is important to limit the liquid or vapor flow rate. The seat disk is normally opened by a spring force. When the flow rate is high enough to create a pressure drop able to produce a force bigger than the spring load, the seat will close.

The equalizing of the pressure on both sides of the seat disk is possible as there is a bleed hole. This means that the excess flow valve does not shut off completely and there is always a minimum flow.

During installation the correct installation direction must be respected (an arrow on the valve body indicates the flow direction) as the feature of the valves only works in one way despite the fact that it allows flow in both directions.


Capacities published by manufacturers refer to the valve itself and not to its installation on different layouts. The excess flow valve is usually sized for +50% of the standard flow.

| Rego Part Number | Material | Connections (NPT) | | Approx. Dimensions (mm) | | | Approx. closing flow rates Propane ** | | | Typical application |
|------------------|----------|-------------------|----------|-------------------------|--------|-------|---------------------------------------|--------------|-----------|---|
| | | A Inlet | B Outlet | C | D | E | Liquid (l/min) | Vapor (m3/h) | | |
| | | | | | | | | 1,723 bar | 6,896 bar | |
| 1519C2 | Brass | 1 ½" Male * | 1" | 57,15 | 52,37 | 68,24 | 94 | 141 | 249 | Top mounting on manhole covers |
| 1519C4 | | 2" Female | 2" | 76,2 | 115,87 | - | 643 | 809 | 1375 | Piping |
| 1519A2 | Brass | 1" | 1" | 44,45 | 100 | - | 94 | 141 | 249 | Top installation in any position in liquid or vapor lines |
| A1519A2 | Steel | | | | | | | | | |
| 1519A3 | Brass | 1 ½" | 1 ½" | 57,15 | 101,6 | - | 227 | 325 | 571 | |
| 1519A4 | | 2" | 2" | 76,2 | 115,87 | - | 378 | 537 | 976 | |
| A1519A4 | Steel | | | | | | | | | |
| 1519B4 | Brass | | | | | | 503 | 784 | 1423 | |
| A1519B4 | Steel | | | | | | | | | |
| A1519A6 | | 3" | 3" | 101,6 | 165,88 | - | 851 | 1273 | 2321 | |
| 12472 | Brass | 3/4" | 3/4" | 34,92 | 34,92 | - | 15 | 29 | 48 | Vapor or liquid use for filling, withdrawal vapor equalizing in container or line application |
| 3272E | | | | | | | 37 | 59 | 104 | |
| 3272F | | | | | | | 56 | 79 | 141 | |
| 3272G | | | | | | | 75 | 104 | 195 | |
| A3272G | Steel | | | | | | | | | |
| 3282A | Brass | 1 ¼" | 1 ¼" | 50,8 | 49,21 | - | 113 | 165 | 283 | |
| 3282B | | | | | | | 151 | 215 | 385 | |
| 3282C | | | | | | | 189 | 254 | 461 | |
| A3282C | Steel | | | | | | | | | |
| 7574 | Brass | 1 ½" | 1 ½" | 57,15 | 44,45 | - | 340 | 430 | 795 | |
| 7574L | | | | | | | 264 | 396 | 707 | |
| 3292A | | 2" | 2" | 73,02 | 47,62 | - | 283 | 402 | 702 | |
| A3292A | Steel | | | | | | | | | |
| 3292B | Brass | | | | | | 378 | 512 | 925 | |
| A3292B | Steel | | | | | | | | | |
| A3292C | | | | | | | 461 | 625 | 1064 | |


* - Female dip pipe connection

** - For butane capacity multiply by 0,94


Excess Flow Valves

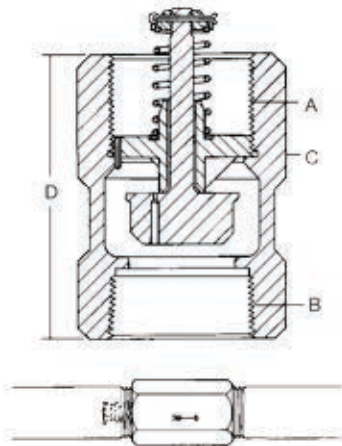


1519C4

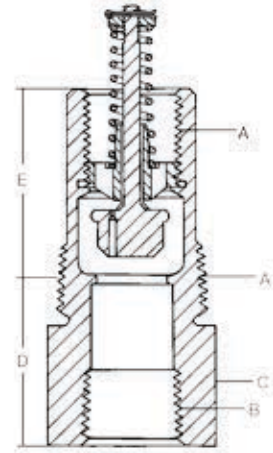


1519C2

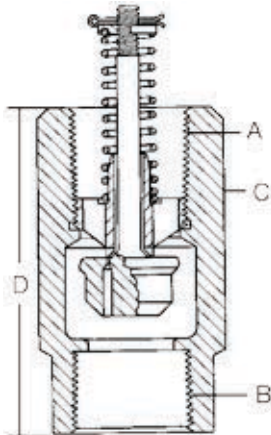

1519A2, 1519A3, 1519A4, 1519B4,
A1519A2, A1519A4, A1519B4

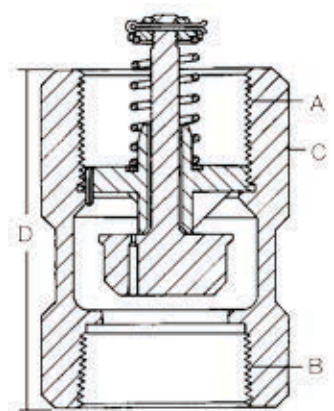

A1519A6

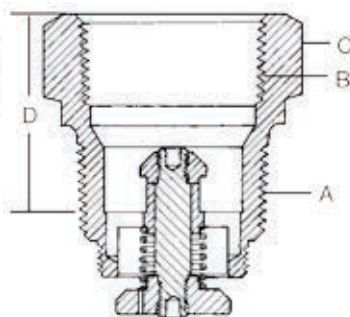


Application



The main feature of a multivalve is the incorporation of several valves (functions) in only one body. The main advantage is cost savings obtained by a simpler tank design with few connections, usage of only one body, which is cheaper than the total cost of independent valves, less need for protective hoods and lower maintenance costs when the Multibonnet is used, depending on the model.

Multivalves incorporate different functions such as: Filler Valve (FV), Service Valve (SV), Vapor Equalizing Valve (VV), Pressure Relief Valve (PR), Fixed Level Gauge (FL), and Gauge Plug (PG). For some models, a Junior Float Gauge opening is also available.


| Rego Part Number | Bonnet | Gauge Plug F.NPT | Connections | | | | | Vapor Closing Flow | Junior Float Gauge Opening | Dip Tube Length Approx (mm) | Pressure Relief Valve | | | Application up to surface area (m2) |
|------------------|--------|------------------|---------------|------------------|----------------|---------------|------------------------------|--------------------|----------------------------|-----------------------------|-----------------------|--------------------------|------|---|
| | | | Tank | Service | Filling | Vapor | Setting | | | | Rego Part Number | Flow Capacity m3/min air | | |
| | | | | | | | | | | | | UL | ASME | |
| G8475RV | Yes | 1/8" | F 2 1/2" | F. POL (CGA 510) | 1 3/4" M.ACME | 1 1/4" M.ACME | 119 m ³ /6,89 bar | YES | 762mm | 17,23 | M313G | 57 | 54 | 7.71 above ground |
| G8475RW | | | | | | | | | | | | | | |
| 8593AR16.0 | Yes | 1/4" | 1 1/2" M. NPT | | 1 3/4" M. ACME | | | NO | 406 mm | - | | | | - |
| 6555R10.6 | Yes | - | 3/4" M NGT | | 1 3/4" M. ACME | - | | | 269 mm | 17,24 | | 22 | 19 | 2.32 |
| 6555R11.6 | | | | | | | | 294 mm | | | | | | |
| 6555R12.6 | | | | | | | | | 304 | | | | | |
| 6532A12.0 | No | | 3/4" M. NGT | | | | | | | | | | | 3.99 |
| 6532R12.0 | Yes | | | | | | | | | | | | | 4.92 |
| 6542A12.0 | No | | 1" M. NGT | | | | | | | | | | | |
| 6542R12.0 | Yes | | | | | | | | | | | | | |
| 7556R12.0 | Yes | 1/8" | 3/4" M.NGT | | | 1 1/4" | 119 m ³ /6,89 bar | | | | | | | Test port isolated from container When service valve is closed |
| 7556RGT12.0 | No | 1/4" | | | | | | | | | | | | |

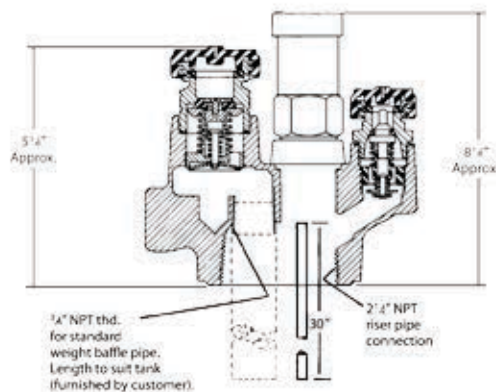


| Rego Part Number | Approximate Filling Rate Liquid Flow, L/min | | | |
|---------------------|---|-----------|-----------|-----------|
| | Pressure Drop Across Valve | | | |
| | 0,689 bar | 1,723 bar | 3,447 bar | 6,894 bar |
| G8475RV | 158 | 272 | 370 | 473 |
| G8475RW | | | | |
| 8593AR16.0 | | | | |
| 6555R10.6 | 30 | 87 | 128 | 158 |
| 6555R11.6 | | | | |
| 6555R12.0 | | | | |
| 6532A12.0/6532R12.0 | 41 | 60 | 87 | 105 |
| 6542A12.0/6542R12.0 | 87 | 121 | 174 | 215 |
| 6533A10.5/6533R10.5 | 41 | 60 | 87 | 105 |
| 6533A11.7/6533R11.7 | | | | |
| 6543A11.1/6543R11.1 | 87 | 121 | 174 | 215 |
| 6543A11.7/6543R11.7 | | | | |

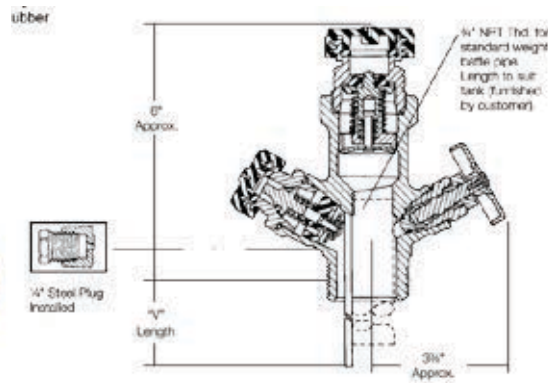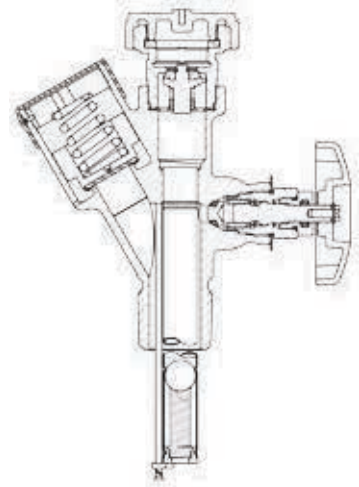

8593AR

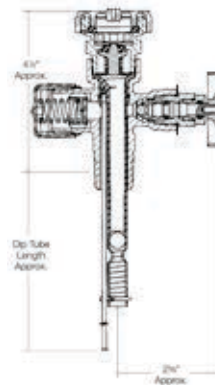

G6555R

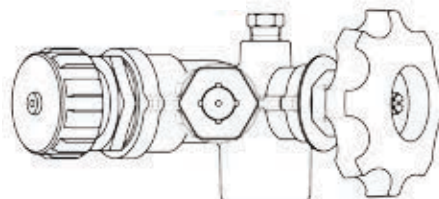

7556R12

Magnetic Level Gauging

Application

The magnetic liquid level gauge operates by the movement of a float lying on the LPG liquid surface that controls, directly or via a gear box system, a magnet inside the tank. The movement of the outside pointer (dial) is made possible by the magnetic coupling through a solid head.

Removal or replacement of dials is possible, assuring quick operations at any time without loss of liquid, pressure, or costly downtime. There are several models of gauges depending on the size of the tank and mounting position as well as different dial sizes for each model.


In some cases, it is possible to connect dials with output signals for remote level information systems. Most typi-

cal applications for LPG tanks are the Junior, Senior or Magnetel series.

Necessary information for ordering a LPG tank level gauge:

- External tank diameter
- Internal tank diameter
- Riser size
- Mounting position (tank drawing required for angle mounting or not cylindrical/horizontal tank and shape of dished for end mounting)
- Define centerline or straddle flanged connections

Mounting positions:

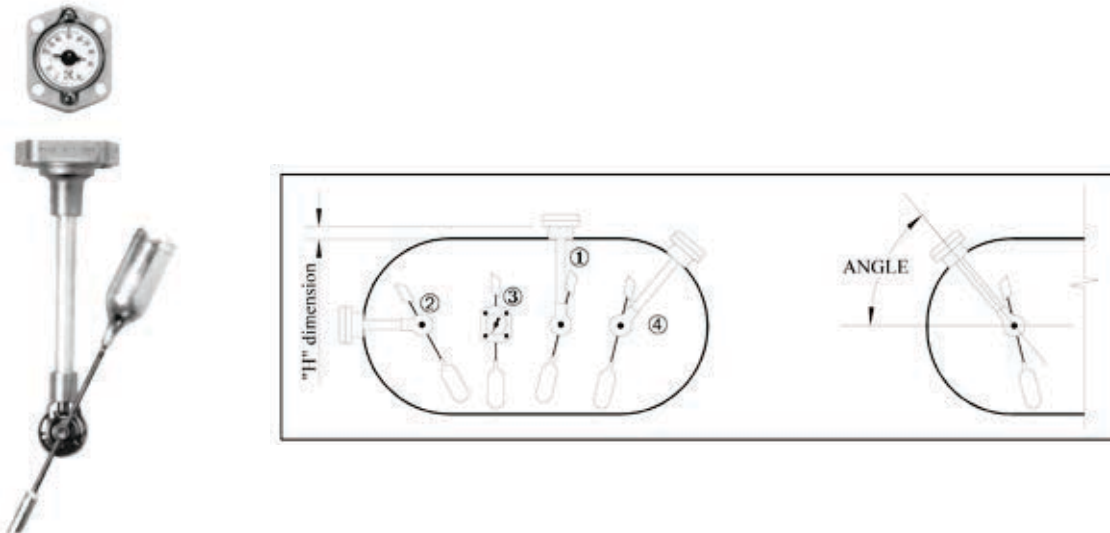

| JUNIOR / SENIOR | | | |
|-----------------|---------------------|---------------------------|---|
| Model | Mounting | Type | Dial / Obs |
| 6260 | TOP | Senior | Side reading |
| 6280 | | | 50mm |
| 6281 | | Junior | 40mm |
| G6281 | | Junior (Senior available) | 40/50mm. Aluminum and Spring steel construction promoting constant calibration and accuracy |
| 6283 | Horizontal or Angle | Senior | 50mm |
| 6284 | | Junior | 40mm |
| 6290 | TOP | Senior | 100mm |
| 6293 | Horizontal or Angle | | 100mm |




Magnetic Level Gauging

| MAGNETEL | | |
|---------------|---------------------|----------------|
| Model | Dial / Obs | Dial Size (mm) |
| 6336-Trim n.º | Top | 100 |
| 6339-Trim n.º | Horizontal or Angle | 200 |
| 6342-Trim n.º | | |
| 6360-Trim n.º | Top | |




| Trim n.º | Head | Support center shaft Float arm | Counter balance | Magnet | Gears | Gasket |
|----------|------|--------------------------------|----------------------|--------|-------|----------------------------------|
| 8 | Al | SS | Cadmium plated steel | AlNiCO | SS | Buna N |
| 11 | SS | | | | | Teflon filled 304SS spiral wound |

| MOUNTING | | |
|--------------------|-------------------|--------------------|
| Head type | Stud size | Bold diameter (mm) |
| SS | ½" – 13UNC or M12 | 89 |
| Al | ½" – 13UNC or M12 | 89 |
| ASA 300Lbs R.F. 3" | M20 | 168 |
| DIN 80 PN25 | M16 | 160 |



Centreline Mount



Shadle Mount

Liquid Withdrawal Valves

Multipurpose Valves

Application

Specially applied when a high capacity of liquid withdrawal from the LPG tank is necessary.

As they integrate an integral excess flow valve, the valve should be completely open while in operation, in order to ensure the correct functioning of the excess flow device.

Depending on the model, some other features may be found in this kind of valve such as filling device or differential back pressure check valve (DBPCV) allowing the return to the tank in case the delivery line pressure becomes 0.70 bar to 1.03 bar higher than the tank pressure.



A8017DP



A8020D

| Rego Part Number | Connections | | Approximate Excess Flow Liquid Close (l/min) | Accessories | |
|------------------|---------------|----------------|--|--------------------------|------------|
| | Inlet (M.NPT) | Outlet (F.NPT) | | Hydrostatic Relief Valve | Vent Valve |
| A8017DH | 1 ¼" | 1" | 185 | Not necessary (DBPCV) | TSS3169 |
| A8017DP | | | 208 | | |
| A8017DLP | | ¾" | 185 | | |
| A8020D | | 1" | 295 | | |

Transfer Angle Valves

Application

Specially applied when a liquid withdrawal from the LPG tank is necessary.

In case an excess flow valve is integrated, it should be installed on a forged steel 300 lb half coupling or in a 1 ¼" x ¾" NPT reducing coupling (female thread must be full length-equivalent to a forged steel 3000 lb half coupling).

If the excess flow valve is not integrated, it should be installed on a Check Lock.



7550P



A7550PX

| Rego Part Number | Connections | | | Approximate Excess Flow Liquid Close (l/min) | CV (l/min Propane @ 1.03bar) | Accessories | |
|------------------|-------------|--------|----------------------|--|------------------------------|--------------------------|------------|
| | Inlet | Outlet | Internal Excess Flow | | | Hydrostatic Relief Valve | Vent Valve |
| 7550P | ¾" | ¾" | No | 50 | : | 3127U | 3165 |
| 7551P | | | Yes | - | | | |
| 7550PX | | ½" | No | 33 | | | |

Combination Valves

Application

These valves are normally installed on bulk LPG tanks combining a pressure gauge and a provision for 1/8" NPT fix level dip tube.

The shut-off valve prevents the gauge from being subject to high constant pressure increasing the working life time.

The valves also incorporate a liquid vent.



A2805C

| Rego Part Number | Connections (NPT) | | |
|------------------|-------------------|----------------|-------------|
| | Container (M) | Gauge Port (F) | Liquid Vent |
| A2805C | 3/4" | 1/4" | Yes |

LPG Bulk Storage Equipment

***Kosan Crisplant is able to offer
LPG bulk storage equipment
and accessories that are
needed for a safe and efficient
operation of the installations
and keep the safety on the
operator's side from
downstream the bulk tank to
the LPG cylinder filling
carousel.***

Range of products:

- Regenerative Turbine Pumps
- Vane Positive Displacement Pumps
- Side Channel Pumps
- Bypass Valves
- Compressors
- Internal Valves
- Globe and Angle valves
- Hydrostatic Relief Valves
- Sight Flow Indicators
- Pull-Away Valves
- Dry Seal Couplings
- Excess Flow Valves - See chapter 2
- Emergency Shut-Off Valves

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

Regenerative Turbine Pumps

Application

Regenerative turbine pumps are normally a good choice for low-capacity and high-head pumping demands, where volatile liquid transfer is involved, as cylinder filling applications, vaporizers feed and autogas.

They are the best solution for low power applications where reliability is more important than energy efficiency, while for higher power applications (more than 10 HP), the improved energy efficiency of vane pumps offsets their shorter service life.

Without the noise, vibration and pulsations of the positive displacement gear and sliding vane pumps, the regenerative turbine pumps handles LPG for long lifetime periods.

The only moving part, the impeller, floats on the shaft with no rubbing, grinding or metal-to-metal contact.

MATERIAL SPECIFICATIONS


| Part | Standard | Optional |
|--------------|-------------------------|---|
| CASE/COVER | Ductile Iron ASTM A-536 | None |
| IMPELLER | Bronze | 303 Stainless Steel Ductile Iron |
| SHAFT | Stressproof Steel | 416 Stainless Steel |
| O-RINGS | Buna N | Teflon* Viton* Neoprene* Etylene-Propylene |
| SEAL SLEEVE | Aluminum | 416 Stainless Steel |
| SEAL SEAT | Cast Iron | 304 Stainless Steel Ni-Resist Ceramic Tungsten Carbide |
| SEAL HOUSING | Steel, Cadmium Plated | 416 Stainless Steel |

* - Registered trad marks of do-port


MECHANICAL SPECIFICATIONS

| | |
|---------------------------|---|
| INLET | 1-1/4" NPT (Models F9, F10) 1-1/2" NPT (Models F12, F13, F14, F15) 11/2" ANSI 300 LB. (Models FF9-FF15) |
| OUTLET | 1" NPT 1" ANSI 300 LB. (FF9-FF15) |
| ROTATION | Clockwise only (From driven end) |
| MAX. RPM | 3600 |
| MAX. CASE TEST PRESSURE | 172 Bar |
| MAX WORKING PRESSURE | 27.6 Bar |
| MAX DIFFERENTIAL PRESSURE | 10.3 Bar |
| HORSEPOWER RANGE | 1/2 to 10 |
| TEMPERATURE RANGE | -32° to +107°C |
| MAX. VISCOSITY | 400 SSU |

Mounting Alternatives

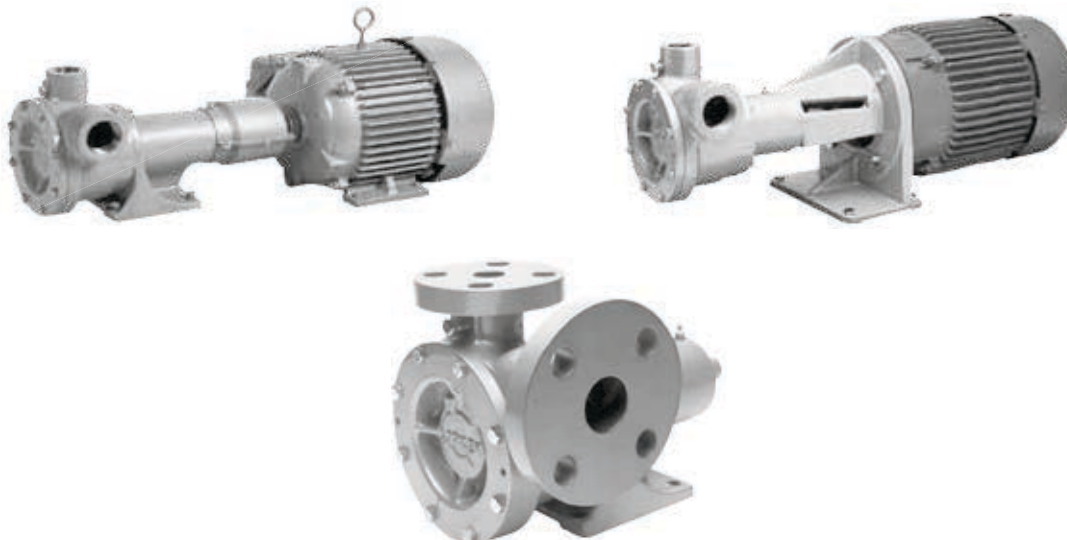

Performance Curves

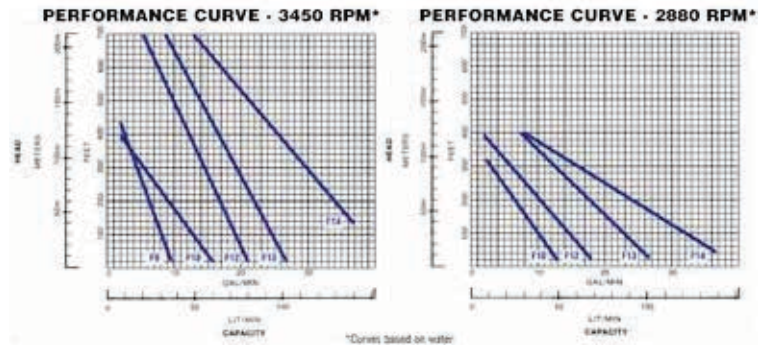

AUTOGAS SERIES SPECIFICATIONS


| | |
|------------------------------|--|
| Specification | All Coro-Flo® 075 and 150 Models |
| Inlet | 1-1/2" - ANSI 300# R.F. Flange (DIN optional) |
| Outlet | 1" - ANSI 300# R.F. Flange (DIN optional) |
| RPM | 3450 @ 60 Hz or 2.880 @ 50 Hz |
| Maximum Work Pressure | 27.6 bar |
| Maximum Diferential Pressure | Model 075 – 10,3 bar Model 150 - 17.2 bar |
| Max/Min Temperature | 107°C/-32°C |
| Impeller Material | Bronze (standard) |
| O-ring material | Buna-N (standard) |
| Seal Materials | Silicon carbide (standard) |
| Maximum driver | 15 KW |
| Type of electric motor* | Rigid Base (Frame mount) and C-face (direct mount) |

Mounting Alternatives




Performance Curves

Performance Curves for 150-Model Coro-Flo® Pumps¹

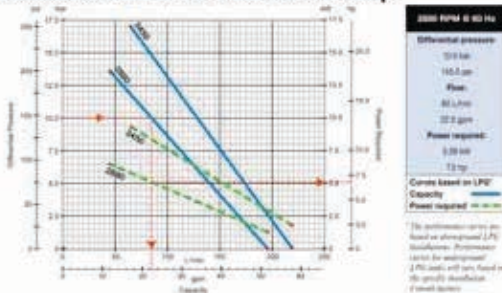

Performance Curves for 075-Model Coro-Flo® Pumps¹

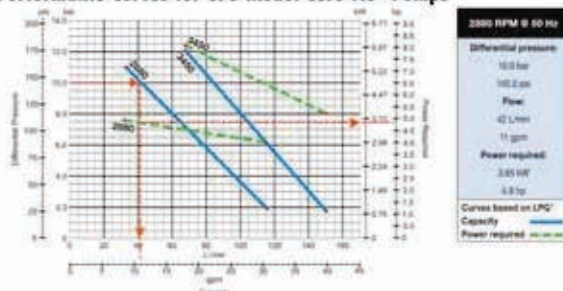

Vane Positive Displacement Pumps

Application

The vane positive displacement pumps are the most popular pumps used on LPG high demand systems combining an interest solution of low cost and easy maintenance and they have a considerable efficiency.


The vanes are self adjusting in order to keep the distance tolerance with the rotor keeping the efficiency for long periods of time and they may be re-

placed very easily.

Typical utilizations for vane positive displacement pumps are loading and unloading of bulk trucks and transport trucks, carousel filling and cylinder filling.

Some pumps have integrated relief valve for relieving the pressure from discharge to the suction side. For specific truck (not stationary) vane positive displacement pumps, consult folder A.

Mounting Possibilities

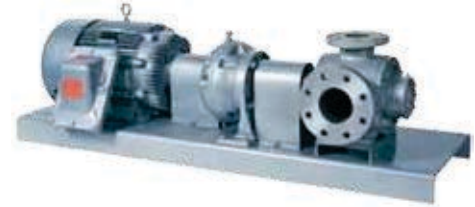

MATERIAL SPECIFICATIONS FOR SERIES 521, 1021 AND F1021

| Part | Model | Standard Material | Optional Material |
|--|-----------|------------------------------|--------------------------|
| Case, head, flange rotor, seat adapter plate | All | Ductile iron ASTM A536 | None |
| Cam, sideplate, bearing cap | All | Gray iron ASTM A48 Class 30 | None |
| Welding flange | All | Steel | None |
| Seal seat | All | Gray iron ASTM S48, Class 30 | 316 SS |
| Seal metal parts | All | Steel | None |
| Shaft | 521, 1021 | "Stressproof" steel | None |
| Vanes | All | Plastic | None |
| Relief valve spring | 521, 1021 | Steel, cadmium plated | None |
| Relief valve | 521, 1021 | Steel | None |
| Bearing | All | Cylinder roller | None |
| O-rings | All | Buna-N | PTFE, Viton®, Neoprene®1 |
| Retainer rings | All | Steel | None |

MATERIAL SPECIFICATIONS FOR SERIES 51


| Part | Model | Standard Material | Optional Material |
|----------------------------------|-------|------------------------------|--|
| Case, head rotor | All | Ductile iron ASTM A536 | None |
| Sideplate | All | Gray iron ASTM A48, Class 30 | None |
| Seal seat | All | Cast iron | Ni-Resist cast iron, displacement type ceramic, and tungsten carbide |
| Seal rotor | All | Carbon | None |
| Seal metal parts | All | Steel | None |
| Vanes | All | Carbon | None |
| Relief valve springs | All | Steel, cadmium plated | None |
| Relief valve | All | Steel | None |
| Shaft | All | 8620 steel | None |
| Mounting bracket | C51 | Gray iron ASTM A48, Class 30 | None |
| Base | F51 | Steel | None |
| O-rings | All | Buna-N | PTFE, Viton®, Neoprene®1 |
| Relief valve adjusting stem seal | All | Buna-N | None |
| Retainer rings | All | Steel | None |
| Bearings | All | Cylindrical roller | None |

| Part | Standard Material | Optional Material |
|--|-----------------------------|--------------------------|
| Case, head, rotor, relief-valve cap, bearing cap | Ductile iron ASTM A536 | None |
| Cam | Gray iron ASTM A48 Class 50 | None |
| Sideplate | Gray iron ASTM A48 Class 30 | None |
| Welding flange | Steel | None |
| Seal seat | Gray iron | 316 SS |
| Seal metal parts | Steel | None |
| Shaft | 8620 steel | None |
| Vanes and vane drivers | Advanced polymers | None |
| Relief valve spring | Stainless steel | None |
| Relief valve | Stainless steel | None |
| Bearing | Steel | None |
| Thrust bearing | Steel | None |
| O-rings | Buna-N | PTFE, Viton®, Neoprene®1 |
| Retainer rings | Steel | |


OPERATING SPECIFICATIONS FOR SERIES 521, 1021, F1021, Z3500 AND Z4500

| | Model | | | | |
|-------------------------------------|----------------|-----------|-----------|---------|------------|
| | 521 | 1021 | F1021 | Z3500 | Z4500 |
| RPM range | 420–950 | 420–950 | 420–950 | 420–800 | 420–800 |
| Temperature range | -32°C to 107°C | | | | |
| Maximum working barg | 28.6 | | | | |
| Maximum differential pressure bar d | 8.6 | | | | |
| Maximum driver size kW | 7.5 | 15 | 15 | 18.6 | 18.6 |
| Flow range L/min | 113.6–321.8 | 246–738.2 | 246–738.2 | 197–746 | 746 –1,446 |

Z4500 Outline Dimensions


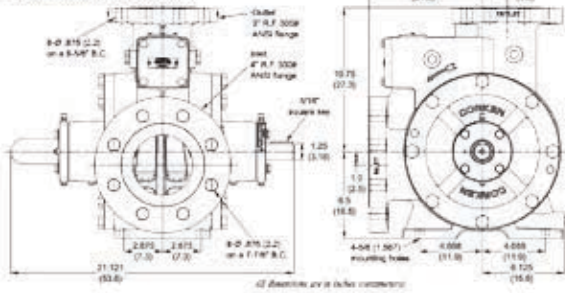


Z3500 Outline Dimensions

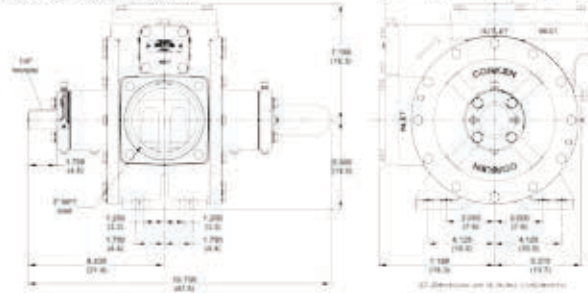

OPERATING SPECIFICATIONS FOR SERIES 51 SERIES

| | | | |
|---------------------------|------------|--------------------------------|------------|
| Minimum RPM: | 1450 | Maximum RPM: | 1750 |
| Minimum temperature: | -32°C | Maximum temperature: | 107°C |
| Maximum working pressure: | 25.2 bar g | Maximum differential pressure: | 8.6 bar d |
| Maximum driver size: | 1.5 kW | Flow range: | 4–23 L/min |

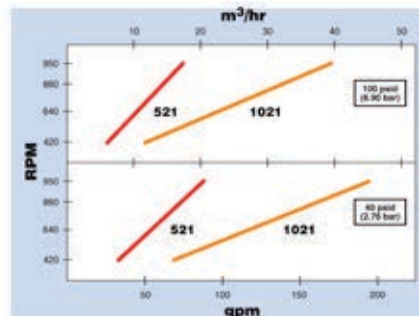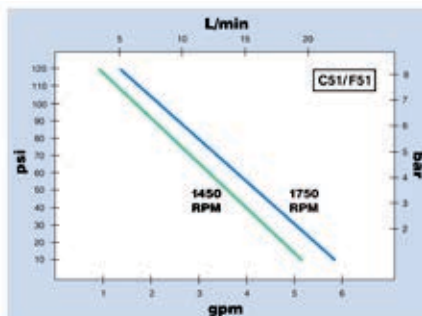

Side Channel Pumps

Application


When there is demand for of LPG on high differential pressure or low NPSH conditions and aerated liquids up to 50% gaseous, as for example on underground tanks, LPG cylinder carousel filling, bulk operations, vaporizers feeding, etc, the side channel multi-stage pumps are the best solution.

As the pumps are able to create very high differential pressure, there are some delivery truck applications that can be used to fill LPG tanks located on high buildings.

Different sizes are available and for each one it is possible to have a different number of stages which gives a wide range of possible solutions matching each installation demand.

MATERIAL SPECIFICATIONS

| Part | Description | GH | RA | A3 | B2 | GP |
|-------|-------------------------------------|--------------------------|-------------------------|-----------------|-----------------|--------------------------|
| 106 | Suction casing | Ductile iron | | Stainless steel | Bronze | Ductile iron |
| 107 | Discharge casing | | | | | Ductile iron |
| 109 | Port plate and diffuser | Cast iron | | | | Cast iron |
| 114 | | | | | | |
| 149 | | | | | | |
| 210 | Shaft | AISI 420 Stainless steel | AISI316 Stainless steel | | Stainless steel | AISI 420 Stainless steel |
| 230 | Impeller | Brass | | | Bronze | Brass |
| 310 | Diffuser bushing | Bronze | Graphite | | Bronze | |
| 310.1 | Element bushing | | | | | |
| 357 | Bearing and mechanical seal housing | Cast iron | | | | |

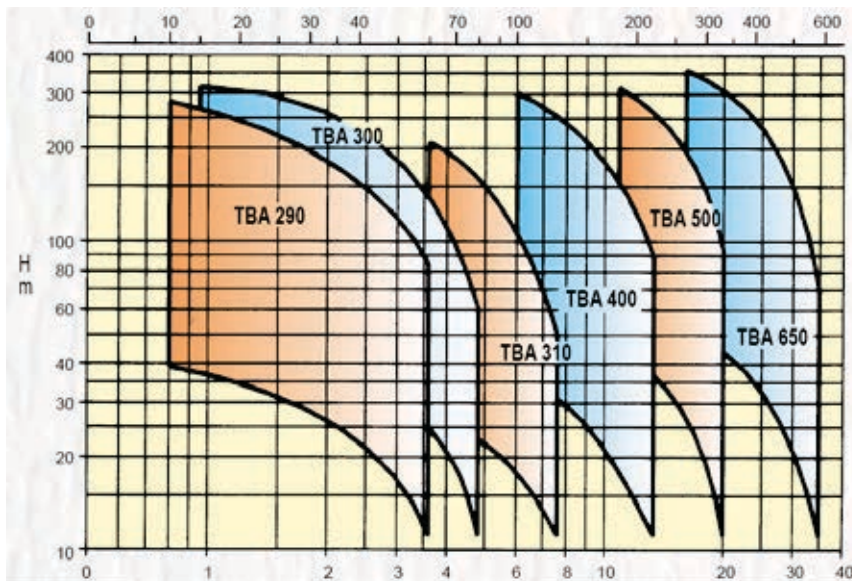

Performance charts for 1450 RPM water capacity

Application

Compressors may be used when high capacity of liquid transfer between tanks, vapor residual recovery and tank/cylinder evacuation for maintenance purpose.

In some situations it may be an advantage to build in both a compressor and a pump in a LPG system in order to establish a better NSPH condition for the pump.

Depending on demand, they may be single or two stage compression.




MATERIAL SPECIFICATIONS

| Specifications | Model | | | | | | |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|
| | 91 | 291 | 491 | 691 | 891 | HG601BB | HG601AA |
| Bore of cylinder (mm) | 76.2 | 76.2 | 101.6 | 114.3 | 113 | 152 | 203 |
| Stroke: (mm) | 63.5 | 63.5 | 76.2 | 101.6 | 101.6 | 76.2 | 76.2 |
| Piston displacement (m3/hr) | | | | | | | |
| minimum @ 400 RPM | 6.8 | 13.6 | 29.2 | 49.6 | 96.2 | 130.5 | 234.5 |
| maximum @ 825 RPM | 14.1 | 28.0 | 60.3 | 102.3 | 192.0 | - | - |
| maximum @ 1,200 RPM | - | - | - | - | - | 391.9 | 703.5 |
| Maximum working pressure: (bar) | 24.1 | 24.1 | 24.1 | 24.1 | 32.1 | 25.2 | 21.7 |
| Maximum brake horsepower (kW) | 5.6 | 11 | 11 | 26.1 | 34 | 55.9 | 55.9 |
| Maximum rod load (kg) | 1,632.9 | 1,632.9 | 1,814.4 | 2,494.8 | 3,175.2 | 3,175.2 | 3,175.2 |
| Maximum outlet temperature (°C) | 177 | | | | | | |
| Bare unit weight (kg) | 52.2 | 72.6 | 117.9 | 283.5 | 387.8 | 375.6 | 393.7 |
| Maximum flow-propane (m3/hr) | 11.4* | 22.9* | 48.8* | 82.0* | 157.6* | 296.4* | 391.8** |
| ANSI/DIN flange option | F91 | F291 | F491 | F691 | - | - | - |

* - Based on 825 RPM or maximum HP, 2.07 bar differential pressure and 37.8°C. Capacity change according with piping, LPG composition and temperature. Detailed compressor analyses may be supply in case of need.


** - Based on 845 RPM

Vapour recovery performance charts

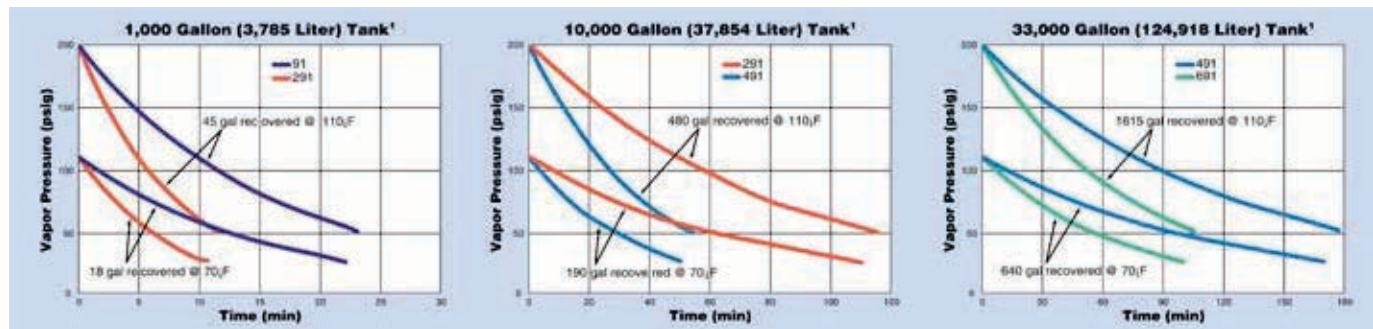

¹PSIG = 0.69 Barg
100°F = 37.78°C

Liquid transfer Propane performance charts

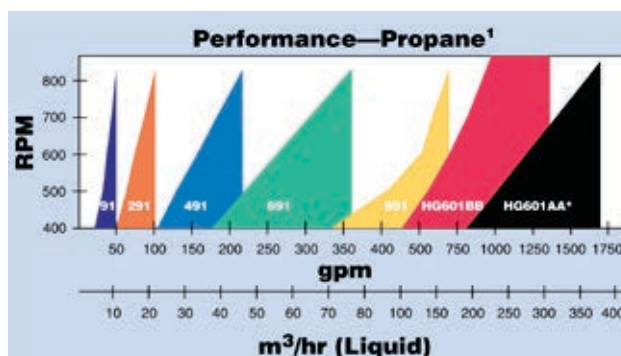

Application

Typically used as isolation valves on the trucks' inlet/outlet connections, hoses or piping. Globe and angle valves construction are positive shut-off valves as the closure of the valve is done by a screwed stem or instant acting system that drives the disk against the seat.

This means that only by rotating the steam wheel or operating the instant acting system is possible to open and close the valve. They can be used in vapor or liquid LPG.

Depending on the valve type, they can be supplied with locking handle (instant acting system) normally used as hose end valves with different extended filling connections.

| Rego Part Number | | Port diameter | Connections | | CV (l/min) @ 0,069bar | | Accessories | |
|------------------|---------|---------------|-------------|--------|-----------------------|-------|--------------------------|------------|
| Globe | Angle | | Inlet | Outlet | Globe | Angle | Hydrostatic relief valve | Vent valve |
| 7704P | 7704LP | | ½" F NPT | | 27 | 46 | SS8001J or SS8001L | TSS3169 |
| 7705P | 7706P | | ¾" F NPT | | 43 | 67 | | |
| A7505AP | A7506AP | ¾" | ¾" F NPT | | 45 | 67 | SS8001U | |
| A7507AP | A7508AP | 1" | 1" F NPT | | 67 | 83 | | |
| A7509BP | A7510BP | 1 ¼" | 1 ¼" F NPT | | 138 | 204 | | |
| A7511AP | A7512AP | 1 ½" | 1 ½" F NPT | | 162 | 210 | | |
| A7511FP | - | | 1 ½" FLANGE | | 174 | - | | |
| A7513AP | A7514AP | 2" | 2" F NPT | | 283 | 335 | | |
| A7513FP | A7514FP | | 2" FLANGE | | 295 | 503 | | |
| A7517AP | A7518AP | 3 1/8" | 3" F NPT | | 745 | 1147 | | |
| A7518AP | A7518FP | | 3" FLANGE | | | | | |

To obtain flow rate for others pressure drop values then 0,069bar, multiply CV by square root of (14,5x P).

Application

Specially designed to protect piping and shut off valves from pressure increase as consequence of liquid vaporization.

They should be installed on the piping between shut off valves or in the body of the valve.

External hydrostatic relief valves incorporate the Pop-Action design which permits a small opening when there is a moderate pressure increase and a fully "pop" opening when there is a pressure increase beyond a predetermined point.



EXTERNAL HYDROSTATIC RELIEF VALVES

| Rego Part Number | Start to Discharge Setting Barg | Body Material | Container connection A (M. NPT) | Approximate dimensions (mm) | | Accessories | | |
|------------------|---------------------------------|-----------------|---------------------------------|-----------------------------|-----------------|----------------|--------------------|----------------|
| | | | | B | C (Wrench) | Protective Cap | Pipeaway | |
| | | | | | | | Adapter or threads | |
| SS8001G | 17.24 | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002G | | | 1/2" | | | | 22 | - |
| SS8021G | | | 1/4" | 35 | 17 | | 1/4" NPSM Thrds | |
| SS8022G | | | 1/2" | | | | 22 | 3/8" NPT Thrds |
| 3127G | 18.96 | Brass | 1/4" | 50 | 28 | 7545-40 | - | |
| 3129G | | | 1/2" | 65 | 28 | | 3129-10* | |
| 3127H | | | 1/4" | 50 | 22 | | - | |
| 3129H | | | 1/2" | 65 | 28 | | 3129-10* | |
| 3127P | 20.68 | Brass | 1/4" | 50 | 28 | - | - | |
| 3129P | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8022P | | | 3/8" | 22 | - | | 3/8" NPT Thrds | |
| 3127J | 24.13 | Brass | 1/4" | 50 | 22 | 7545-40 | - | |
| 3129J | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8001J | | Stainless Steel | 1/4" | 22 | 17 | | - | - |
| SS8002J | | | 1/2" | | | | | 22 |
| SS8021J | 1/4" | 35 | 17 | 1/4" NPSM Thrds | | | | |
| SS8022J | 1/2" | | | 22 | 3/8" NPT Thrds | | | |
| 3127K | 25.85 | Brass | 1/4" | 50 | 28 | 7545-40 | - | |
| 3129K | | | 1/2" | 65 | 28 | | 3129-10* | |
| 3125L | 27.58 | Brass | 1/4" | 40 | 16 | Included | - | |
| 3127L | | | 50 | 22 | 7545-40 | - | | |
| 3129L | | | 1/2" | 65 | 28 | 3129-40P | 3129-10* | |
| SS8001L | - | Stainless Steel | 1/4" | 22 | 17 | - | - | |
| SS8002L | | | 1/2" | | | | 22 | - |
| SS8021L | | 1/4" | 35 | 17 | 1/4" NPSM Thrds | | | |
| SS8022L | | 1/2" | | | 22 | | 3/8" NPT Thrds | |
| 3127U | 31.03 | Brass | 1/4" | 50 | 28 | 7545-40 | - | |
| 3129U | | | 1/2" | 65 | 28 | | 3129-10* | |
| SS8001U | | Stainless Steel | 1/4" | 22 | 17 | | - | - |
| SS8002U | | | 1/2" | | | | | 22 |
| SS8021U | 1/4" | 25 | 17 | 1/4" NPSM Thrds | | | | |
| SS8022U | 1/2" | | | 22 | 3/8" NPT Thrds | | | |

* - 1/2" F. NPT outlet connections



3125 Series (.161 Orifice)
3127 Series (.274 Orifice)
3129 Series (.386)

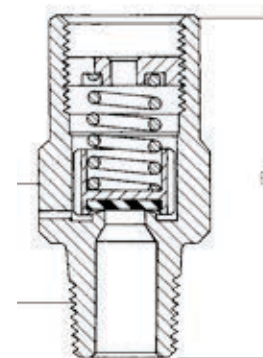

Sight Flow Indicators

Application


Installing a sight flow indicator allows the operator of the plant (or truck) to clearly understand and observe the conditions of the flow by a two side glass window.

By installing it upstream the pump, it is possible to adjust the pump speed to the maximum before cavitation occurs.

If it is installed downstream the pump, it is possible to observe the pump flow conditions.

Additionally, it incorporates a back check valve to prevent back flow. Another typical application is on compressor liquid lines as it gives the operator the possibility to see when liquid stops flowing and change of vapour recovery operation should take place which minimizes loss of operation time.

| Rego Part Number | A (Inlet / Outlet) F.NPT | B (Lenght) mm |
|------------------|--------------------------|---------------|
| A7794 | 2" | 146 |
| A7796 | 3" | 187 |

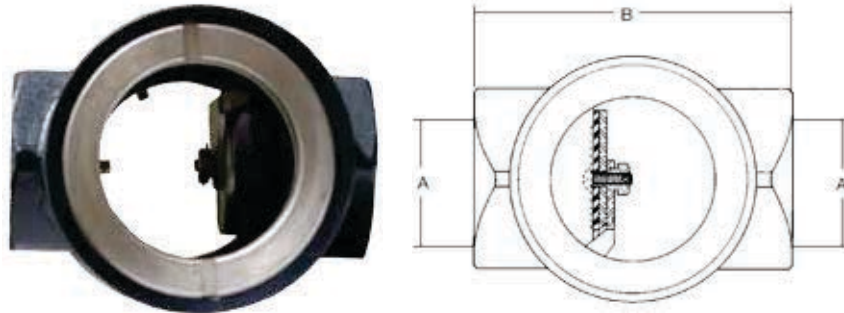

A7794

Simple flow indicators that show to the operator the flow direction inside the piping are also available but without any visual flow conditions inspection and back check valve. A "T" on the piping is necessary for installation.

| PART NUMBER | DESCRIPTION | NOTE |
|-------------|------------------------------------|----------------------------------|
| 6286-00325 | 4" dial, 2" adapter and A = 82 mm | Other A dimensions under request |
| 6286-00475 | 4" dial, 2" adapter and A = 120 mm | |



Pull-Away Valves

Application

Specially developed to provide pull-away protection for LPG transfer operations.

When properly installed, the valve is designed to stop escape flow in both directions in an event of pull away with minimal loss of product. In case of pull away, before the hose tensile rupture, two bodies should separate closing two back pressure valves.

The two parts may be coupled again but the LPG must be safely removed from both hose sides before this is done.

A leakage test should be done after re-assembly. It is very important to lubricate the pieces every six months and carry out regular operational tests with inert gases.


| Part Number | Inlet / Outlet (F.NPT) | Disconnect Force - kgf (Aprox.) | Reconnect Force - kgf (Aprox.) | Lenght (mm) | LPG capacity (l/min) | | | |
|-------------|------------------------|---------------------------------|--------------------------------|-------------|----------------------|----------|----------|----------|
| | | | | | 0,34 Bar | 0,69 Bar | 1,72 Bar | 3,44 Bar |
| A2141A6 | 3/4" | 59 | 36 | 98 | 41 | 60 | 94 | 136 |
| A2141A6L | | 59 | 36 | | 41 | 60 | 94 | 136 |
| A2141A8 | 1" | 34 | 22 | 116 | 79 | 113 | 177 | 253 |
| A2141A8L | | 34 | 22 | | 79 | 113 | 177 | 253 |
| A2141A10 | 1 1/4" | 72 | 11 | 143 | 196 | 283 | 454 | 643 |
| A2141A16 | 2" | 136 | 22 | 363 | 196 | 1324 | 2081 | 2838 |




A2141A10




A2141A6

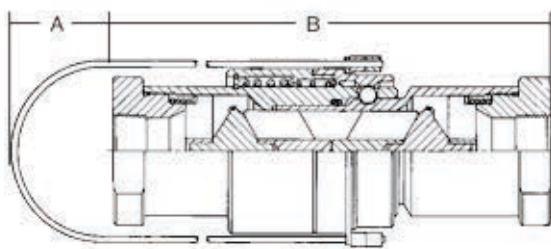


A2141A16

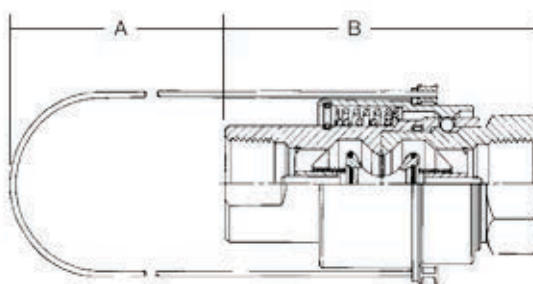

A2141A10

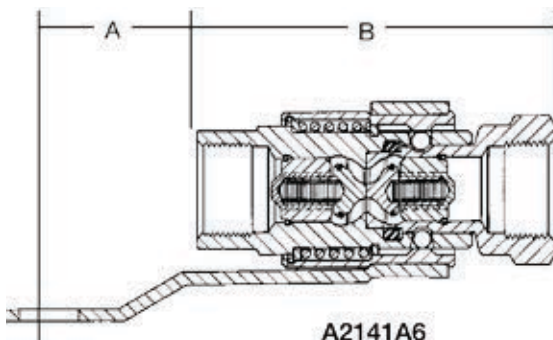

A2141A6
A2141A8

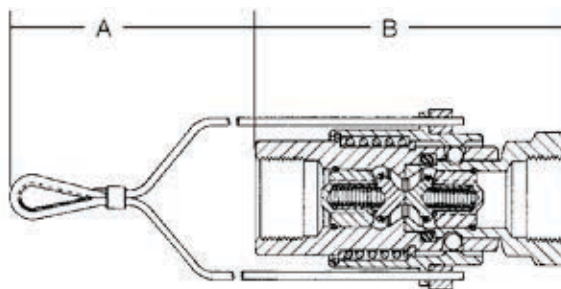

A2141A6L
A2141A8L

Dry Seal Couplings

Application

Dry gas coupling promotes a safe and quick connection and disconnection of hoses and loading arms to tank trucks, rail tankers and tank containers.

During connection and after disconnection there will be no spillage.

This increases the safety of loading processes with dangerous goods. The robust design, easy servicing and high level of security ensure safe and frequent use on a long term basis.

This protects the environment and the loading material, reduces the risk of accidents and saves money. A modular design with a lot of optional features makes it possible to find individual solutions for your special application.

The local regulation should be taken into consideration before installation. The bellow products comply with the European Directives PED and ATEX and the international requirements ADR, RID, IMDG and TDT.


How does it works

When connecting the dry gas coupling, the hose unit will slide easily over the tank unit. The three rollers engage in the three slots. To allow the hose unit to lock, rotate the hose unit clockwise approximately 100° by gently pushing towards the tank unit. To stop the flow and unlock the units, reverse the procedure.



Tank unit with female thread 1" (socket Ø56) With sealing material FPM and NBR90

| | | | | Manntek Part Number | |
|------------|--------|------------|--------|---------------------|------------|
| Thread | Length | Head width | Weigth | FPN | NBR90 |
| 3/4 BSP | 68,5 | 50 | 0,7 | L101A4401A | L101A4420A |
| 3/4 NPT | 74 | 50 | 0,8 | L102A4401 | L102A4420 |
| 1" BSP | 70,5 | 50 | 0,7 | L103A4401A | L103A4420A |
| 1" NPT | 77 | 50 | 0,8 | L104A4401 | L104A4420 |
| 1 1/4" | 70,5 | 50 | 0,7 | L105A4401A | L105A4420A |
| 1 1/4" NPT | 77,5 | 50 | 0,8 | L106A4401 | L106A4420 |

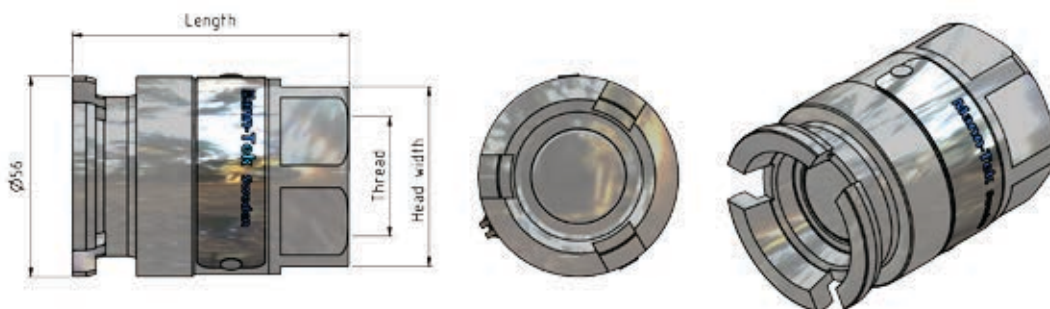

Tank unit with flange 1" (socket Ø56)

| Dimensions | | | | Manntek Part Number | |
|------------------|--------|-----------|-----------|---------------------|---------------|
| Connection | Length | Thickness | Weight Kg | Sealing FPM | Sealing NBR90 |
| ¾" ASA 300 PSI | 70,5 | 15,9 | 1,3 | L150A4401 | L150A4420 |
| DN25 PN25/40 | 73 | 18 | 1,4 | L124A4401 | L124A4420 |
| 1" ASA 300 PSI | 72 | 17,5 | 1,5 | L152A4401 | L152A4420 |
| DN32 PN25/40 | 73 | 18 | 1,5 | L126A4401 | L126A4420 |
| 1 ¼" ASA 300 PSI | 74 | 19 | 1,5 | L154A4401 | L154A4420 |




Tank with female thread 2" (Socket Ø71)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head width | Weight Kg | Sealing FPM | Sealing NBR90 |
| 1 1/2" BSP | 99 | 65 | 1,5 | L207A4401A | L207A4420A |
| 1 1/2" NPT | 102 | 65 | 1,6 | L208A4401 | L208A4420 |
| 2" BSP | 101 | 65 | 1,2 | L210A4401A | L210A4420A |
| 2" NPT | 102,5 | 65 | 1,3 | L211A4401 | L211A4420 |




Tank unit with flange 2" (socket Ø71)

| Dimensions | | | | Manntek Part Number | |
|-------------------|--------|-----------|--------|---------------------|---------------|
| Connection | Length | Thickness | Weight | Sealing FPM | Sealing NBR90 |
| DN40 PN25/40 | 86,5 | 18 | 2,8 | L228A4401 | L228A4420 |
| 1 1/2" AS 300 PSI | 88,5 | 20 | 3,2 | L256A4401 | L256A4420 |
| DN50 PN25/40 | 88,5 | 20 | 3,5 | L231A4401 | L231A4420 |
| 2" AS 300 PSI | 88,5 | 20 | 3,5 | L258A4401 | L258A4420 |

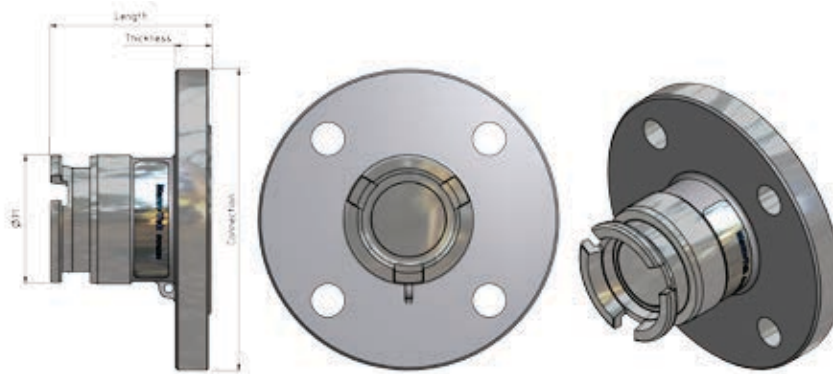

Tank unit with female thread 3" (socket Ø119)


| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head width | Weight Kg | Sealing FPM | Sealing NBR90 |
| 3" BSP | 134 | 100 | 3,0 | L414B4401A | L414B4420A |
| 3" NPT | 144 | 100 | 3,00 | L415B4401 | L415B4420 |

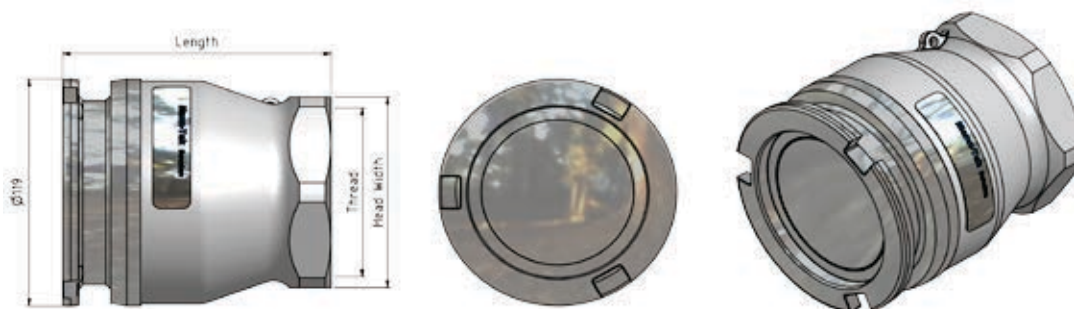

Tank unit with flange 3" (socket Ø119)


| Dimensions | | | | Manntek Part Number | |
|--------------------|--------|-----------|-----------|---------------------|---------------|
| Connection | Length | Thickness | Weight Kg | Sealing FPM | Sealing NBR90 |
| DN65 PN25/40 | 112 | 15 (22)* | 5,0 | L434B4401 | L434B4420 |
| 2 1/2" ASA 300 PSI | 112 | 15 (24)* | 5,0 | L460B4401 | L460B4420 |
| DN80 PN25/40 | 112 | 15 (24)* | 5,5 | L437B4401 | L437B4420 |
| 3" ASA 300 PSI | 112 | 15 (24)* | 5,5 | L462B4401 | L462B4420 |

* - Values in bracket also available on special request

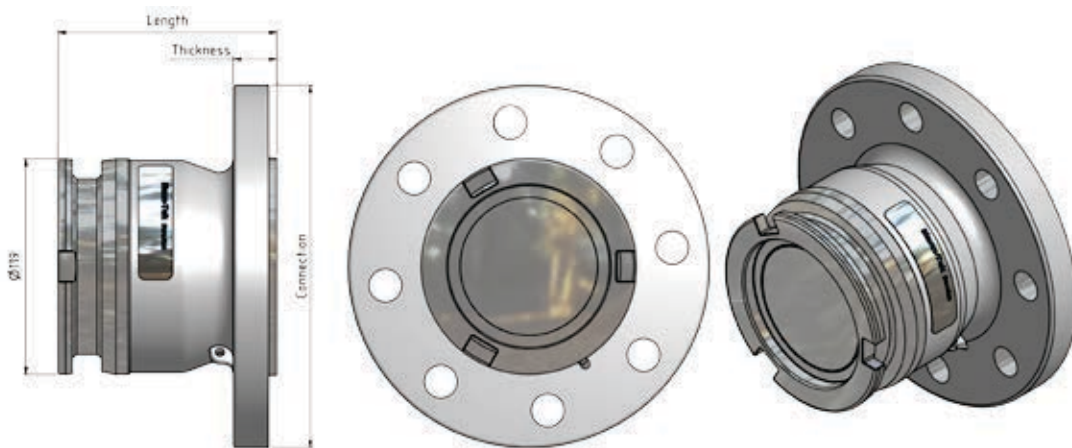

Tank unit female thread 4" (socket Ø164)


| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head width | Weight Kg | Sealing FPM | Sealing NBR90 |
| 4" BSP | 156 | 125 | 6,1 | L516B4401A | L516B4420A |
| 4" NPT | 166 | 125 | 6,3 | L517B4401 | L517B4420 |

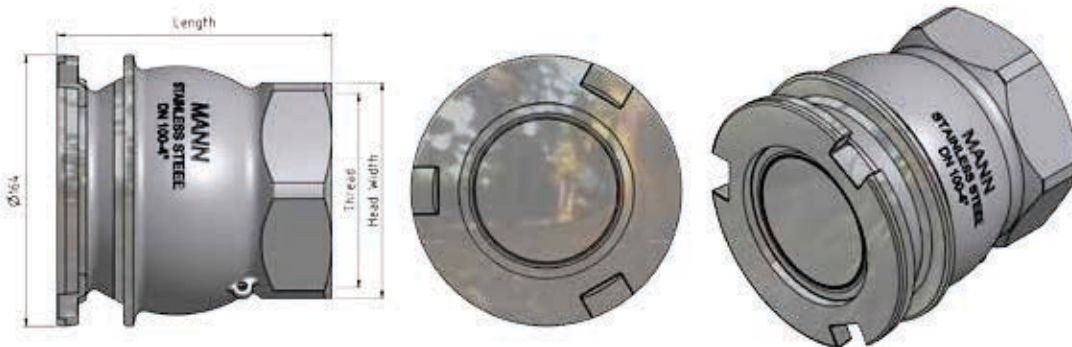

Tank unit with flange 4" (socket Ø164)


| Dimensions | | | | Manntek Part Number | |
|----------------|--------|-----------|--------|---------------------|---------------|
| Connection | Length | Thickness | Weight | Sealing FPM | Sealing NBR90 |
| DN100 PN25/40 | 134 | 16 (24)* | 9,3 | L540B4401 | L540B4420 |
| 4" ASA 300 PSI | 134 | 16 (24)* | 9,3 | L564B4401 | L564B4420 |

* - Values in bracket also available on special request

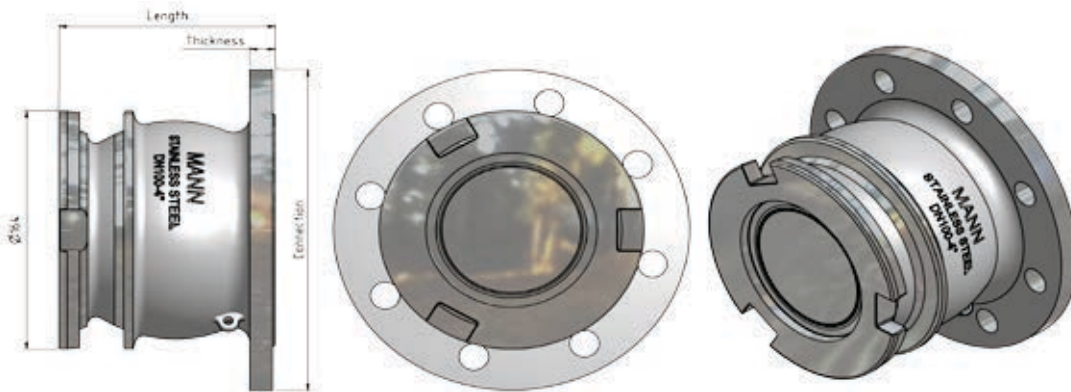


Hose unit with female thread 1" (socket Ø56)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head Width | Weight KG | Sealing FPM | Sealing NBR90 |
| 3/4 BSD | 131 | 50 | 1,9 | M101A4401A | M101A4420A |
| 3/4 NPT | 134,5 | 50 | 2,0 | M102A4401 | M102A4420 |
| 1" BSP | 133 | 50 | 1,9 | M103A4401A | M103A4420A |
| 1" NPT | 136,5 | 50 | 2,0 | M104A4401 | M104A4420 |
| 1 1/4" BSP | 139,5 | 50 | 1,9 | M105A4401A | M105A4420A |
| 1 1/4" NPT | 144 | 50 | 2,0 | M106A4401 | M106A4420 |

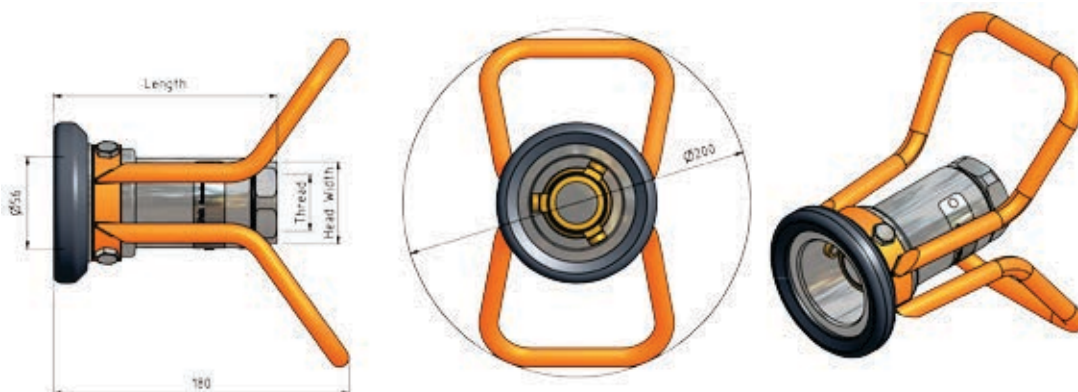


Hose unit with flange 1" (socket Ø56)

| Dimensions | | | | Manntek Part Number | |
|------------------|--------|-----------|-----------|---------------------|-------------|
| Connection | Length | Thickness | Weight Kg | Sealing FPM | Sealing NBR |
| ¾" ASA 300 PSI | 166,5 | 15,9 | 3,2 | M150A4401 | M150A4420 |
| DN25 PN25/40 | 168,5 | 18 | 3,4 | M124A4401 | M124A4420 |
| 1" ASA 300 PSI | 168 | 17,5 | 3,4 | M152A4401 | M152A4420 |
| DN32 PN25/40 | 168,5 | 18 | 3,6 | M126A4401 | M126A4420 |
| 1 ¼" ASA 300 PSI | 169,5 | 19 | 3,6 | M154A4401 | M154A4420 |

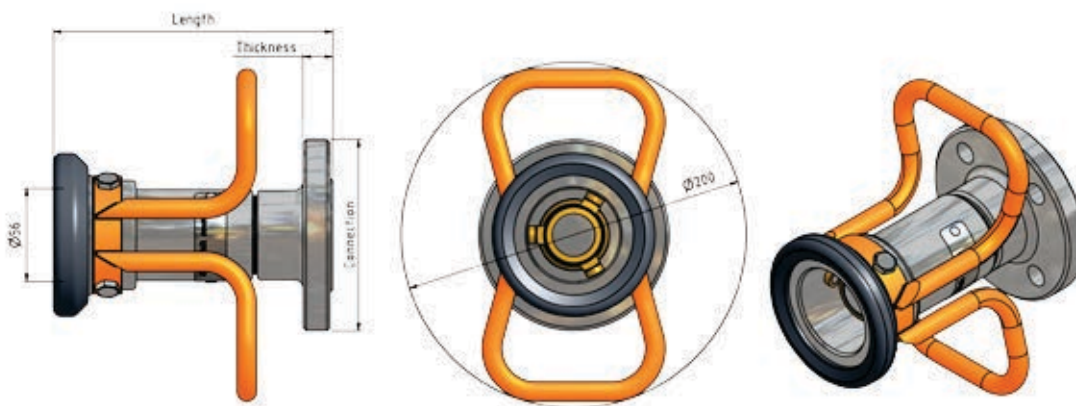


Hose unit with female thread 2" (socket Ø71)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head width | Weight Kg | Sealing FPM | Sealing NBR90 |
| 1 ½" BSP | 152,5 | 65 | 3,1 | M207A4401A | M207A4420A |
| 1 ½" NPT | 155,5 | 65 | 3,2 | M208A4401 | M208A4420 |
| 2" BSP | 154,5 | 65 | 2,9 | M210A4401A | M210A4420A |
| 2" NPT | 156 | 65 | 3 | M211A4401 | M211A4420 |

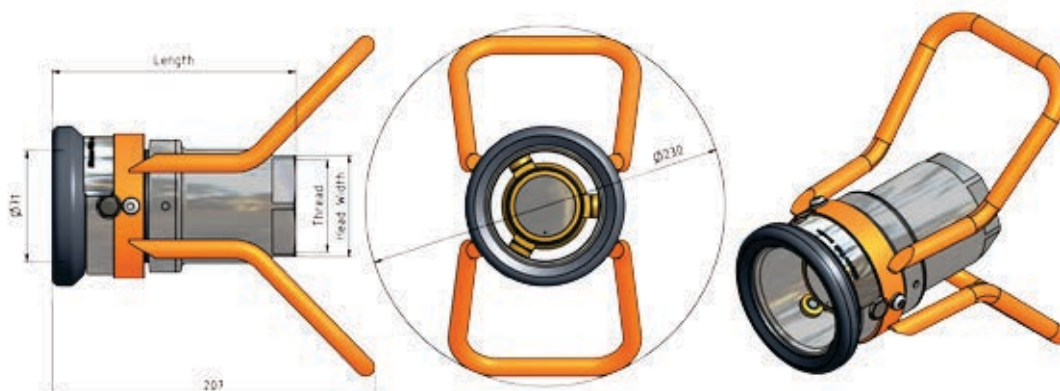


Hose unit with flange 2" (socket Ø71)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|-----------|---------------------|---------------|
| Thread | Length | Head width | Weight Kg | Sealing FPM | Sealing NBR90 |
| 1 ½" BSP | 152,5 | 65 | 3,1 | M207A4401A | M207A4420A |
| 1 ½" NPT | 155,5 | 65 | 3,2 | M208A4401 | M208A4420 |
| 2" BSP | 154,5 | 65 | 2,9 | M210A4401A | M210A4420A |
| 2" NPT | 156 | 65 | 3 | M211A4401 | M211A4420 |

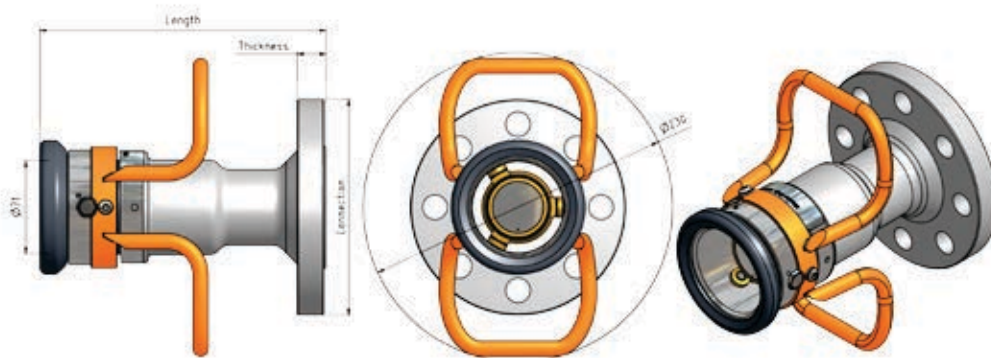


Hose unit with female thread 3" (socket Ø119)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|--------|---------------------|---------------|
| Thread | Length | Head width | Weight | Sealing FPM | Sealing NBR90 |
| 2 ½" BSP | 192 | 100 | 8,8 | M412B4401A | M412B4420A |
| 2 ½" NPT | 200 | 100 | 9,1 | M413B4401 | M413B4420 |
| 3" BSP | 194 | 100 | 8,1 | M414B4401A | M414B4420A |
| 3" NPT | 202 | 100 | 8,4 | M415B4401 | M415B4420 |

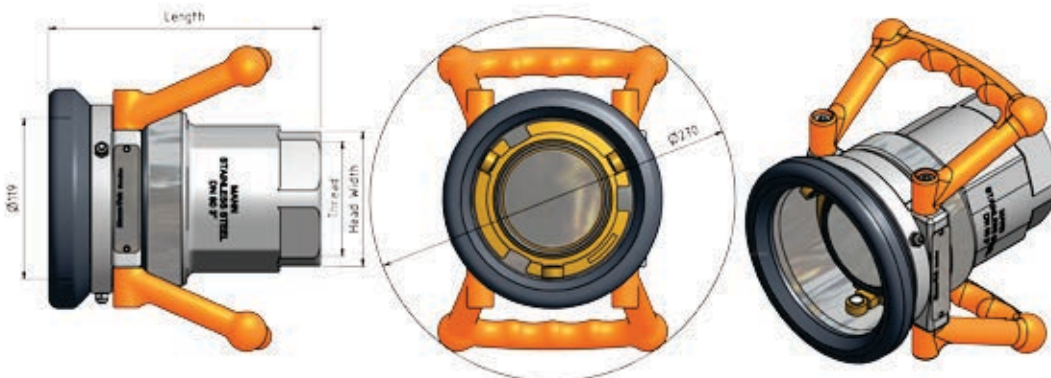


Hose unit with flange 3" (socket Ø119)

| Dimensions | | | | Manntek Part Number | |
|------------------|--------|-----------|-----------|---------------------|---------------|
| Connection | Length | Thickness | Weight Kg | Sealing FPM | Sealing NBR90 |
| DN65 PN25/40 | 260,5 | 22 | 12,6 | M434B4401 | M434B4420 |
| 2 ½" ASA 300 PSI | 264 | 25,4 | 13,3 | M460B4401 | M460B4420 |
| DN80 PN25/40 | 267 | 24 | 13,2 | M437B4401 | M437B4420 |
| 3" ASA 300 PSI | 262,5 | 28,6 | 15,1 | M462B4401 | M462B4420 |

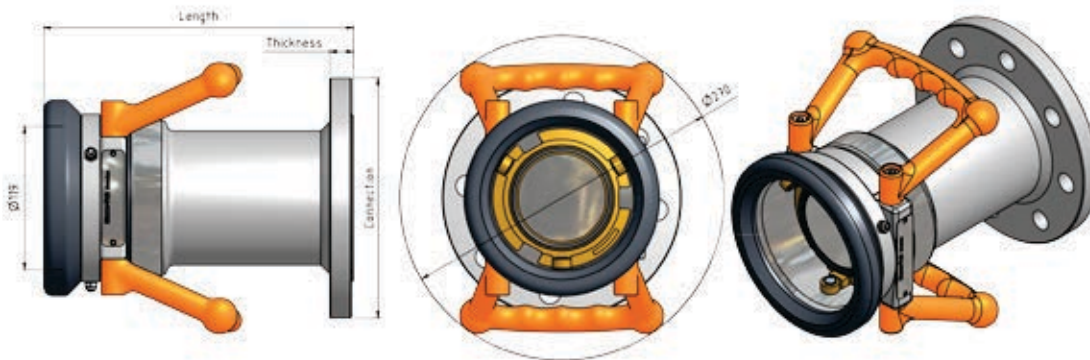


Hose unit with female thread 4" (socket Ø164)

| Dimensions | | | | Manntek Part Number | |
|------------|--------|------------|--------|---------------------|---------------|
| Thread | Length | Head width | Weight | Sealing FPM | Sealing NBR90 |
| 4" BSP | 223 | 130 | 15,7 | M516B4401A | M516B4420A |
| 4" NPT | 232 | 130 | 16,0 | M517B4401 | M517B4420 |

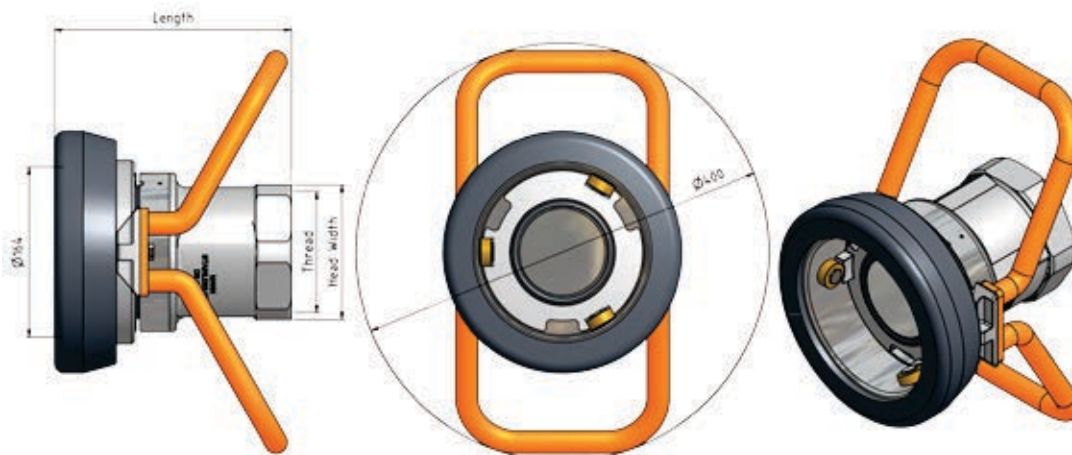

Hose unit with flange 4" (socket Ø164)

| Dimensions | | | | Manstek Part Number | |
|----------------|--------|-----------|--------|---------------------|---------------|
| Connection | Length | Thickness | Weight | Sealing FPM | Sealing NBR90 |
| DN100 PN25/40 | 233 | 24 | 20,8 | M540B4401M | M540B4420M |
| 4" ASA 300 PSI | 241 | 31,7 | 24,3 | M564B4401M | M564B4420M |

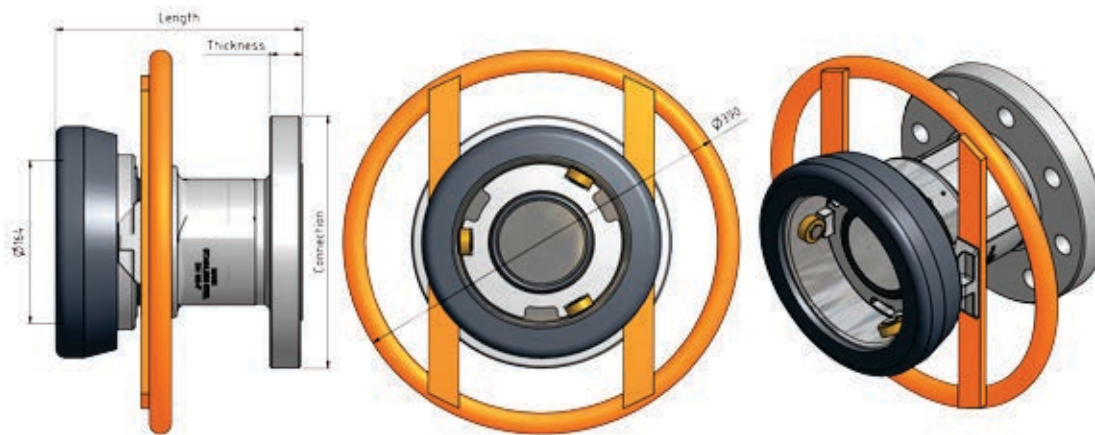

Application

Normally installed as safety devices on bulk plants for bobtail or transport filling operations in liquid or vapour phase.

The main feature of this kind of valve is the ability to be actuated in different ways: locally and manually by the driver, manual remote or pneumatic remote system by plant operators and automatically by cable connected to the hose in case of pull away.

Additionally, they incorporate a thermal fuse which in case of temperatures higher than 100°C will melt making the valve turn to close position.

Emergency shut-off valves may be used as operation valves and replace globe or angle valves and they clearly indicate whether they are in open or closed position.

| Rego Part Number | Inlet & Outlet Connections | Accessories | | Liquid Flow Capacity at 0,68 bar drop (l/min) |
|------------------|----------------------------|------------------------|-----------------------------|---|
| | | Remote Pneumatic Close | Remote Pneumatic Open/Close | |
| 6016 | 2" F-NPT | - | - | 2691 |
| 6024 | 3" F-NPT | - | - | 5015 |
| 6010 | 1¼" F. NPT | 6016-60D | 6016-60C | 980 |



6016



6024

Instrumentation and Telemetry

Kosan Crisplant offers a wide range of different types of manometers for LPG installations or industry in general. Furthermore, Kosan Crisplant can also offer reliable telemetry equipment from the simplest to the most innovative solution.

Range of products:

- ABS series
- SSC series
- ASS series
- Telemetry solutions

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

ABS Series

Application

ABS series manometers have the external case in Plastic.

This type of manometer represents the simplest construction available and it may be used when accuracy is not so important.

Normally they are installed on liquid or gas networks with fluids that do not attack chemically the alloys of copper, do not present a high stickiness and do not crystallize.

Normally they are installed on liquid or gas networks with fluids which do not attack the alloys of copper chemically nor present a high stickiness and which do not crystallize either.



SSC Series

Application

Stainless Steel Case series manometers have the external case in stainless steel.

This type of manometer is resistant to external environment.

The accuracy is 1.6% and they can be filled with glycerin in order to protect the internal mechanism against vibrations

It may be installed on liquid or gas networks with fluids which do not attack the alloys of copper chemically nor present a high stickiness and which do not crystallize either.

-Typical utilization is to check differential pressures on pumps, compressors, etc.



Application

All in Stainless Steel series manometers have the external case and all other parts in stainless steel. This type of manometer is resistant to external environment and to corrosive fluids thus preventing oxidation of all parts.

The accuracy is 1% and they can be filled with glycerin in order to protect the internal mechanism against vibrations.

Typical utilization is to check differential pressures on pumps, compressors, as well as to measure the presence of very corrosive atmosphere or fluids.



APPROXIMATE DIMENSIONS (mm) and WEIGHTS (Kg)

| ABS | DN DIAL SIZE | D | D1 | Ø | A | CH | E | E1 | F | G | H | Ø Panel drilling | With electric contacts Amax | Weight Kg (2) |
|-----|--------------|-----|-----|---|----|----|------|----|------|----|----|------------------|-----------------------------|---------------|
| ABS | 40 | - | 42 | - | 25 | 11 | 27,5 | - | 1/8" | - | - | - | - | - |
| | 50 | - | 50 | - | 28 | 14 | 48 | - | 1/4 | - | - | - | - | - |
| | 63 | - | 63 | - | 28 | 14 | 51 | - | 1/4 | - | - | - | - | - |
| SSC | 63 | 62 | 68 | 4 | 29 | 14 | 57 | 57 | 1/4" | 10 | - | 66 | - | 0,15 - 0,20 |
| | 80 | 79 | 88 | 5 | 40 | 14 | 62 | 65 | 1/4" | 10 | 20 | 83 | - | 0,25 - 0,45 |
| | 100 | 101 | 114 | 5 | 54 | 22 | 86 | 90 | 1/2" | 18 | 32 | 105 | 83 | 0,75 - 1,0 |
| | 150 | 149 | 162 | 6 | 54 | 22 | 110 | 90 | 1/2" | 18 | 32 | 153 | 83 | 1,10 - 1,75 |
| ASS | 63 | 62 | 70 | 4 | 34 | 14 | 54 | 59 | 1/4" | 10 | 18 | 65 | - | 0,2 - 0,3 |
| | 80 | 79 | 88 | 5 | 40 | 14 | 62 | 65 | 1/4" | 10 | 20 | 83 | - | 0,3 - 0,5 |
| | 100 | 101 | 114 | 5 | 54 | 22 | 86 | 89 | 1/2" | 18 | 32 | 105 | 83 | 0,8 - 1,1 |
| | 150 | 149 | 162 | 6 | 54 | 22 | 110 | 89 | 1/2" | 18 | 50 | 153 | 83 | 1,2 - 1,8 |
| | 200 | 189 | 208 | 6 | 55 | 22 | 135 | 95 | 1/2" | 16 | 50 | 194 | - | 1,5 |

(2)Variable depending of liquid filling

OPTIONS AND ACCESSORIES

SPECIAL SCALES: Single - Double (bar / psi - bar / Kpa) SPECIAL CONNECTIONS

MAX / MIN / MIN & MAX DRAGGING POINTERS (DS 100 - 150)

SAFETY GLASS

SILICONE OIL FILLING (Tamb. -30 80 C)

SILVER SOLDERING for range ≤40 bar (Process Temp. 120 C for

SSC series)

DEGREASING FOR OXYGEN

DIRECT OR REMOTE DIAPHRAGM SEALS



ELECTRIC OR INDUCTIVE CONTACTS (For DN 100 - 150)

DEGREE OF PROTECTION

IP55 or IP65 (liquid filled) according to EN 60529

LIQUID FILLED

Glycerol 90%

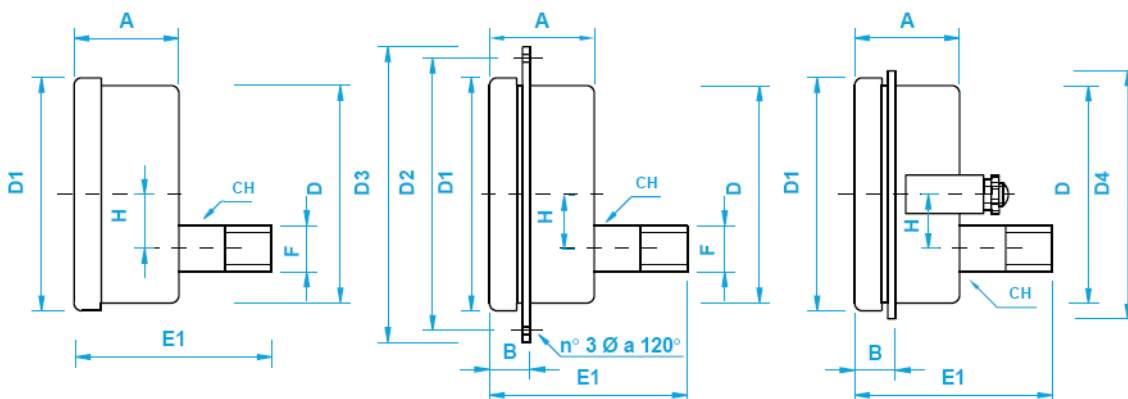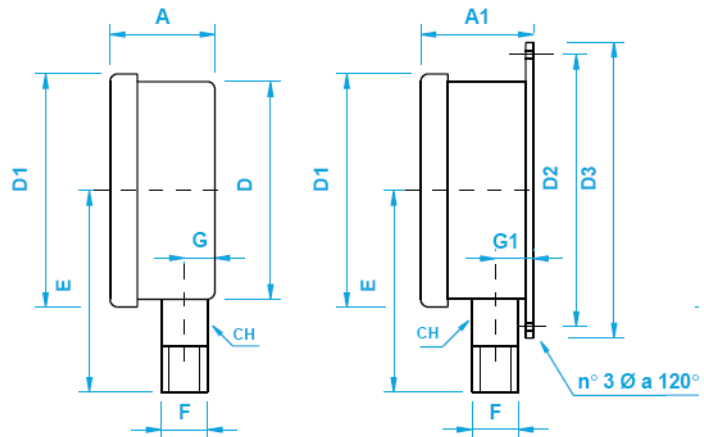

The measured data of the sensors is evaluated by the RCT electronic:

- *As visually readable analogue information and/or*
- *Into digitally usable information to be transferred to digital devices.*
- *All sensors are programmed from the factory to fit the respective transmission unit.*

Electronic sensors for float technology – mainly LPG tanks

RCT Standard – junior/senior

- Compatible with all common float gauges manufactured by Rochester Gauges and SRG
- For float gauges type Rochester senior please use the adapter 1000438!



RCT Standard – SRG type 705

- Compatible with SRG float gauges manufactured until 1993
- The position of the Magnet is deviant from the standard by approx. 14% bottom wise!



RCT Standard – type Livello

- Compatible with float gauges manufactured by Livello
- Scale direction anti-clockwise



RCT Standard – type linear/Cotrako

- Compatible with all common float gauges manufactured by Rochester Gauges, SRG and Cotrako
- Exclusively designed for tanks with linear withdrawal (square tanks)!



Original Rochester junior/senior

- On customer request we supply our equipment with original senior or junior hall-effect sensors manufactured by Rochester Gauges

Original Rochester Magnetel

- On customer request we supply our equipment with original Magnetel 8" and 4" hall-effect sensors manufactured by Rochester Gauges
- Each transmitter is programmed individually to the sensor in order to get maximum precision
- Due to the variety of sensors it is important that the customer specifies the exact sensor type



Ultrasonic sensors – Liquids/oil tanks/water tanks

Single sensor – Ø 20 mm

- For indoor use
- Reading is processed by a combined transmitter and receiver capsule
- Measuring range: 40 cm ... 400 cm (there's no reading and display of measuring result between 0 and 40 cm)
- Sensor diameter: 20 mm



Double sensor – Ø 40 mm

- For indoor use
- Reading is processed by two different capsules for transmitting and receiving the sound waves
- Measuring range: 10 cm ... 400 cm
- Sensor diameter: 40 mm



Ultrasonic sensor

- For indoor and outdoor use
- Measuring range: 15 cm ... 500 cm (individual adjustment on request)
- Sensor diameter: e.g. 1¼"
- Solid aluminium housing with male thread
- The measuring range of the sensor can be adjusted to the tank shape individually
- Measuring in cm-values



Sensors and respective monitoring solutions

Light sensor

- Monitoring of warning lights on machines and technical installations
- Fault signals are transferred by the radio-transmitter to the corresponding receiver units
- E.g. message forwarding of a machine fault with SMS directly to the mobile phone of the technician



Temperature sensor

- Registration of temperature in the range of -30 °C to +130 °C
- Alarm transmission if temperature exceeds or falls below a predefined set point; alternatively cyclic transmission of measured temperature can be used
- E.g. monitoring of refrigerators, rooms or pipes (room temperature, temperature sensing device)



Switch contact

- Connection to a dry contact of a technical installation
- Optionally available as open contact or make contact
- Fault transmission directly to the responsible technician – without any delays



Interface 4–20 mA

- Input for analogue signal 4–20 mA (industrial standard)
- Connection of almost any common sensor for data evaluation and transmission (pressure, temperature, humidity, ...)



Network adapter

- Separate connection unit to monitor a supply voltage of 230 V/DC
- Alarm messaging in case of variation of mains voltage



On customer request, RCT provides transmitter units for use in commercial available standard sensors such as pressure or temperature sensors.

RCT radio-transmitters communicate perfectly with the connected sensors and transfer the data via either:

- *Coded radio-signal*
- *Analogue telephone modem (not shown)*
- *GSM to the receiver devices.*

Battery powered: RF technology – for monitoring of tanks and technical installations up to 1,000 m radio range

Radio transmitter Ex zone 1 – with external antenna and magnetic foot

- Level measuring for underground LPG tanks
- Approval for use in explosive areas – ATEX zone 1



Radio transmitter Ex zone 2 – with internal antenna

- Level measuring for aboveground LPG tanks
- Approval for the use in explosive areas – ATEX zone 2



Radio transmitter – pulse counting

- For the use with pulse counting meter (e.g. gas, water, electricity)
- Steady transfer of meter reading by radio signal – e.g. to LCD receiver or GSM central office (Remote Profi Puls)
- Compatible to all common pulse counting devices (e.g. Elster)
- Pending on pulse counting device the unit can monitor the alarm contact

Radio transmitter with ultrasonic sensor

- Contactless level monitoring with ultrasonic technology
- Suitable for all common tank shapes – adjustment to tank shape with DIP switches (measuring range, round/square tank)
- With internal antenna for aboveground tanks or with external antenna for underground tanks, respectively for the use at unfavourable environment conditions



Battery powered: GSM technology – telemetry solutions for technical installations

Radio transmitter "Watchdog"

- Available with various sensors and for almost every field of application
- For example: message forwarding of faults of burners, machines, air conditioners; temperature monitoring of refrigerators; monitoring of warning lights



GSM transmitter Ex zone 2 – with internal antenna

- Level monitoring on aboveground LPG tank installations
- Direct level transmission from the tank to the PC with SMS (SIM card)

GSM transmitter Ex zone 1 – with external antenna

- Level monitoring on underground LPG tank installations
- Direct level transmission from the tank to the PC with SMS (SIM card)



GSM transmitter – with ultrasonic sensor

- Contactless level monitoring
- Suitable for all common tank sizes and shapes
- Input of tank geometry with PC (configuration of measuring range, round/square tanks)

GSM transmitter – with different sensors

- Due to different available sensors a wide range of applications can be covered
- E.g. forwarding of fault messages of burners, machines, refrigerators, light signals of warning lights, ...
- Direct data transmission to a central PC with SMS (SIM card)



With network support: GSM technology – telemetry solutions for technical installations with GSM technology

GSM transmitter – monitoring of gas meter

- Connection to a gas meter with pulse counting device (pending on application for gas, water, electricity)
- Regular transmission of the gas meter reading by SMS
- Data receiving with PC GSM modem



IH modem – with switch contact

- Connection to a technical installation to monitor and transfer faults
- Direct data transmission of alarms to a central PC – transmission of all messages by SMS with SIM card



GSM transmitter Remote Profi Puls

- Central monitoring unit – particularly suitable for monitoring of bigger objects such as apartment buildings with different tanks, gas meter or technical installations
- Meter tank and object monitoring – combination radio-transmission and GSM



Modem receiver GSM

- Worldwide transmission of liquid level or alarm messages via GSM for registration and evaluation on PC or mobile phone
- Parallel use with other RCT receivers/local data collection e.g. LCD display and simultaneously transmission of the data via GSM to a central office
- GSM card at customer's request



GSM PC modem "Starterkit"

- Receiving of the incoming messages of all installed GSM units and evaluation on PC
- Worldwide transmission of level- and alarm messages of different applications
- Data supply for data processing with RCT software




| Time | Status | Data |
|----------|--------|------------|
| 10:00:00 | OK | 1234567890 |
| 10:01:00 | OK | 1234567890 |
| 10:02:00 | OK | 1234567890 |
| 10:03:00 | OK | 1234567890 |
| 10:04:00 | OK | 1234567890 |
| 10:05:00 | OK | 1234567890 |
| 10:06:00 | OK | 1234567890 |
| 10:07:00 | OK | 1234567890 |
| 10:08:00 | OK | 1234567890 |
| 10:09:00 | OK | 1234567890 |
| 10:10:00 | OK | 1234567890 |
| 10:11:00 | OK | 1234567890 |
| 10:12:00 | OK | 1234567890 |
| 10:13:00 | OK | 1234567890 |
| 10:14:00 | OK | 1234567890 |
| 10:15:00 | OK | 1234567890 |
| 10:16:00 | OK | 1234567890 |
| 10:17:00 | OK | 1234567890 |
| 10:18:00 | OK | 1234567890 |
| 10:19:00 | OK | 1234567890 |
| 10:20:00 | OK | 1234567890 |
| 10:21:00 | OK | 1234567890 |
| 10:22:00 | OK | 1234567890 |
| 10:23:00 | OK | 1234567890 |
| 10:24:00 | OK | 1234567890 |
| 10:25:00 | OK | 1234567890 |
| 10:26:00 | OK | 1234567890 |
| 10:27:00 | OK | 1234567890 |
| 10:28:00 | OK | 1234567890 |
| 10:29:00 | OK | 1234567890 |
| 10:30:00 | OK | 1234567890 |
| 10:31:00 | OK | 1234567890 |
| 10:32:00 | OK | 1234567890 |
| 10:33:00 | OK | 1234567890 |
| 10:34:00 | OK | 1234567890 |
| 10:35:00 | OK | 1234567890 |
| 10:36:00 | OK | 1234567890 |
| 10:37:00 | OK | 1234567890 |
| 10:38:00 | OK | 1234567890 |
| 10:39:00 | OK | 1234567890 |
| 10:40:00 | OK | 1234567890 |
| 10:41:00 | OK | 1234567890 |
| 10:42:00 | OK | 1234567890 |
| 10:43:00 | OK | 1234567890 |
| 10:44:00 | OK | 1234567890 |
| 10:45:00 | OK | 1234567890 |
| 10:46:00 | OK | 1234567890 |
| 10:47:00 | OK | 1234567890 |
| 10:48:00 | OK | 1234567890 |
| 10:49:00 | OK | 1234567890 |
| 10:50:00 | OK | 1234567890 |
| 10:51:00 | OK | 1234567890 |
| 10:52:00 | OK | 1234567890 |
| 10:53:00 | OK | 1234567890 |
| 10:54:00 | OK | 1234567890 |
| 10:55:00 | OK | 1234567890 |
| 10:56:00 | OK | 1234567890 |
| 10:57:00 | OK | 1234567890 |
| 10:58:00 | OK | 1234567890 |
| 10:59:00 | OK | 1234567890 |
| 11:00:00 | OK | 1234567890 |

RF Technology

LCD receiver

- Display of liquid level in volume percent or liter
- LED – shines if level reaches predefined set point <20 %
- Reception of up to 4 radio transmitters
- Monitoring of battery power, functionality of radio transmitter and regular transmission
- Automatic receipt of radio signal
- Parallel use with other RCT receiver
- Power supply unit 230 V
- Mounting with wall brackets



Relay receiver

- To control different actions of a predefined event, i.e. depending on the liquid level or in case of an alarm, the actions could be to switch pumps or electronic valves
- Reception of up to 2 radio transmitters
- Monitoring of battery power, functionality of radio transmitter and regular transmission (visual warning signal with LED or relay control)
- Automatic receipt of radio signal
- Parallel use with other RCT receiver
- Power supply unit 230 V
- Mounting with wall brackets



Interface receiver

- Connective link between liquid level of tank and industrial controller
- The liquid level or alarm message is transferred to analogue signal of 4 ... 20 mA and output to control industrial applications
- Reception of 1 radio transmitter
- Monitoring of battery power, functionality of radio transmitter and regular transmission (visual warning signal with LED or relay control)
- Automatic receipt of radio signal
- Parallel use with other RCT receiver
- Power supply unit 230 V
- Mounting with wall brackets



RS 232 receiver

- Direct transmission of the liquid levels and alarm messages to PC
- Monitoring of up to 4 radio transmitters (optionally unlimited number)
- Connection to PC via RS 232 interface (serial interface) (USB adapter also available)
- Monitoring of battery power, functionality of radio transmitter and regular transmission (visual warning signal with LED or relay control)
- Automatic receipt of radio signal
- Parallel use with other RCT receiver
- Power supply unit 230 V
- Mounting with wall brackets



GSM Technology

GSM PC-Modem „Starterkit“


- Reception of the incoming messages of all installed GSM units and evaluation on PC
- Worldwide transmission of level- and alarm messages of different applications
- Data supply for data processing with RCT software (basic software is included in the starterkit free of charge)
- Data reception using SIM card of any provider.
No telephone line needed.
- Normally only one PC GSM modem per central office needed
- Easy configuration of all GSM units with PC or Notebook
- Re-configuration of GSM units directly from PC software



RCT Service GUI



Data Display



Optional: Message forwarding to mobile phone (software alarm forwarding)


RCT GSM Manager – Single-user version

- This software can manage the complete handling of all GSM units and replaces “RCT Service GUI” and “Data display”
- User friendly design with clearly presentation of all messages
- More options for managing and grouping the tanks and alarm situations
- New tools for data evaluation, graphic presentation and message forwarding
- Better customer tracking system due to database integration
- Compatible with all RCT transmitters
- Reporting options (e.g. listing)
- Acoustic warning in case of alarm messages arbitrary adjustable
- Network capability
- Mail forwarding of cyclic- and alarm messages



RCT GSM Manager – Enterprise version (database technology)

- Server-based – database integration of customer information and further processing
- Basic logic functionality identical to single-user version
- Projection of total demand with liter/volume information
- Projection of filling date
- Deactivation of gas supply or heating systems at the touch of a button (in combination with Remote Profi Puls)
- Collecting data request with Mobile Phone within a few seconds

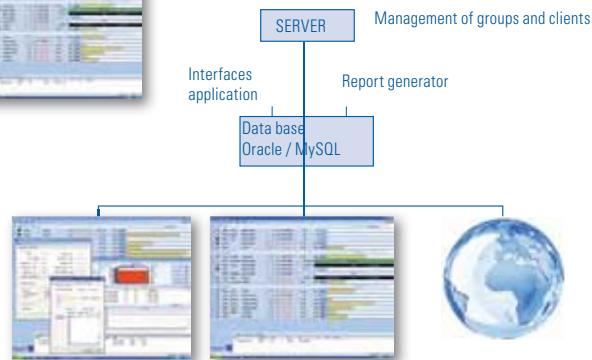

Clients Manager: Branch Office can monitor the liquid levels and are able to export the data

Web Server Application: Customer can see levels and messages via Internet (login needed)

Google Earth Application: Geographic presentation of all tanks and service stations

Pressure Regulators

Kosan Crisplant is able to offer pressure regulators that may be used in different kind of applications for industrial or domestic use.

Pressure regulators are necessary in order to enable the use of the stored or distributed gas for different applications, thereby ensuring the necessary reduction to fit the high pressure for different utilizations.

The information on pressure regulators is organised in the following ranges:

- High Demand First Stage Regulators
- First Stage Regulators
- Industrial and Commercial Second Stage Regulators
- Second Stage Regulators
- Twin Stage Regulators
- Adjustable High Pressure Regulators

Please bear in mind that in order to select the correct regulator size, the following information is necessary:

- Inlet pressure
- Outlet pressure
- Desired flow capacity
- Type of gas

All flow capacities in the tables are based on specific pressure conditions. For information on capacities in different conditions, please contact us.

Incorrect use or failure of pressure regulators may cause dangerous situations such as:

- High pressure than desired downstream from the regulator
- Leaks of gas on the regulator
- Lower pressure than desired downstream from the regulator
- Damage or accident as consequence of the previous situations

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

High Demand First Stage Regulators

Application

High demand first stage regulators are installed as the first stage regulator on gas installations as they are able to reduce the pressure from the 1st stage to an intermediate pressure before utilization (2nd stage).

In some cases, this kind of regulators may supply the gas directly to the industrial equipment.

By screwing or unscrewing the adjustment spring, or adding several spring ranges, it is possible to set the outlet pressure of the regulator.

| Part Number | Connections (FxF) NPT | Orifice | Outlet pressure Range (bar)* | Pin (Bar) | Vapour capacity Propane** (kg/hr) |
|-------------|-----------------------|---------|--------------------------------|-----------|-----------------------------------|
| 627 | 1" | ½" | 0.34 to 1.4 (setpoint 1,4 bar) | 13,8 | 1307 |
| | | | | 6,9 | 778 |
| | | | | 3,4 | 485 |
| | | | | 2,1 | 210 |
| 046 | ¾" | 3/8" | | 13,8 | 434 |
| | | | | 6,9 | 288 |
| | | | | 3,4 | 242 |
| | | | | 2,1 | 148 |
| | 1" | | | 13,8 | 878 |
| | | | | 6,9 | 530 |
| | | | | 3,4 | 275 |
| | | | | 2,1 | 152 |

* - For standard spring

** - Capacities based on outlet pressure of 1.4 bar, for butane capacity multiply by 1.064 for Nm³/h of NG, multiply by 0,80

OUTLET PRESSURE REGULATION SPRINGS

| 627 Outlet pressure range spring | Bar | 046 Outlet pressure range spring | Bar |
|----------------------------------|----------|----------------------------------|-----------|
| Yellow | 0,34-1,4 | Yellow | 0,20-0,69 |
| Green | 1,0-2,8 | Aluminium | 0,55-1,38 |
| Blue | 2,4-5,5 | White | 1,03-3,58 |
| Red | 4,8-10,3 | Green | 0,69-6,55 |
| - | - | Tan | 3,44-8,61 |



046



627

Application

These types of regulators are installed as the first stage regulator on LPG installations as they are able to reduce the pressure from the tank or the cylinder (1st stage) to an intermediate pressure before utilization (2nd stage). In some cases, this type of regulators may even supply the gas directly to the industrial equipment which should then be prepared to receive gas flow at high pressure.

Some types of regulators are adjusted from the factory without the possibility of changing the outlet pressure, while other types can be user adjusted by screwing or unscrewing the spring. Depending on the model, regulators may have an internal relief valve or/and pressure tap incorporated.

| REGO Part Number | Inlet | Outlet | Factory Outlet Pressure (bar) | Outlet pressure Range (mbar) | Vent position | Integral Relief Included | Vapour capacity Propane* (kg/hr) |
|------------------|----------|------------|-------------------------------|------------------------------|---------------|--------------------------|----------------------------------|
| LV3403TR | 1/4" NPT | 1/2" F.NPT | 0,69 | - | Over Outlet | YES | 31 |
| LV3403TRV9 | | | | | 9:00 | | |
| LV4403SR4 | 1/2" NPT | 1/2" F.NPT | 0,34 | 0,069 to 0,34 | Over Outlet | | 52 |
| LV4403TR4 | | | 0,69 | 0,34 to 0,69 | | | |
| LV4403SR9 | F.POL | | 0,34 | 0,069 to 0,34 | | | |
| LV4403TR9 | | | 0,69 | 0,34 to 0,69 | | | |
| LV4403SR96 | | 3/4" F.NPT | 0,34 | 0,069 to 0,34 | | | |
| LV4403TR96 | | | 0,69 | 0,34 to 0,69 | | | |

* Capacities based on inlet pressure 1.37 bar higher than setting pressure and outlet pressure 20% lower than setting pressure.



LV3403



LV4403

Industrial and Commercial Second Stage Regulators

Application

The industrial and commercial regulators are installed as the second stage regulator on a LPG installation as they are able to reduce the pressure from an intermediate pressure, downstream from a LPG cylinder or a LPG tank, to a utilization pressure.

Some types of regulators are adjusted from the factory without the possibility of changing the outlet pressure, while other types can be user adjusted by screwing or unscrewing the spring.

Depending on the model, regulators may have an internal relief valve or/ and pressure tap incorporated.

| Part Number | Connections (FxF) NPT | Orifice | Internal Relief Valve | Outlet pressure Range (mbar)* | Pin (Bar) | Vapour capacity Propane** (kg/hr) |
|-------------|-----------------------|---------|-----------------------|-------------------------------|-----------|-----------------------------------|
| 143-80-2 | 1" | | Yes | 30-70 (setpoint xxmbar) | 1,38 | 71 |
| | | | | | 0,69 | 48 |
| | | | | | 0,52 | 40 |
| | | | | | 0,34 | 31 |
| | ¾" | | | | 1,38 | 43 |
| | | | | | 0,69 | 34 |
| | | | | | 0,52 | 30 |
| | | | | | 0,34 | 25 |
| 243-8-2 | 1 ½" | | | 70-140 (setpoint xxmbar) | 1,70 | 304 |
| | | | | | 1,03 | 230 |
| | | | | | 0,69 | 183 |
| | | | | | 0,34 | 113 |
| | 2" | | | | 1,70 | 353 |
| | | | | | 1,03 | 247 |
| | | | | | 0,69 | 190 |
| | | | | | 0,34 | 116 |
| HSR | 1" | 1/4" | | 31-50 (setpoint 35mbar) | 2,75 | 107 |
| | | | | | 2,07 | 95 |
| | | | | | 1,38 | 76 |
| | | | | | 0,69 | 47 |

* - For standard spring

** - Capacities based on outlet pressure of 1.4 bar, for butane capacity multiply by 1.064 for Nm³/h of NG, multiply by 0,80



143



243

OUTLET PRESSURE REGULATION SPRINGS

| 143-80-2 Outlet pressure colors spring | Range (mbar) | 243-80 Outlet pressure colors spring | Range (mbar) | HSR Outlet pressure range spring | Range (mbar) |
|--|--------------|--------------------------------------|--------------|----------------------------------|--------------|
| Red | 9-16 | Green | 30-70 | Yellow | 15-20 |
| Blue | 13-21 | Orange | 69-137 | Silver | 25-31 |
| Green | 15-34 | Black | 137-293 | Gray | 31-50 |
| Orange | 29-68 | Cadmium | 206-448* | Pink | 50-87 |
| Black&White | 34-138 | White | 410-690* | Light Blue | 90-150 |
| Cadmium* | 34-206 | | | - | - |
| Black* | 137-413 | | | - | - |

* - Hp models only



HRS



HRS

Second Stage Regulators

Application

These regulators are installed as the second stage regulator on a LPG installation as they are able to reduce the pressure from an intermediate pressure, downstream from a LPG cylinder or a LPG tank, to a utilization pressure.

Some types of regulators are adjusted from the factory without the possibility of changing the outlet pressure, while other types can be user adjusted by screwing or unscrewing the spring. Depending on the model, regulators may have an internal relief valve or/and pressure tap incorporated.

| REGO Part Number | Inlet (F NPT) | Outlet (F NPT) | Factory Delivery Pressure @0,69 bar inlet pressure (mbar) | Outlet pressure Range (mbar) | Vent Position | Vapour capacity Propane (kg/hr) | Integral Relief Included | Obs. | | | | |
|------------------|---------------|----------------|---|------------------------------|---------------|---------------------------------|--------------------------|------|------------------|-----|--|------------------|
| LV4403B4 | 1/2" | 2 | 28 | 22-33 | Inlet | 20* | Yes | - | | | | |
| LV4403B46 | | 3/4" | | | | | | | | | | |
| LV4403B46R | | | | | | | | | Backmount design | | | |
| LV4403B66 | 3/4" | | | | | | | | 21* | - | Mounting bracket included; 90° connections | |
| LV4403B66R | | | | | | | | | | | | Backmount design |
| LV4403B66RA | | | | | | | | | | | | |
| LV4403B66RAB | | | | | | | | | | | | |
| LV4403H414 | 1/2" | 1/2" | 36 | 31-47 | Inlet | 14 | Yes | - | | | | |
| LV4403H4614 | | 3/4" | | | | | | | | | | |
| LV4403H6614 | | 3/4" | | | | | | | | | | |
| LV5504H414 | 1/2" | 3/4" | 34,8 | 17,4-39,8 | Inlet | 35** | | | | | | |
| LV5503H614 | 3/4" | | 39,8 | | | | | | | | | |
| LV5504620 | | | 49,8 | 27,3-69,7 | Outlet | | | | | | | |
| LV5503H620V | | | 49,8 | 69,7-209,3 | Inlet | | | | | | | |
| LV5503H640 | | | 99,7 | | Outlet | | | | | | | |
| LV5503H640V | | | 99,7 | | | | | | | | | |
| LV5504H814 | | | 3/4" | 1" | 34,8 | 17,4-39,8 | Inlet | 50** | | | | |
| LV5503H820 | 49,8 | 27,3-69,7 | | | | | | | | | | |
| LV5503H840 | 99,7 | 69,7-209,3 | | | | | | | | | | |
| LV5503B4 | 1/2" | 3/4" | 28 | 22-33 | Inlet | 33* | | | | | | |
| LV5503B6 | 3/4" | | | | | | | | | | | |
| LV5503B8 | 3/4" | | | | | | | | 1" | 47* | | |
| LV6503B14 | 1 1/2" | | | 21-35 | Inlet | 165* | | | | | | |
| LV6503B16 | 2" | | | | | | | | 200* | | | |

* Capacities based on 0,69 bar inlet pressure and 22 mbar delivery pressure.

** Capacities based on 0,69 bar inlet pressure and 20% drop of delivery pressure.



LV5503B



LV4403B

Twin Stage Regulators

Application

Twin Stage Regulators are compact solutions with the availability of reducing the pressure from LPG tanks or cylinders (1st stage) directly to utilization pressure maintaining the advantages of a two stage pressure regulation system.

Internally, they incorporate two different pressure reductions steps instead of only one as normal. Usually, the regulators are user tuned by screwing or unscrewing the spring.

Depending on the model, regulators may have an internal relief valve or/and pressure tap incorporated.

| REGO Part Number | Inlet (F NPT) | Outlet (F NPT) | Factory Delivery Pressure @6,89 bar inlet pressure (mbar) | Outlet pressure Range (mbar) | Bonnet Vent Position 1st Stage | Bonnet Vent Position 2nd Stage | Vapour capacity Propane* (kg/hr) | Accessories | | | | | | |
|------------------|---------------|----------------|---|------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------|-----------------------|---------|--|--|---------|---------|
| | | | | | | | | 1st Stage Vent Pipe-Away | 2nd Stage Vinyl Cover | Bracket | | | | |
| LV404B4 | 1/4" | 1/2" F. NPT | 28 | 22- 33 | Down | Outlet | 11 | 404PE | - | - | | | | |
| LV404B4V9 | | | | | 9:00 | | | | | | | | | |
| LV404B46 | | 3/4" F. NPT | | | Down | Outlet | | | | | | | | |
| LV404B46V9 | | | | | 9:00 | | | | | | | | | |
| LV404B9 | F. POL | 1/2" F. NPT | | | Down | Outlet | | | | | | | | |
| LV404B9V9 | | | | | 9:00 | | | | | | | | | |
| LV404B96 | | 3/4 F. NPT | | | Down | Outlet | | | | | | | | |
| LV404B96V9 | | | | | 9:00 | | | | | | | | | |
| LV404B23 | 1/4" | 1/2" F. NPT | | | Rear | Outlet | 4,5 | | | | | | 2302-55 | 2302-31 |
| LV404B29 | F. POL | | | | | | | | | | | | | |
| LV404B23V9 | 1/4" | | Left | 9:00 | | | | | | | | | | |
| LV404B29V9 | F. POL | | | | | | | | | | | | | |

* Capacities based on 6,89 bar inlet pressure and 22 mbar delivery pressure.



LV404B23



LV404B29V



LV404B23V9



LV404B9

High Pressure Industrial/Commercial Adjustable Regulators

Application

Adjustable pressure regulators represent the best solution when it is necessary to work with a wide range of settings on the same device.

Regarding the tank or cylinder pressure, this type of regulator is able to adjust the outlet pressure by use of a "Tee" handle. In order for the operator to adjust the pressure, the regulator normally has a pressure tap for manometer installation.

The regulators mentioned below are able to work with liquid or vapor. Downstream or upstream relief valve installation is recommended. Care must be taken to prevent re-liquefaction of propane at normal temperatures by heat tracing or other effective means.

| REGO Part Number | Adjustment Method | Connections (F NPT) | Recommended Delivery Pressure Range (bar) | Approx. dimensions (mm) | | Capacity Determined at Set Pressure of bar* | Capacity Kg/hr. Propane** |
|------------------|-------------------|---------------------|---|--------------------------------|------------------|---|---------------------------|
| | | | | Width between connections (mm) | Max. Height (mm) | | |
| 597FA | Tee Handle | 1/4" | 0,07 - 1,03 | 87 | 143 | 0,68 | 37 |
| 597FB | | | 0,7 - 2,07 | | | 1,38 | 63 |
| 597FC | | | 1,37 - 3,10 | | | 2,07 | 73,5 |
| 597FD | | | 2,8 - 7,0 | | | 2,76 | 93 |
| 1584MN | | 1/2" | 0,2 - 2,1 | 74 | 124 | 1,4 | 145 |
| 1584ML | | | 1,7 - 3,5 | | | 2,1 | 155 |
| 1584MH | | | 3,1 - 8,6 | | | 4,1 | 165 |
| 1586MN | | 3/4" | 0,2 - 2,1 | 89 | 178 | 1,4 | 227 |
| 1586ML | | | 1,7 - 3,5 | | | 2,1 | 248 |
| 1586MH | | | 3,1 - 8,6 | | | 4,1 | 289 |
| 1588MN | | 1" | 0,2 - 2,1 | | | 1,4 | 227 |
| 1588ML | | | 1,7 - 3,5 | | | 2,1 | 248 |
| 1588MH | | | 3,1 - 8,6 | | | 4,1 | 289 |
| | | | | | | | |

* Set pressure established with 6,89 bar inlet pressure and 5,28 kg/h for 59X series and 10,57 kg/h for 158X series.

**Capacity determined at actual delivery pressure 20% less than set pressure with inlet pressure 1,38 bar higher than the set pressure.



Ball Valves and Accessories

Kosan Crisplant can provide all kind of ball valves for LPG and fire fighting water networks plus accessories needed for a safe and efficient operation.

There is an enormous variety of technical and constructive ball valves in the world. Furthermore, local legislation may be different from place to place, thus requiring different types of ball valves. In this catalogue, we focus on making a brief presentation on the items used most frequently on Kosan Crisplant plants:

- Split body PN 16
- Split body ANSI 150
- Split body ANSI 300
- Wafer PN 16
- Wafer ANSI 150
- Wafer ANSI 300
- Namur Solenoid Valve 3/2 – 5/2 AT-EX EX II 2 GD EEX d IIC T6 SIL 3
- Position indicator box – Eexia IIC T6 ATEX AVAIAABLE

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.


For proper support contact one of the KC offices closest to your location.

VALVE INFORMATION

| Pos | PART NAME | Material |
|-----|-----------------------|--|
| 1 | BODY | 1,0619 |
| 2 | END CONNECTION BRIDE | 1,0619 |
| 3 | BALL | A182 - F304/A351 - Cf8 |
| 4 | STEM | A182-F316 |
| 5 | SCREW | CARBON STEEL DN15 CARBON STEEL DN80 DN 150- DN 200 |
| 6 | NUT | CARBON STEEL DN150 - DN200 |
| 7 | SPRING WASHER | CARBON STEEL |
| 8 | 90° STOP | CARBON STEEL |
| 9 | PACKING GLAND | A182-F316 |
| 10 | STEM SEAT | P.T.F.E. |
| 11 | HANDLE | CARBON STEEL |
| 12 | STEM SEAL | GRAPHOIL |
| 13 | O-RING | FKM (VITON®) |
| 14 | THRUST WASHER | P.T.F.E. |
| 15 | BODY SEAT | GRAPHOIL |
| 16 | BODY SEAT | P.T.F.E. |
| 17 | BALL SEAT | P.T.F.E. |
| 18 | SCREW | STAINLESS STEEL |
| 19 | SCREW | STAINLESS STEEL |
| 20 | BODY HANDLE DN150-200 | EN-GJL 250 |



8P0119

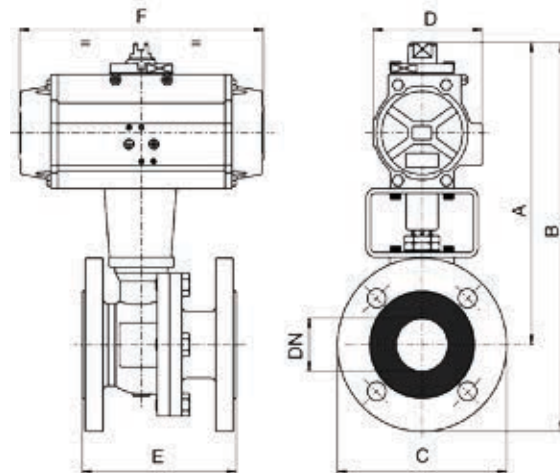

DIMENSIONAL DATA


| DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 |
|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|-------|
| PN | 40 | 40 | 40 | 40 | 40 | 40 | 16 | 16 | 16 | 16 | 16 | 16 |
| A | 148 | 174 | 195 | 198 | 237 | 261 | 282 | 318 | 344 | 366 | 441 | 507 |
| B | 195 | 227 | 253 | 268 | 312 | 343 | 375 | 418 | 454 | 491 | 583 | 677 |
| C | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 340 |
| D | 45 | 71 | 71 | 71 | 81 | 95 | 106 | 106 | 123 | 123 | 148 | 164 |
| E | 115 | 120 | 125 | 130 | 140 | 150 | 170 | 180 | 190 | 325 | 350 | 400 |
| F | 110 | 140 | 140 | 140 | 162 | 207 | 238 | 238 | 272 | 272 | 366 | 428 |
| ACT. | DA 32 | DA 52 | DA 52 | DA 52 | DA 63 | DA 75 | DA 85 | DA 85 | DA 100 | DA 100 | DA 125 | DA140 |
| RI | 3518 | 3519 | 3520 | 3520 | 3521 | 3522 | 3522 | 3523 | 3552 | 3552 | 3553 | 3554 |

VALVE INFORMATION

| Pos | PART NAME | Material |
|-----|--------------------------|--|
| 1 | BODY | A216-WCB |
| 2 | END CONNECTION BRIDE | A216-WCB |
| 3 | BALL | A182-F304 / A351-CF8 |
| 4 | STEM | A182-F04 |
| 5 | SCREW | CARBON STEEL DN125 CARBON STEEL DN150 - DN200 |
| 6 | NUT | STAINLESS STEEL DN125 STAINLESS STEEL DN150 - DN200 |
| 7 | SPRING WASHER | CARBON STEEL |
| 8 | 90° STOP | CARBON STEEL |
| 9 | PACKING GLAND | A182-F316 |
| 10 | STEM SEAT | P.T.F.E. |
| 11 | HANDLE | CARBON STEEL |
| 12 | STEM SEAL | GRAPHOIL |
| 13 | O-RING | FKM (VITON®) |
| 14 | THRUST WASHER | P.T.F.E. |
| 15 | BODY SEAT | GRAPHOIL |
| 16 | BODY SEAT | P.T.F.E. |
| 17 | BALL SEAT | P.T.F.E. |
| 18 | SCREW | CARBON STEEL |
| 19 | SCREW | CARBON STEEL |
| 20 | BODY HANDLE DN150-200 | EN-GJL 250 |



8P0123

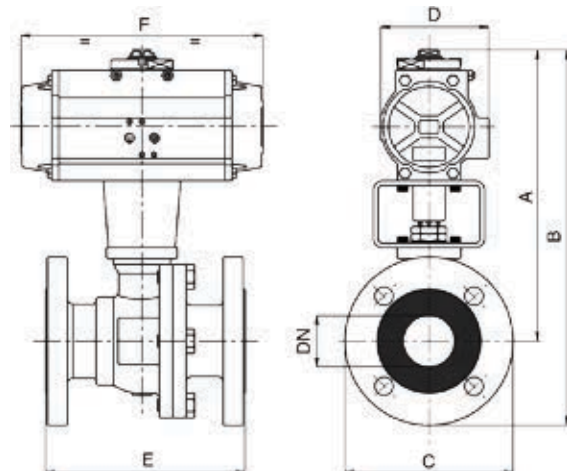

DIMENSIONAL DATA


| DN | 15 | 20 | 25 | 40 | 50 | 80 | 100 | 150 | 200 |
|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| PN | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| A | 148 | 174 | 195 | 237 | 261 | 318 | 344 | 441 | 507 |
| B | 193 | 224 | 250 | 302 | 336 | 413 | 459 | 583 | 677 |
| C | 90 | 100 | 110 | 130 | 150 | 190 | 230 | 285 | 340 |
| D | 45 | 71 | 71 | 81 | 95 | 106 | 123 | 148 | 164 |
| E | 108 | 117 | 127 | 165 | 178 | 203 | 229 | 394 | 457 |
| F | 110 | 140 | 140 | 162 | 207 | 238 | 272 | 366 | 428 |
| ACT. | DA 32 | DA 52 | DA 52 | DA 63 | DA 75 | DA 85 | DA 100 | DA 125 | DA 140 |
| RI | 3518 | 3519 | 3520 | 3521 | 3522 | 3523 | 3552 | 3553 | 3554 |

VALVE INFORMATION

| Pos | PART NAME | Material |
|-----|-------------------|---|
| 1 | BODY | A216-WCB |
| 2 | END CONNECTION | A216-WCB |
| 3 | BALL | A182-F304 / A351-CF8 |
| 4 | STEM | A182-F04 |
| 5 | SCREW | CARBON STEEL DN15 - DN40 CARBON STEEL DN50 - DN150 |
| 6 | NUT | CARBON STEEL DN15 - DN100 CARBON STEEL DN150 |
| 7 | SPRING WASHER | CARBON STEEL |
| 8 | 90° STOP | CARBON STEEL |
| 9 | PACKING GLAND | A182-F316 |
| 10 | STEM SEAT | P.T.F.E. |
| 11 | HANDLE | CARBON STEEL |
| 12 | STEM SEAL | GRAPHOIL |
| 13 | O-RING | FKM (VITON®) |
| 14 | THRUST WASHER | P.T.F.E. |
| 15 | BODY SEAT | GRAPHOIL |
| 16 | BODY SEAT | P.T.F.E. |
| 17 | BALL SEAT | P.T.F.E.+ Glass |
| 18 | SCREW | CARBON STEEL |
| 19 | SCREW | CARBON STEEL |
| 20 | BODY HANDLE DN150 | EN-GJL 250 |



8p0215

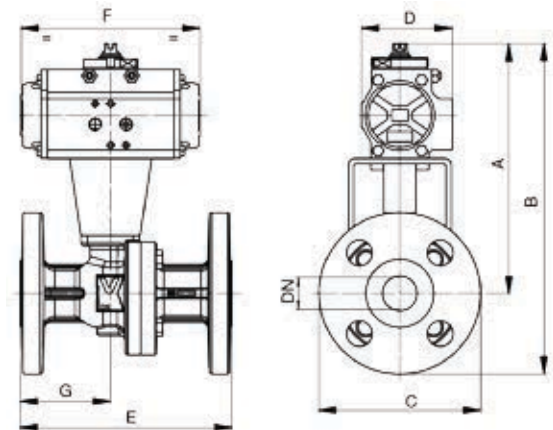


DIMENSIONAL DATA

| DN | 15 | 20 | 25 | 40 | 50 | 80 | 100 | 150 |
|------|-------|-------|-------|-------|-------|--------|--------|--------|
| PN | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| A | 173 | 188 | 206 | 253 | 272 | 330 | 374 | 475 |
| B | 220 | 247 | 268 | 331 | 355 | 435 | 501 | 635 |
| C | 95 | 118 | 125 | 155 | 165 | 210 | 255 | 320 |
| D | 71 | 81 | 81 | 95 | 106 | 123 | 137 | 187 |
| E | 140 | 152 | 165 | 190 | 216 | 283 | 305 | 403 |
| F | 140 | 162 | 162 | 207 | 238 | 272 | 328 | 522 |
| G | 62 | 61 | 71 | 79 | 86 | 81 | 89 | 172 |
| ACT. | DA 52 | DA 63 | DA 63 | DA 75 | DA 85 | DA 100 | DA 115 | DA 160 |
| RI | 3519 | 3829 | 3563 | 3526 | 3522 | 3552 | 3565 | 3554 |

Valves may be supplied with actuator


| VALVE INFORMATION | | |
|-------------------|---------------------------|---|
| Pos | PART NAME | Material |
| 1 | BODY | ASTM A105 - WCB |
| 2 | END CONNECTION | ASTM A105 - WCB |
| 3 | BALL | A351-CF8/ A182-F304 |
| 4 | BALL SEAT | P.T.F.E. |
| 5 | O-RING | FKM (VITON®) |
| 6 | THRUST WASHER | P.T.F.E. |
| 7 | RING | FKM (VITON®) |
| 8 | STEM SEAT | P.T.F.E. |
| 9 | PACKING GLAND | CARBON STEEL |
| 10 | END STOP | INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN150) |
| 11 | SPRING WASHER | CARBON STEEL |
| 12 | NUT | CARBON STEEL |
| 13 | STEM | A182 - F304 |
| 14 | HANDLE | CARBON STEEL |
| 15 | HANDLE DN 150-200 | CARBON STEEL |
| 16 | SCREW | CARBON STEEL |
| 17 | SCREW | CARBON STEEL |
| 18 | BODY HANDLE DN 150-200 | EN-GJL-250 |

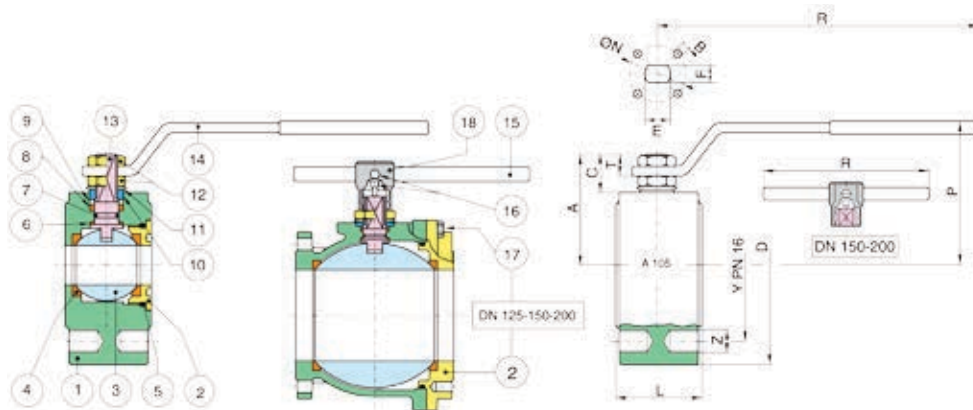

| DIMENSIONAL DATA | | | | | | | | | | | | | | | | | |
|------------------|-----|-----|-----|----------|------|-----|-----|-------|------|----|----|----|-----|---------|------|----|--------|
| SIZE | DN | D | Y | Z | L | R | P | A | C | T | E | F | ØN | B | Kv | PN | Kg |
| 1/2" | 15 | 90 | 65 | 4 x M12 | 35 | 131 | 65 | 47 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 16,3 | 16 | 1,30 |
| 3/4" | 20 | 100 | 75 | 4 x M12 | 40 | 131 | 69 | 51,5 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 29,5 | 16 | 1,90 |
| 1" | 25 | 110 | 85 | 4 x M12 | 46 | 174 | 80 | 61 | 19,5 | 11 | 12 | 8 | 42 | 4 X M5 | 43 | 16 | 2,70 |
| 1 1/4" | 32 | 130 | 100 | 4 x M16 | 54 | 174 | 84 | 65,5 | 16,5 | 11 | 12 | 8 | 42 | 4 X M5 | 89 | 16 | 4,20 |
| 1 1/2" | 40 | 140 | 110 | 4 x M16 | 63,5 | 250 | 102 | 78 | 24,5 | 13 | 16 | 10 | 50 | 4 XM6 | 230 | 16 | 5,90 |
| 2" | 50 | 150 | 125 | 4 x M16 | 82 | 250 | 111 | 87 | 25 | 13 | 16 | 10 | 50 | 4 XM6 | 265 | 16 | 8,70 |
| 2 1/2" | 65 | 175 | 145 | 4 x M16 | 103 | 321 | 128 | 104,5 | 28 | 18 | 20 | 14 | 70 | 4 X M8 | 540 | 16 | 15,50 |
| 3" | 80 | 190 | 160 | 8 X M16 | 122 | 321 | 138 | 115 | 28,5 | 18 | 20 | 14 | 70 | 4 X M8 | 873 | 16 | 20,50 |
| 4" | 100 | 220 | 180 | 8 X M16 | 152 | 381 | 156 | 137 | 34,5 | 22 | 24 | 18 | 102 | 4 X M10 | 1390 | 16 | 34,20 |
| 5" | 125 | 250 | 210 | 8 X M16 | 196 | 381 | 178 | 159 | 34 | 22 | 42 | 30 | 125 | 4 X M10 | 1707 | 16 | 52,50 |
| 6" | 150 | 300 | 240 | 8 X M20 | 232 | 700 | 266 | 201,5 | 51,5 | 30 | 42 | 30 | 125 | 4 X M12 | 2024 | 16 | 61,80 |
| 8" | 200 | 340 | 295 | 12 x Ø22 | 400 | 700 | 332 | 288 | 68 | 28 | 42 | 30 | 125 | 4 X M12 | 2720 | 16 | 104,00 |

Valves may be supplied with actuator


| VALVE INFORMATION | | |
|-------------------|------------------------|---|
| POS | PART NAME | Material |
| 1 | BODY | ASTM A105 - WCB |
| 2 | END CONNECTION | ASTM A105 - WCB |
| 3 | BALL | A351-CF8/ A182-F304 |
| 4 | BALL SEAT | P.T.F.E. |
| 5 | O-RING | FKM (VITON®) |
| 6 | THRUST WASHER | P.T.F.E. |
| 7 | O-RING | FKM (VITON®) |
| 8 | STEM SEAT | P.T.F.E. |
| 9 | PACKING GLAND | CARBON STEEL |
| 10 | END STOP | INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN150) |
| 11 | SPRING WASHER | CARBON STEEL |
| 12 | NUT | CARBON STEEL |
| 13 | STEM | A182 - F304 |
| 14 | HANDLE | CARBON STEEL |
| 15 | LEVA DN150-200 | CARBON STEEL |
| 16 | SCREW | CARBON STEEL |
| 17 | SCREW | CARBON STEEL |
| 18 | BODY HANDLE DN 150-200 | EN-GJL-250 |

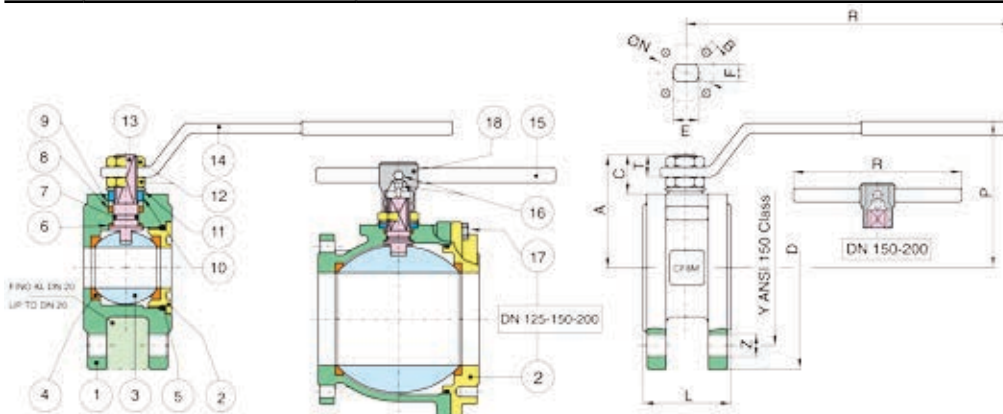

| DIMENSIONAL DATA | | | | | | | | | | | | | | | | | |
|------------------|-----|-----|-------|---------|------|-----|-----|-------|------|----|----|----|-----|---------|------|----|--------|
| Size | DN | D | Y | Z | L | R | P | A | C | T | E | F | ØN | B | Kv | PN | Kg |
| 1/2" | 15 | 90 | 61 | 4 X M14 | 35 | 131 | 65 | 47 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 16,3 | 20 | 1,30 |
| 3/4" | 20 | 100 | 70 | 4 X M14 | 40 | 131 | 69 | 51,5 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 29,5 | 20 | 1,80 |
| 1" | 25 | 110 | 80 | 4 X M14 | 46 | 174 | 80 | 61 | 17 | 11 | 12 | 8 | 42 | 4 X M5 | 43 | 20 | 2,20 |
| 1"1/4 | 32 | 118 | 89 | 4 X M14 | 54 | 174 | 84 | 64,5 | 15 | 11 | 12 | 8 | 42 | 4 X M5 | 89 | 20 | 3,30 |
| 1"1/2 | 40 | 127 | 99 | 4 X M14 | 63,5 | 250 | 102 | 78 | 24,5 | 13 | 16 | 10 | 50 | 4 X M6 | 230 | 20 | 3,30 |
| 2" | 50 | 150 | 121 | 4 X M16 | 82 | 250 | 111 | 87 | 25 | 13 | 16 | 10 | 50 | 4 X M6 | 265 | 20 | 5,50 |
| 2"1/2 | 65 | 175 | 140 | 4 X M16 | 103 | 321 | 128 | 104,5 | 25 | 18 | 20 | 14 | 70 | 4 X M8 | 540 | 20 | 9,60 |
| 3" | 80 | 190 | 153 | 4 X M16 | 122 | 321 | 138 | 115 | 28,5 | 18 | 20 | 14 | 70 | 4 X M8 | 873 | 20 | 12,80 |
| 4" | 100 | 220 | 191 | 8 X M16 | 152 | 381 | 156 | 137 | 34,5 | 22 | 24 | 18 | 102 | 4 X M10 | 1390 | 20 | 21,10 |
| 5" | 125 | 250 | 216 | 8 X M20 | 196 | 381 | 178 | 159 | 34 | 22 | 24 | 18 | 102 | 4 X M10 | 1707 | 20 | 37,50 |
| 6" | 150 | 280 | 242 | 8 X M20 | 232 | 700 | 266 | 201,5 | 51,5 | 30 | 42 | 30 | 125 | 4 X M12 | 2024 | 20 | 46,10 |
| 8" | 200 | 345 | 298,5 | 8 X Ø22 | 457 | 700 | 332 | 288 | 68 | 28 | 42 | 30 | 125 | 4 X M12 | 2720 | 20 | 124,00 |

Valves may be supplied with actuator

| VALVE INFORMATION | | |
|-------------------|------------------------|--|
| Pos | PART NAME | Material |
| 1 | BODY | ASTM A105 - WCB |
| 2 | END CONNECTION | ASTM A105 - WCB |
| 3 | BALL | A351-CF8/ A182-F304 |
| 4 | BALL SEAT | P.T.F.E. |
| 5 | O-RING | FKM (VITON®) |
| 6 | THRUST WASHER | P.T.F.E. |
| 7 | O-RING | FKM (VITON®) |
| 8 | STEM SEAT | P.T.F.E. |
| 9 | PACKING GLANG | CARBON STEEL |
| 10 | END STOP | INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN200 |
| 11 | SPRING WASHER | CARBON STEEL |
| 12 | NUT | CARBON STEEL |
| 13 | STEM | A182 - F304 |
| 14 | HANDLE | CARBON STEEL |
| 15 | HANDLE DN 150-200 | CARBON STEEL |
| 16 | SCREW | CARBON STEEL |
| 17 | SCREW | CARBON STEEL |
| 18 | BODY HANDLE DN 150-200 | EN-GJL-250 |

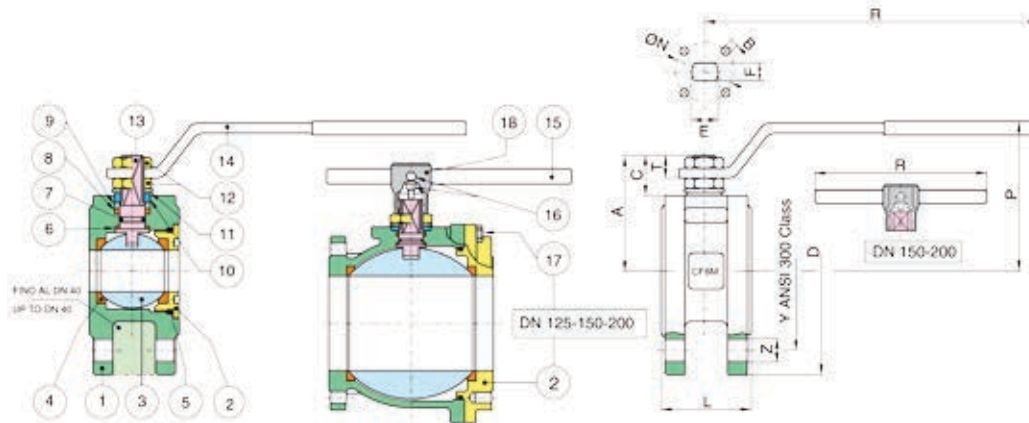

| DIMENSIONAL DATA | | | | | | | | | | | | | | | | |
|------------------|-----|-----|-------|----------|------|-----|-----|-------|------|------|----|----|-----|---------|------|----|
| Size | DN | D | Y | Z | L | R | P | A | C | T | E | F | Øn | B | Kv | PN |
| 1/2" | 15 | 95 | 66,5 | 4 x M14 | 35 | 131 | 65 | 47 | 11,5 | 8,5 | 10 | 7 | 32 | 4 X M5 | 16,3 | 50 |
| 3/4" | 20 | 120 | 82,5 | 4 x M18 | 40 | 131 | 69 | 51,5 | 9,5 | 8,5 | 10 | 7 | 32 | 4 X M5 | 29,5 | 50 |
| 1" | 25 | 120 | 89 | 4 x M18 | 46 | 174 | 80 | 61 | 13 | 11,5 | 12 | 8 | 42 | 4 X M5 | 43 | 50 |
| 1 1/4" | 32 | 130 | 98,5 | 4 x M18 | 54 | 174 | 84 | 64,5 | 16,5 | 11,5 | 12 | 8 | 42 | 4 X M5 | 89 | 50 |
| 1 1/2" | 40 | 150 | 114,5 | 4 x M20 | 63,5 | 250 | 102 | 78 | 20,5 | 12 | 16 | 10 | 50 | 4 XM6 | 230 | 50 |
| 2" | 50 | 165 | 127 | 8 X M18 | 82 | 250 | 111 | 87 | 16 | 12 | 16 | 10 | 50 | 4 XM6 | 265 | 50 |
| 2 1/2" | 65 | 190 | 149 | 8 X M20 | 103 | 321 | 128 | 104,5 | 18,5 | 17 | 20 | 14 | 70 | 4 X M8 | 540 | 50 |
| 3" | 80 | 210 | 168,5 | 8 X M20 | 122 | 321 | 138 | 115 | 21 | 18 | 20 | 14 | 70 | 4 X M8 | 873 | 50 |
| 4" | 100 | 254 | 200 | 8 X M20 | 152 | 381 | 156 | 137 | 23,5 | 21 | 24 | 18 | 102 | 4 X M10 | 1390 | 50 |
| 6" | 150 | 320 | 270 | 12 X M20 | 232 | 700 | 266 | 201,5 | 51,5 | 30 | 42 | 30 | 125 | 4 X M12 | 2024 | 50 |
| 8" | 200 | 380 | 330 | 12 X M24 | 317 | 700 | 310 | 245 | 51,5 | 30 | 42 | 30 | 125 | 4 X M12 | 2720 | 50 |

NAMUR SOLENOID VALVE 3/2 - 5/2 - ATEX EX II 2 GD EEX d IIC T6 SIL 3


MAIN CHARACTERISTICS

| | | | |
|----------------------|---|--------|-------|
| Body and Caps | Black anodized aluminum | 316 SS | Brass |
| Spool | Hard anodized aluminum PTFE impregnated | 303SS | - |
| Seals | Nitryl | | |
| Namur plate | Nylon 30% glass filled | | |
| Connections | ¼"(1); 1/8" (3 and 5) | | |
| Working pressure | 3-10 bar | | |
| Flow at 6 bar | 675 l/min (N) | | |
| Working temperature | -20°C to +80°C | | |
| Electric connections | M20 x 1.5 | | |
| Protection | IP66 | | |


Alternative Voltage:

- EV3-5/2 NAMUR 24 VDC
- EV3-5/2 NAMUR 24 VAC (50/60Hz)
- EV3-5/2 NAMUR 110 VAC (50/60Hz)
- EV3-5/2 NAMUR 240 VAC (50/60Hz)

Working scheme:

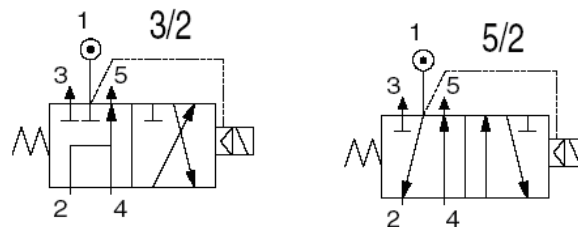


37000015

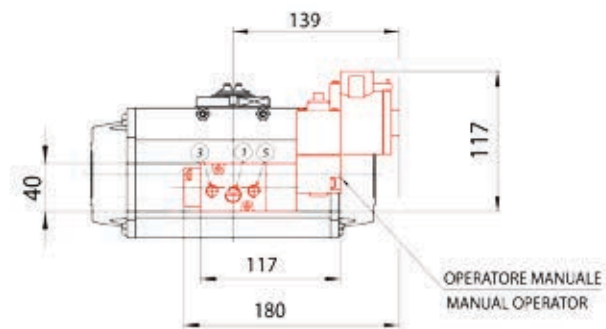


Base Namur per mod.32-200-270
Namur for mod.32-200-270

ADATTATORE 3/2-5/2
ADAPTER 3/2-5/2

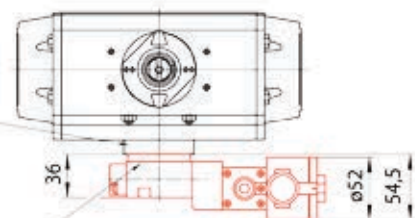

| Main Characteristics | |
|----------------------|---|
| Type | Explosion proof according to EEx d II B T4/T5/T6 |
| Body material | Chromate aluminium, polyester powder coated |
| Cover material | Chromate aluminium, polyester powder coated |
| Shaft material | Stainless steel |
| Protection | N°2 1/2" NPT (M20X1,5 optional) N°1 G3/4" (M25X1,5 optional) |
| Protection | IP67 |

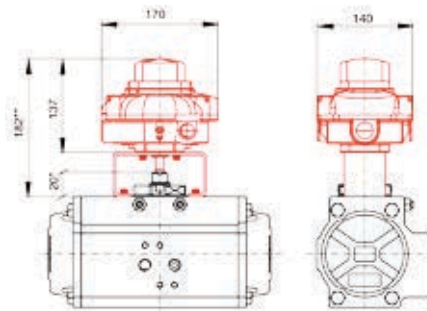

* 30 PER MOD. 115-125-140-160-200-270
 * 30 FOR MOD. 115-125-140-160-200-270
 ** 192 PER MOD. 115-125-140-160-200-270
 ** 192 FOR MOD. 115-125-140-160-200-270

Gas and Fire Detection

Kosan Crisplant is able to offer the most sophisticated fire and gas detection systems, making your plant an example of safety.

- General Description
- Equipment
 - Detectors
 - Series 47K
 - Series Ultima X
 - Flame guard XI, MI
 - SafEye
- Monitoring systems
- Complete fire & gas detection systems

Kosan Crisplant installs fire and gas detection systems designed and built by MSA, thus being able to offer reliable turn-key solutions for projects of any size.

MSA's long experience in gas and fire detection ensures reliable and secure protection of your personnel and facilities. We offer stand-alone or integrated solutions tailored to your specific safety philosophy and plant requirements. Safety assessment as well as ATEX 949 and IEC 61508 requirements will determine your choice of safety philosophy.

You can select the safest and most flexible method for your needs. Either a simple system or one with double or even triple redundancy. No matter what, we will offer you the right solution. It makes no difference whether you chose MSA products or products from another manufacturer that you or we suggest:

Talk to us, so that we can work together to design a safe system solution for your own specific needs.

Series 47K

The MSA Gas Detector Series

47K is designed to continuously

monitor the atmosphere for the

presence of potentially

explosive gases or vapour

ranging from 0 to 100% LEL.

It is designed to form an integral part of an MSA fixed gas detection system for the protection of industrial plants and workers.

Typical areas where the MSA Gas Detector Series 47K can be used include:

- LPG Filling Plants
- The chemical and petrochemical industry
- The paint and solvent-processing industry
- The gas-processing industry
- The steel-processing industry
- Municipal areas
- The production, warehousing, distribution, shipping and processing of gases and vapours

The MSA Gas Detector Series 47K consists of the Series 47K catalytic sensor and the junction box that contains the terminal board.

There are two versions of the junction box available:

- Flameproof [Ex d] with ¾" NPT cable gland thread.



GAS DETECTOR (SENSOR + JUNCTION BOX)

| DESCRIPTION MATERIAL THREAD | PART-NO |
|--|----------|
| Detector Series 47K-ST St.St. 304 M25 x 1.5 | 10048830 |
| Detector Series 47K-ST St.St. 316 M25 x 1.5 | 10048852 |
| Detector Series 47K-PRP St.St. 316 M25 x 1.5 | 10048853 |
| Detector Series 47K-ST St.St. 304 ¾" NPT | 10048857 |
| Detector Series 47K-ST St.St. 316 ¾" NPT | 10048858 |
| Detector Series 47K-PRP St.St. 316 ¾" NPT | 10048862 |

SENSOR

| DESCRIPTION MATERIAL THREAD | PART-NO |
|--|----------|
| Detector Series 47K-ST St.St. 304 M25 x 1.5 | 10063114 |
| Detector Series 47K-ST St.St. 316 M25 x 1.5 | 10048117 |
| Detector Series 47K-PRP St.St. 316 M25 x 1.5 | 10048118 |
| Detector Series 47K-HT St.St. 316 M25 x 1.5 | 10048199 |
| Detector Series 47K-ST St.St. 304 ¾" NPT | 10063115 |
| Detector Series 47K-ST St.St. 316 ¾" NPT | 10048271 |
| Detector Series 47K-PRP St.St. 316 ¾" NPT | 10048272 |
| Detector Series 47K-HT St.St. 316 ¾" NPT | 10048825 |

ACCESSORIES

| DESCRIPTION MATERIAL | PART-NO |
|---|----------|
| Calibration cap Plastic | 10049316 |
| Weather protection cap/hose connection St.St. 316 | 10051623 |
| Weather protection cap/ 1/8" pipe connection St.St. 316 | 10051731 |
| Weather protection cap/hose connection St.St. 304 | 10063145 |
| Weather protection cap/ 1/8" pipe connection St.St. 304 | 10063146 |
| Flow through adapter St.St. 316 | 10051625 |
| Flow through adapter Aluminium | 10051626 |
| Duct mount flange Aluminium | 10051627 |
| Wall mounted bracket, Sensor S47K-HT St.St. 316 | 10048829 |
| S47K Mounting Strap Ex e-junction box St.St. 316 | 10054042 |

ULTIMA X Series Gas Monitors

The ULTIMA X Series Gas Monitors are microprocessor-based point gas detectors/transmitters, designed for continuous monitoring of combustible and toxic gases as well as oxygen deficiency.

Housed in a rugged, 316 stainless steel, explosion proof enclosure, the ULTIMA XE and XIR (infrared) offer state-of-the-art design. Advanced sensing technologies using catalytic, electrochemical and infrared gas detection methods provide solutions for any need.

FEATURES & BENEFITS

- 316 stainless steel explosion-proof, multiple-entry mounting enclosure
- Advanced LCD display with detailed scrolling messages, not error codes
- 4 –20 mA Output
- Field-selectable algorithms for a variety of hydrocarbon based gases (XIR only)
- Single-board design for ultimate reliability and easy, no-tool servicing
- Optional “quick-check” LED’s for increased product visibility
- Optional field-programmable relays feature three alarm levels and one fault
- “Fail to Safety” Operation (XIR only)
- Interchangeable smart sensors: no reconfiguration required (not XIR sensor)
- Sensor replacement under power without declassifying a hazardous area (not XIR sensor)

Hazards

ULTIMA X Series Gas Monitors can protect against the following hazards:

- Combustible atmosphere
- Oxygen deficiency
- Toxic atmosphere
- Gas leaks

The XIR technology, based on dual wavelength heated optics, offers excellent long-term stability, eliminates the need for frequent calibrations and reduces the overall cost of ownership.

The ULTIMA X Series Gas Monitors are suitable for indoor and outdoor applications in virtually any industry including offshore.

They can operate completely standalone or connected to a control system (PLC, DCS etc.) with a standard 4–20 mA output.

Applications

ULTIMA X Series Gas Monitors are suitable for indoor and outdoor applications in virtually any type of industry including:

- Offshore
- Refineries
- Chemical and petrochemical facilities
- Steel mills
- Water and wastewater plants
- General industry



Ultima XE



Ultima XE

DISPLAY

- Large 1/2" high characters
- Highly visible coloured LEDs for "Normal" and "Alert" indication
- During normal operation the LCD alternates between gas reading and gas type. Quick-check of monitor status from afar
- LEDs indicate monitor status (Green = normal; Blinking red = alarm; Solid red = fault)
- In case of an error, the alert LED is on while the LCD identifies the error in a scrolling text message



ULTIMA X FACTORS

- Sensor disconnect-under-power. MSA's proprietary feature allows for sensor changeout without declassifying a hazardous area (patent pending).
- Interchangeable smart sensors. Pre-calibrated sensor modules are ready for installation out of the box. The sensors can be replaced in the field without the use of tools. The monitor quickly recognises the new sensor type and reconfigures alarm and relay settings to optimise the new sensor.
- State-of-the-art display. The LCD alternates between sensor reading and gas type plus features scrolling messages for ongoing diagnostic checks.
- World class design. Single-board design for ultimate reliability and serviceability. The multiple-entry mounting enclosure has been separated from the electronics and sensor, allowing for problem free installation and servicing.
- Onboard LEDs and relays. Optional quick-check LEDs and four relay outputs allow for better indication of alarm or error. The quick-check LEDs, viewable from afar, indicate normal (green) or alarm (red) status. The field-programmable alarm levels and energised/de-energised, opened/closed and latching/non-latching relay functions offer three levels of alarm and error.

The ULTIMA Calibrator offers the industry's simplest method of calibration: an easy-to-use 3-button device that allows calibration and address change of the ULTIMA X series Gas Monitor.



Calibrator

The ULTIMA Controller provides complete access to all features through its full function keypad.

Features include:

- Intrinsically safe
- Set/display alarm levels
- Set/display span gas value
- Set/display Ultima range
- Displays last date of calibration
- Displays minimum, maximum and average gas readings



Controller

Specifications (for ULTIMA XE and XIR unless otherwise stated)

| | |
|--------------------------|---|
| Gas Types | Combustibles, oxygen and toxics |
| Temperature Range | : -40 °C to +60 °C (-40°F to +140°F) (typical – some models may differ) |
| Drift: | Zero Drift <5% / year, typical Span Drift <10% / year, typical |
| Noise | <1% Full Scale |
| Accuracy | Repeatability ±1% Full Scale or 2 ppm, typical Linearity ±2% Full Scale or 2 ppm (O ₂ , CO) ±3% Full Scale (<50% LEL combustibles) ±5% Full Scale (>50% LEL combustibles) ±10% Full Scale or 2 ppm (non-CO toxics) |
| Response Times | t ₂₀ oxygen and toxics <12 seconds (typically 6 seconds) t ₅₀ oxygen and toxics <30 seconds (typically 12 seconds) t ₅₀ combustibles <8 seconds t ₉₀ combustibles <20 seconds t ₉₀ XIR <2 seconds (without sensor guard) |
| Humidity: | 15%–95% RH, non-condensing |
| Sensor Life | Oxygen and Toxics 2 years typical Combustibles 3 years typical Replacement warranty 1 year |
| Power Input: | 7–30 Vdc (oxygen and toxics) 7–30 Vdc @ 450 mA maximum (combustibles) (XIR) |

| | |
|-----------------------------|---|
| Wiring Requirements: | Combustibles (incl. XIR) 3-wire Oxygen and Toxics 2-wire; no LED's or relays Oxygen and Toxics 3-wire; LED's and/or relays |
| Signal Output: | 4–20 mA 2-wire current sink 4–20 mA 3-wire current source |
| Relay Contacts: | Rating 5 amp @ 220 Vac; 5 amp @ 30 Vdc Alarm Type normally energised/de-energised, SPDT, upscale/downscale, latching/ non-latching Fault Type normally energised, SPDT, non-latching |
| Conduit Entries: | Four entries, 3/4 inch NPT or 25 mm |
| Physical: | Weight 4.7 kg Dimensions 160.3 W x 99.3 D x 261.1 L mm Material 316 Stainless Steel |
| Approvals: | ULTIMA XE/XIR CE Low Voltage Directive: 73/23/EEC ULTIMA XE/XIR CE ATEX Directive: 94/9/EC and Remote Sensor CE EMC Directive: 89/336/EEC EN 50 270 Type 2 EN 50 081-1 ULTIMA XE II 2G EEx d IIC T4 -40 °C ≤ Ta ≤ +60 °C ULTIMA XIR II 2G EEx d IIC T5/T6 -40 °C ≤ Ta ≤ +60 °C T5 -40 °C ≤ Ta ≤ +50 °C T6 EC-Type Examination Certificate: DMT 02 ATEX E 202 X |
| Warranty: | 24 months on all components including IR sensor (does not include catalytic or electrochemical sensor) |

The SafEye Xenon 700 Series

Applications

The well proven technology of the SafEye with its excellent operational record in installations ranging from the deserts of Africa and Asia to the hot and humid Far East, the wet and cold North Sea and the dry cold regions of Alaska, has now become even better.

The SafEye is suitable for virtually all applications, including indoor and outdoor installations in:

- Offshore oil & gas exploration and production
- Fence line emission monitoring at industrial sites
- Petrochemical storage areas
- LNG/LPG storage, pumping and filling
- Pipelines
- Paint booths and paint production
- Bus terminals (natural gas powered vehicles)



- Infrared open path system detection
- Continually operating gas warning system monitoring combustible gases and vapours along open paths of up to 140 m in length in industrial installations.
- Can maintain operational integrity in up to 90% obscuration
- Heated optics to eliminate icing, condensation and snow
- Measuring range: 0 –5 LEL •m or 0 –2 LEL •m (IR channel)

FEATURES & BENEFITS

- High sensitivity and fast response to Hydrocarbon gases C1 – C8
- Heated optics to eliminate icing, condensation and snow
- Standard 4 –20 mA output and volt free relay contacts
- RS-485 output Modbus compatible
- Misalignment tolerance of ± 1 degree
- Totally immune to solar radiation, hydrocarbon flames and other external IR radiation sources
- Automatic gain control
- No false alarms
- One person commissioning
- No poisoning
- Robust stainless steel tilt mount
- Maintenance Call 3 mA signal
- Can maintain operational integrity in up to 90% obscuration
- 3 year warranty for complete SafEye
- 10 year warranty for Xenon flash lamp

INSTALLATION AND OPERATION

- Both source and detector are mounted on a robust tilt mount with a small installation footprint and easy X and Y adjustments.
- After mounting the source and detector with a clear line of sight, alignment is easily completed using a telescope.
- The intrinsically safe handheld diagnostic unit can be used to check that the installation and alignment has been completed successfully.
- The same handheld unit can be used for maintenance, trouble shooting and configuration. It provides information on the detector status, current gas reading, detector signals and serial number.

ORDERING INFORMATION

on request SafEye Xenon – Model 701

on request SafEye Xenon – Model 702

on request SafEye Xenon – Model 703

ACCESSORIES

10048609 Commissioning kit

10048608 Handheld unit



SafEye 700 Xenon



Technical Data

| | |
|---|---|
| System: | SafEye Xenon 700 Series Open-Path Detector |
| Detected gases | Simultaneous C1...C8 flammable gases |
| Detection response time | 190 max. 3 s |
| Operating range | Model 701: 4... 20 m |
| | Model 702: 15... 70 m |
| | Model 703: 50... 140 m |
| Immunity to false alarms | Unaffected by solar radiation, hydrocarbon flames and other external IR radiation sources |
| Spectral response | 2.0... 4.0 µm |
| Start-up time | < 60 s |
| Sensitivity ranges | Standard 0...5 LEL•m Optional 0...2 LEL•m |
| Displacement/ Misalignment tolerance | ± 1° |
| Drift, long term | ± 5% FS |
| Temperature range | Operating -40° to +55 °C |
| | Storage -40° to +55 °C |
| Power supply | 24 VDC (18...32 VDC) |
| Power consumption: (peak includes heated optics) | Detector 150 mA @ 24 VDC (300 mA peak) |
| | Source 100 mA @ 24 VDC (300 mA peak) |
| Electric input protection | Per MIL-STD 1275 |
| Electrical connection | Standard 2 x M25 x 1.5 |
| | Optional 2 x 3/4_-14 NPT |
| Heated window | to eliminate icing, condensation and snow on optics |
| Output, mA | 4...20 mA sink (source optional), |
| | 0 mA – fault |
| | 1 mA – zero calibration |
| | 2 mA – beam block/obscuration/misalignment |
| | 3 mA – maintenance call |
| | 4...20 mA – normal operation |
| Output, relay | alarm, fault and accessory with SPST volt free contacts |

| | |
|---|--|
| RS-485 Interface | The Modbus compatible RS-485 input/output provides complete data information to a PC and receives control commands from the PC or handheld unit. It also allows networking of up to 247 Detectors |
| Humidity: | 95% RH, non condensing |
| Approvals | SafEye and ATEX Directive 94/9/EC |
| | Handheld Unit EMC Directive 89/336/EEC |
| | SafEye II 2(1) GD EEx d e ia [ia] IIC T5 Ta – 40°C to +55°C |
| | EN 50270 Type 2, EN 61000-6-3 |
| | Handheld Unit II 1G EEx ia IIC T4 Ta – 20°C to +50°C |
| | EN 50081-1, EN 50082-2 |
| Ingress protection | IP 66/IP 67 |
| Environmental | meets MIL STD 810C for humidity, salt and fog, |
| | vibration, mechanical shock, high and low temperature |
| Detector and Source housing material | stainless steel 316 L |
| Tilt mount material | stainless steel 316 L |
| Weight | Detector 4.2 kg, Source 4.6 kg, Tilt mount 1.9 kg |
| Dimensions | Detector 210 x 145 x 154 mm |
| | Source 255 x 135 x 175 mm |
| | Tilt mount 120 x 120 x 140 mm |
| Accessories | Handheld diagnostic/calibration unit, (intrinsically safe approved) provides detector status, current gas reading, ability to analyse signals, advises detector serial number, model number, address if networked), change set-up and measuring range, and many other diagnostic tools |
| Alignment kit | including telescope and test filter |
| Warranty | 3 years for SafEye system |
| | 10 years for Xenon Flash lamp |

General method:

- *Detecting the unique optical characteristics of flames*
- *Distinguishing between flame radiation and background radiation*

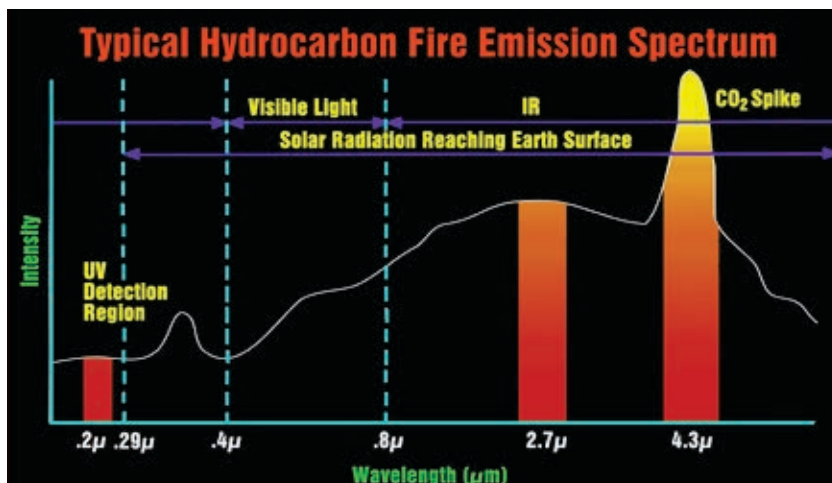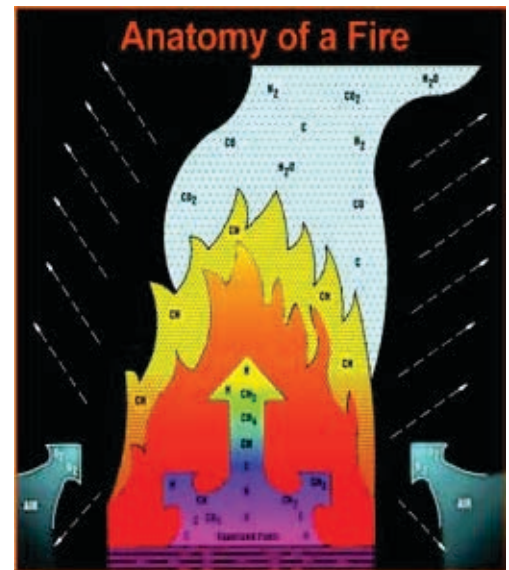

IR3 Technology

Most fire emission is due to hot CO₂ and H₂O molecules that are the main combustion products. In the IR3, the fire is considered to be an alternating infrared source that emits strongly at the CO₂ emission band and weakly at the background emission band.

Most IR sources (considered as IR false alarm stimuli) including the sun, incandescent and halogen lamps, arc discharge, electrical heaters, etc., do not possess this unique spectral feature.

Three spectral wavelength bands have therefore been selected for this flame detection technique:

Within the CO₂ spectral emission band

- Outside the CO₂ emission band
- Over a background broad band

The relation between each sensor signal allows the IR3 to distinguish between a fire and interfering IR stimuli. Further improvement of this IR analysis technique enables the accurate detection of a hidden smouldering fire where the radiating flames are not visible, but the hot mass of CO₂ gases are emitted and hence detected.

This technology has a very high immunity to false alarms without significantly decreasing the sensitivity and has been adopted as "standard requirement for high risk industries" and recommended by fire protection experts world-wide.

Optical Flame Detection

The new MSA XI and MI Flame Detectors incorporate all the features of the IR3 Flame-Gard with its patented triple IR sensor technology.

Together with the XI in an explosion-proof stainless steel enclosure there is also a smaller intrinsically safe low power version, the MI.

The MSA FlameGard is a self contained, triple-spectrum flame detector.

The sensor band pass has been carefully selected to ensure the greatest degree of spectral matching to the radiant energy emissions of fire, and the lowest degree of matching to non-fire stimuli.

The FlameGard IR3 XI is extremely sensitive. It can detect a 0.1 m² (1 ft.2) gasoline pan fire at 60 m in less than 5 seconds.

The sensitivity is user-programmable, offering 4 ranges of detection.



XI IR3



XI IR3

The IR3 XI incorporates both Automatic and Manual BIT (Built-In-Test).

The outputs of 4 –20 mA and RS-485 interface, as well as the standard alarm, accessory and fault relays, make the FlameGard IR3 the most diverse flame detector available.

The XI Flame Detector incorporates a new explosion-proof stainless steel housing with heated optics to eliminate condensation and icing on the window.

The FlameGard IR3 utilises Milspec. electronic components and materials. The MTBF (Mean Time Between Failure) is calculated to be 100,000 hours (11 + years).

This outstanding performance permits a 3-year warranty on the entire detector, not just the sensors.

Applications

The FlameGard Triple IR [IR3] Flame Detector has been designed as a general-purpose flame detector with special emphasis on immunity to false alarms. It has applications in a wide range of industrial and commercial facilities, where the threat of accidental fire involves hydrocarbon fuels.

Fires can be detected from gasoline, kerosene, diesel fuel, aviation jet fuels like JP-4, JP-5, JP-8, hydraulic fluids, paints and solvents, monomers and polymers like ethylene and polyethylene, natural gas (LNG), town gas and liquefied petroleum gas (LPG), hydrocarbon gases like methane, ethane, propane, butane, acetylene, propylene, etc.

- LPG filling plants
- Aircraft hangars (Commercial & Military)
- Petrochemical facilities
- Offshore platforms
- Printing industry
- Tank farms

FEATURES & BENEFITS

- Extremely sensitive [flame detection]
- Triple Spectrum Design
- High immunity to false alarms
- Automatic and Manual Built-In-Test
- Heated Optics [XI]
- RS-485 Modbus Compatible
- Sensitivity Selection
- User Programmable Function through a Handheld Unit
- MTBF minimum 100,000 hours
- 3-Year Warranty

TECHNICAL DATA & SPECIFICATION (XI AND MI UNLESS STATED OTHERWISE)

| | |
|-----------------------|--|
| Spectral response: | Three IR Channels |
| Detection | (highest sensitivity setting) |
| Range: | Hydrocarbons |
| Max. Detection range: | XI MI |
| | <ul style="list-style-type: none"> • 0.1 m² Gasoline fire 60 m 40 m • 0.1 m² n-Heptane fire 60 m 40 m • 0.1 m² Diesel Oil fire 42 m 28 m • 0.1 m² 95% Alcohol fire 45 m 30 m • 0.1 m² JP4 fire 45 m 30 m |
| Response time: | Typical 5 s |
| Time delay: | Adjustable up to 30 s |

SENSITIVITY RANGE:

Four sensitivity ranges for 0.1 m² (1 sq.ft) gasoline pan fire

| | MI | XI |
|---|----|----|
| 1 | 10 | 15 |
| 2 | 20 | 30 |
| 3 | 30 | 45 |
| 4 | 40 | 60 |

Monitoring Systems - 9010/9020 LCD



9010 LCD



9020 LCD

ESSENTIAL REQUIREMENTS

- Provide sensor PS
- Handle sensor signals
- Display values
- Provide digital/analog/ serial/ output signals
- Display failure codes
- Display cal error code
- Enable Cal/ Configuration by keyboard
- Provide real time self-diagnosis

ENHANCEMENTS

- 4-digit LCD
- Specific Flags
- SMD throughout
- Reverse output signal
- 20-4 mA
- Choice of reverse full scale 100-50/ 50-0 etc
- Configuration by SW
- relay/optocoupler
- Time-out
- input signal mA/mV
- 2-3 wire (also jumpers)
- autocal 4-20 mA current loop (one man)
- IP 65 wall mounting—accommodating up to five Modules 9020 Module in ABS housing

THE SOPHISTICATED HAZARDOUS GAS WARNING SYSTEM – ATEX 94/9/EC CERTIFIED

Two independent sensors (Dual Channel) per control module offering considerable cost savings, while maintaining high reliability and performance.

Modular design combined with dual channel capability allows for high density packaging in a single 19_ rack (up to 20 points).

A high level of reliability is possible as each Control Module is fitted with an independent AC/DC power supply transformer and logic circuit with software validated according to ATEX Directive 94/9/EC

MSA's new 9010/9020 LCD Control Units are designed to offer maximum flexibility to work in conjunction with a wide variety of remote sensors to provide reliable gas detection in a wide range of industries and applications.

Advanced design using SMD components throughout and innovative features put the 9010/9020 LCD Control Units one step ahead of any conventional gas warning system..

Ordering

| | |
|--------------------------------------|----------|
| Control Unit 9010 LCD 12 VA | 0705.710 |
| Control Unit 9010 LCD 25 VA | 0705.711 |
| Control Unit 9010 LCD without transf | 0705.712 |
| Control Unit 9020 LCD 12 VA | 0705.720 |
| Control Unit 9020 LCD 25 VA | 0705.721 |
| Control Unit 9020 LCD without transf | 0705.722 |
| Control Unit 9010LCD wall mount | 0705.713 |
| Control Unit 9020LCD wall mount | 0705.723 |
| Front Panel 9010 LCD | 0754.214 |
| Front Panel 9020 LCD | 0754.215 |



9020LCD Wallmount



9010-20 LCD

Setting Standards of Excellence in Gas Monitoring

On target gas levels and events, allowing full system diagnosis, supported by individual LEDs per channel, relays and internal buzzer. GasGard XL can easily be configured to accept up to eight remote gas sensors, depending on the number of individual plug-in input cards installed.

With two alarm levels per channel GasGard XL operates in together with MSA's well-proven remote gas sensors (flammable and toxic or Oxygen 4 –20 mA) as well as catalytic gas sensors.

FEATURES AND BENEFITS

- Expandable up to 8 independent channels using plug-in boards
- Robust wall mounted housing made from fire retardant ABS material grade
- Large graphic display with intuitive icons and all channels shown at a glance
- Special keys making all functions accessible from the front panel
- Multi-language display selectable via menu
- Fully configurable by key/laptop via USB or RS485 ModBUS connection
- Event log upload by galvanized isolated RS485 or USB
- Ethernet ModBUS TCP/IP
- Common relay board for first and second Alarm Level, Horn 1 and 2 or Failure
- Internal buzzer 85 dB
- Manual and "one-man" calibration with stored values

MSA's GasGard XL is a Multi-Channel Wall Mounted Controller for monitoring toxic, oxygen and flammable gases in industrial plants.

Due to its inherent versatility and easy use, GasGard XL provides protection from all potential hazardous conditions, in a variety of working environments and for virtually all health and safety applications.

GasGard XL offers reliability in a compact and robust wall mounted housing made from fire retardant ABS material.

The large, easy-to-read, multi-language LCD graphic display send out real time information.



TECHNICAL SPECIFICATIONS

| | |
|---------------------------------------|---|
| Power Supply | 85 VAC–265 VAC 50/60 Hz |
| | 24 VDC nominal |
| | [range 18 – 32 VDC] |
| Sensor Power Supply | constant current 80 mA– 430 mA |
| | 18 – 32 VDC |
| Connection Modes | 2, 3 wires |
| Terminal Board | Sensor connection for wires up to 2.5 mm ² |
| Input Signals | 0 – 200 mV DC, 4 –20 mA |
| Alarm Thresholds | ALARM 1 [Warning] adjustable from 5 to 100% f.s. [80% LEL for ATEX version] |
| | ALARM 2 [Alarm] adjustable from 5 to 100% f.s. [80% LEL for ATEX version] |
| Electronic Speed of Responsive | < 1s to reach 100% f.s. |
| Span/Zero Drift | < ±0.5% f.s. ±1 digit/month |
| Accuracy/Repeatability | < ±1% f.s. ±1 digit |
| Operating Temperature | –10 °C – +50 °C |
| Storage Temperature | –20 °C – +75 °C |
| Ambient Humidity | 90 % RH non condensing |
| Ingress Protection | IP56 |
| Approvals | ATEX 94/9/EC, EN 50270 [EMC], EN 50402, EN 61010-1 [Low Voltage Directive], EN 61779-1, EN 61779-4, SIL 2, cCSAus, CCCF [pending] |
| Dimensions [W x H x D] | 515 x 277 x 129 mm |
| Weight | 5 kg |
| | 8 kg [with battery] |
| Housing Material | ABS plastic high resistant fire retardant grade UL-94V-0 |
| Backup Battery | 2.2 Ah [optional] |

ORDERING:

GasGard XL

| | |
|--|----------|
| [incl.: housing, power supply 100 W, designed for up to four channels common relays, without channel boards] | 10090372 |
|--|----------|

GasGard XL

| | |
|---|----------|
| [incl.: housing, power supply 100 W, designed for up to eight channels common relays, without channel boards] | 10083905 |
|---|----------|

Accessories

| | |
|---|----------|
| Sensor extension board [for channels 5 – 8] | 10081676 |
| Channel relay board | 10081677 |
| Channel board 4 –20 mA | 10081674 |
| Channel board mV [bridge pellistors] | 10081675 |
| Back-up battery pack [2.2 Ah] with holder & screws | 10081772 |
| EMC filter [to be used with ext. 24 VDC supply] | 10081680 |

FEATURES

- Maximum 256 inputs and 512 outputs
- Compact: Up to 64 inputs and 80 outputs with one 19" rack
- FLEXIBLE
- Expanded input capability
- 4-20 mA sensors/transmitters
- Smoke, heat and flame detectors
- MAC's and switches
- Distributed CAN-Bus design
- Internal power supply (150W)
- Satellite units for minimal wiring
- Optional dual redundant system design
- ATEX approved
- TUV SIL 3 rating
- UL approval pending

BENEFITS

- Innovative modular design provides superior flexibility
- Simple to upgrade and add inputs and output modules
- Pricing advantages
- Easy to intergrate
- Profibus DP
- Modbus RTU
- Configuration management
- Set-up of inputs and outputs
- Alarm grouping
- Voting logic
- Complete turn-key systems

MODULAR DESIGN


- Input cards
- Output cards
- 4-20 mA
- Relays
- Configuration
- Back mount
- Rail mount
- Redundancy
- Dual
- Triple

INPUT REQUIREMENTS

- MAI (Module, Analog Input)
- Up-to 8 sensors per card
- MCI (Module, Current Input)
- Daughter board that connects to the MAI
- MAR (Module, Analog Redundancy)
- Daughter board that connects to the MAI
- MAT (Module, Analog Terminals)
- Up-to 8 sensors per module




Suprema Front

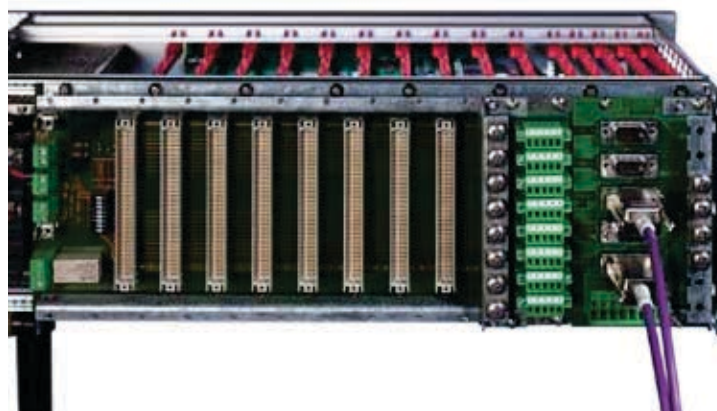

Suprema Back

CAN-Bus Architecture

- Communication Backbone
- Used in automotive industry
- Exclusive to Suprema components

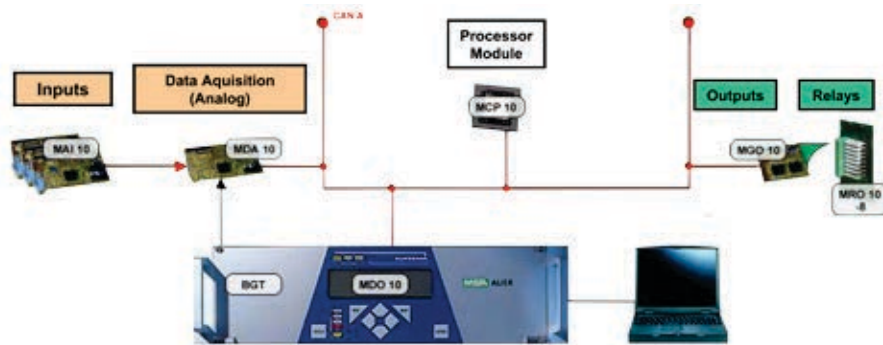

Redundancy


Double Redundancy

- Addition of second central processor card and data acquisition card
- Single Failure Safety - a single failure in the system can cause only a loss of one input or has no functional effect (but an error message)

Triple Redundancy

- Addition of third central processor card
- The third MCP compares results of the other two and provides a two out of three judgment in case of discrepancies
- This increases the reliability of the system – not the safety


Uses both CAN A and CAN B

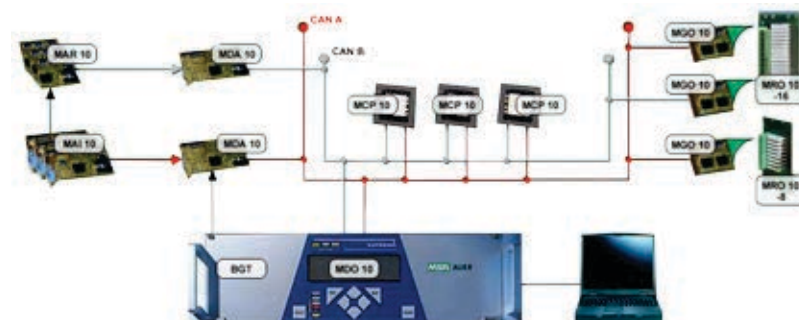

Triple redundancy

The central nervous system for 256 sensor.

Whith Suprema, you control everything from one central location.

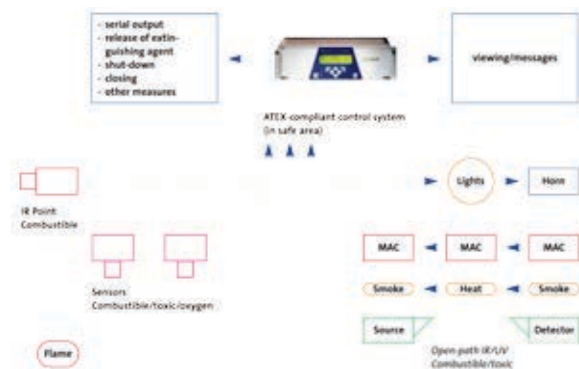

Domestic and Commercial LPG cylinders instalations

***Kosan Crisplant offers a wide
range of high quality products
for propane and butane
domestic and commercial
networks, such as: Automatic
Switches, Pressure Regulators
and Pressure Limiters***

These types of products are typically necessary for cylinder installations for domestic / recreational use as well as for commercial use. There is available a range for Butane and other range for Propane.

Please keep in mind that for a correct selection, the composition of LPG mixture and necessary pressures to be delivered should be known. All laws and local standards should always be kept in min before installation.

LPG equipments failures or improper use may cause dangerous situations such as:

- Too high a pressure downstream the regulator
- Regulator gas leak
- Too low a pressure downstream the regulator
- Damage or accident as consequence of previous situations.

The range Kosan Crisplant is offering is complete and matches several specifications and different demands from various markets. Nevertheless, if you do not find what you need on the following pages, we kindly ask you to contact us. We will do our best to provide the best solution for your need.

For proper support contact one of the KC offices closest to your location.

Automatic Change Over with Indicator and Accessories

Application

The automatic change-over ensures a continuous supply of gas to cylinder installations (more than one) switching automatically from an empty cylinder to a full one.

An indicator shows when this happens. It assure also the first stage pressure reduction.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|-------------------------------------|-------------|---|----------|--------------------|----------------------|
| Automatic Change Over for Propane | 20760+ | 8 kg/h | Cylinder | 1,5 bar | 20 x 1,5 ISO (MxMxM) |
| | 8790.34+ | 20 kg/h | | 1,5 bar | |
| | 12680.03+ | | | 3 bar | |
| | 20770+ | 50 kg/h | | 1,5 bar | |
| Service indicator | 12580 | Service indicator for Automatic Change Over – 8Kg/h Propane | | 20 x 1,5 ISO (FxM) | |
| Manometer for Automatic Change Over | 18042 | Manometer 0-1,5 bar for Propane Automatic Change Over | | Æ 13 Toric joint | |
| | 17795 | Manometer 0-3 bar for Propane Automatic Change Over | | | |



20760 & 20770



12580



18042

High and Fix Pressure Regulators

Application

The high and fix pressure regulators are usually installed downstream the cylinders or tank. It ensures the first stage pressure regulation.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|--|-------------|----------------|------------------|---------|----------------------------|
| High and Fix Pressure Regulators– 1st stage regulation | 8775.34 | 8 kg/h | Cylinder or tank | 1,5 bar | 20 x 1,5 ISO (FxM) - H |
| | 21750.1 | 40 Kg/h | | | 3/4 x 3/4 (MxM) - H |
| | 18318 | 100 kg/h | | | 3/4 x 20x1,5 ISO (FxM) - V |
| | 21740.8 | 40kg/h | | | |



8775



21740



21750

Pressure Limiters

Application

The pressure limiters are safety devices installed downstream the 1st stage regulation. It protects the installation from excessive pressure if the first stage fails.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|-------------------|-------------|----------------|-------------------------------------|----------|--------------------|
| Pressure Limiters | 8390.01 | 8 kg/h | Downstream the 1st stage regulation | 1,75 bar | 20 x 1,5 ISO (FxM) |
| | 21760.01 | 40 Kg/h | | | |
| | 18319 | 100 Kg/h | | | 3/4 x 3/4 (FxM) |



8390



21760

Safety Regulators

Application

The safety regulators are normally installed after the 1st stage regulator and immediately before the gas meters or burners.

They have three different functions: valve, pressure reduction, safety device and cutting the gas supply to the network if the pressure becomes lower than normal due a gas leakage.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|-------------------|-------------|----------------|-----------------|---------|--------------------------------------|
| Safety Regulators | 19020.3 | 4 kg/h | 0,5 to 1,75 bar | 39 mbar | 20 x 1,5 ISO (MxM) |
| | - | | | | (20x1,5 ISO) x 7/8 – Floating Flange |
| | 17650.03 | 5 kg/h | | 50 mbar | 20 x 1,5 ISO (MxM) |
| | 18050.3 | 8 kg/h | | 37 mbar | 3/4 x 3/4 (MxM) |
| | 12570/07 | 12 kg/h | | | |



19020

Low and Fix Pressure Regulators

Application

The low and fix pressure regulators should be installed downstream the 1st stage regulation.

They have the function of making the final gas pressure regulation to the appliance conditions.



19045 -34.35.36.37.38.39.40 &19050 -34.35.36



12600.07 & 18507/07

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|--|-------------|----------------|---------------------------------|----------|--------------------|
| Low and fix pressure regulators – 2nd Stage regulation | 19045.34 | 4Kg/h | Downstream 1st stage regulation | 37 mbar | 20 x 1,5 ISO (MxM) |
| | 14535.01 | | | | 20 x 1,5 ISO (FxM) |
| | 19045.36 | | | 67 mbar | 20 x 1,5 ISO (MxM) |
| | 19045.37 | | | 100 mbar | |
| | 19045.38 | | | 150 mbar | |
| | 19045.40 | | | 200 mbar | |
| | 19045.39 | | | 500 mbar | |
| | 19050.36 | 8 Kg/h | | 67 mbar | |
| | 19050.34 | | | 37 mbar | 20 x 1,5 ISO (FxM) |
| | 19050.35 | | | | 3/4 x 3/4 (MxM) |
| | 12600.07 | 12 kg/h | | | |

High and Adjustable Pressure Regulators with Manometer

Application

The high and adjustable pressure regulator with manometer allows the end user to regulate the pressure from 0 to 3 bars.

An incorporated manometer permanently shows the pressure value setting.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|---|-------------|----------------|------------------|---------|--------------------|
| High and adjustable pressure regulator with manometer | 8785.34 | 8 kg/h | Cylinder or tank | 0-3 bar | 20 x 1,5 ISO (FxM) |
| | 13260.34 | 40 Kg/h | | | |



8785/2 & 13260/34

Low and Adjustable Pressure Regulators with Manometer

Application

The low and adjustable pressure regulator with manometer allows the end user to regulate the pressure from 0 to 0,6 bar.

An incorporated manometer permanently shows the pressure value setting.

| | Part Number | Flow (Propane) | Pin | Pout | Obs. |
|--|-------------|----------------|-------------------------|-----------|--------------------|
| Low and adjustable pressure regulator with manometer | 14050.01 | 4 Kg/h | Garrafa ou Reservatório | 0-0,3 bar | 20 x 1,5 ISO (FxM) |
| | 14585/02 | | | 0-0,6 bar | |
| | 12610/07 | 12 Kg/h | | 0-0,3 bar | 3/4 x 3/4 (MxM) |



14050_01

Automatic Change Over with indicator and Accessories

Application

See the description of automatic change-over to Propane.

The difference is related to the capacity (flow) and regulation pressures.

| | Part Number | Flow (Butane) | Pin | Pout | Obs. |
|----------------------------------|-------------|--|----------|----------------|--------------------|
| Automatic Change Over for Butane | 18440.03 | 2,6 Kg/h | Cylinder | 28 mbar | 20 x 1,5 ISO (MxM) |
| | 12485.03+ | | | 500 mbar | |
| | 17790 | Manometer for Butane Automatic Change Over | | 13 Toric joint | |



12485.03



17790

Fix Pressure Regulators

Application

See the description of high and fix pressure regulators, safety regulators and low and fix pressure regulators. The difference is related to the capacity (flow) and regulation pressures..

| | Part Number | Flow | Pin | Pout | Obs. |
|-------------------------|-------------|----------|------------------|----------|-------------------------------------|
| Fix pressure regulators | 14570/03 | 2,6 Kg/h | Cylinder Or tank | 250 mbar | 20 x 1,5 ISO (MxM) |
| | 14380/02 | | | 28 mbar | |
| Safety regulators | 14800.03 | - | 0,1 to 0,6 bar | | 20 x 1,5 ISO (MxM) |
| | | | | | (20x1,5 ISO) x 7/8 –Floating Flange |
| | 13100.07 | | | | 6 Kg/h |



14380/02



14570/03



14800.03



KC ProSupply

The one-stop shop for gas components

Kosan Crisplant a/s

P.O. Pedersens Vej 22
DK-8200 Aarhus N
Denmark

Tel +45 8740 3000

Fax +45 8740 3010

sales@kosancrisplant.com

service@kosancrisplant.com

www.kosancrisplant.com

Worldwide sales of high-quality gas components

ProSupply Centre Denmark:

Tel +45 8740 3000

ProSupply Centre Portugal:

Tel +351 220 938 700

prosupply@kosancrisplant.com

www.kosancrisplant.com/prosupply

The Kosan Crisplant Group

